



August 15, 2025

MR. ARISTEO SAN AGUSTIN
37 OVAL, MABUHAY SUBD., BRGY. STA. LUCIA PASIG CITY
TEL#: 0917-8992122

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

* OPTION 2 *

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSM-IW10-WCT10M1M32 KOLIN WALL MOUNTED CERTUS SERIES AIRCONDITIONER 9,800 Kj/h (1.0HP) REGULAR INVERTER W/ WIFI R-32	29,995.00	18,796.20 /	PHP	18,796.20
3	UNIT/S	MODEL: KSM-IW15-WCT10M1M32 KOLIN WALL MOUNTED CERTUS SERIES AIRCONDITIONER 12,660 Kj/h (1.5HP) REGULAR INVERTER W/ WIFI R-32	32,995.00	21,076.20 /	PHP	63,228.60
1	UNIT/S	MODEL: KSG-IWF-30WFI-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	51,212.20 /	PHP	51,212.20
TOTAL UNIT COST					PHP	133,237.00
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	85,785.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	219,622.00

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).

*** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:


MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-08-25-0618
LCY-24%/4K/7K

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.
1854 Sta. Rita St., Guadalupe Nuevo, Makati City
Tel.: (632) 8852-6473
Fax: (632) 8852-2170 / (632) 8852-4792
www.kolinphil.com.ph / kolinphilippines

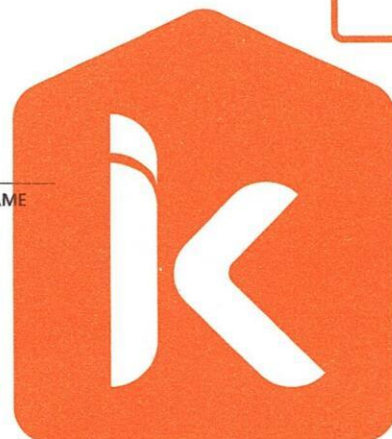

JRA JERRICO

Refrigeration and Air-conditioning Services

B4, 19 Felixvill, Mangahan, Sto. Niño Bilibiran, Binangonan Rizal

Email: jraairconditioning@gmail.com

Contact Nos. 09267189004/09615215615

Attn: Aristeo San Agustin

Date: Aug. 15, 2025

37 Oval, Mabuhay Subd., Brgy. Sta. Lucia

PASIG CITY, Metro Manila

Contact # 09178992122

BRAND & MODEL

Kolin

Room 2

KSM -IW10-WCT10M1M32

Wall Mounted 1.0hp

QTY

5 units

Area 8.5sqm.

Estimated pipe Length = 39ft.

Estimated Royal Cord = 44ft.

Initial charge

₱ 7,500.00

Includes:

Labor

10 ft. copper tube

10ft. Royal Cord

Outdoor bracket

Consumables

Installations Materials

Copper Tube

Royal cord (com. wire)

Royal cord (ACCU-BREAKER)

Pvc Blue

Circuit Breaker

Description

Qty

Price per qty

Subtotal

3/8 x 1/4

29ft.

350/ft

10,150.00

2mm x 4c

34ft.

100/ft.

3,400.00

3.5mm x 3c

5ft.

60ft

300.00

¾ x 10

2pcs.

150/pc

300.00

20A

1pc/s

1,000/pc/s

1,000.00

₱ 15,150.00

Estimated total Charges

₱ 22,650.00

Room 3

KSM -IW15-WCT10M1M32

Wall Mounted 1.5hp

Area 15.3sqm

Estimated pipe Length = 55ft.

Estimated Royal Cord = 60ft.

Initial charge

₱ 7,500.00

Includes:

Labor

10 ft. copper tube

10ft. Royal Cord

Outdoor bracket

Consumables

Installations Materials

Copper Tube

Royal cord (com. wire)

Royal cord (ACCU-BREAKER)

Pvc Blue

Circuit Breaker

Description

Qty

Price per qty

Subtotal

½ x 1/4

45ft.

350/ft

15,750.00

2mm x 4c

51ft.

100/ft.

5,100.00

3.5mm x 3c

5ft.

60ft

300.00

¾ x 10

4pcs.

150/pc

600.00

20A

1pc/s

1,000/pc/s

1,000.00

₱ 22,750.00

Estimated total Charges

₱ 30,250.00

Master Bedroom 2nd Flr.
KSM -IW15-WCT10M1M32
Wall Mounted 1.5hp

Area 15.16sqm

Estimated pipe Length = 15ft.

Estimated Royal Cord = 20ft.

Initial charge

₱ 7,500.00

Includes:

Labor

10 ft.copper tube

10ft.Royal Cord

Outdoor bracket

Consumables

Installations Materials

Copper Tube

Royal cord (com. wire)

Royal cord (ACCU-BREAKER)

Pvc Blue

Circuit Breaker

Description

Qty

Price per qty

Subtotal

½ x 1/4

5ft.

350/ft

1,750.00

2mm x 4c

10ft.

100/ft.

1,000.00

3.5mm x 3c

5ft.

60ft

300.00

¾ x 10

1pcs.

150/pc

300.00

20A

1pc/s

1,000/pc/s

1,000.00

₱ 4,350.00

Estimated total Charges

₱ 11,850.00

Master Bedroom Grand Flr.
KSM -IW15-WCT10M1M32
Wall Mounted 1.5hp

Area 17.9sqm

Estimated pipe Length = 17ft.

Estimated Royal Cord = 22ft.

Initial charge

₱ 7,500.00

Includes:

Labor

10 ft.copper tube

10ft.Royal Cord

Outdoor bracket

Consumables

Installations Materials

Copper Tube

Royal cord (com. wire)

Royal cord (ACCU-BREAKER)

Pvc Blue

Circuit Breaker

Description

Qty

Price per qty

Subtotal

½ x 1/4

7ft.

350/ft

2,450.00

2mm x 4c

12ft.

100/ft.

1,200.00

3.5mm x 3c

5ft.

60ft

300.00

¾ x 10

1 pcs.

150/pc

150.00

20A

1pc/s

1,000/pc/s

1,000.00

₱ 5,100.00

Estimated total Charges

₱ 12,600.00

Dining Area
KSG-IWF-30WFY-8K1M32
Wall Mounted 3.0hp

Area 43.8sqm

Estimated pipe Length = 15ft.
Estimated Royal Cord = 20ft.
Initial charge

₱ 8,500.00

Includes:

Labor

10 ft.copper tube

10ft.Royal Cord

Outdoor bracket

Consumables

Installations Materials

Copper Tube

Royal cord (com. wire)

Royal cord (ACCU-BREAKER)

Pvc Blue

Circuit Breaker

Description

Qty

Price per qty

Subtotal

5/8 x 1/4

5ft.

400/ft

2,000.00

2mm x 4c

10ft.

100/ft.

1,000.00

3.5mm x 3c

5ft.

60ft

300.00

3/4 x 10

1pcs.

150/pc

150.00

30A

1pc/s

1,000/pc/s

1,000.00

₱ 4,450.00

Estimated total Charges

₱ 12,950.00

TOTAL ESTIMATED CHARGES

₱ 90,300.00

Less discount of 5%

-4,515

DISCOUNTED TOTAL CHARGES

₱ 85,785.00 //

Installation Note:

1.Mechanical Plans ,Permits,Electrical permit not included.

2.Deflector,Masonry,carpentry,chipping & plastering ,finishing & restoration are not included in the installation

Mode of Payment

Cash or Bank Transfer After Installation

For installation payment method

Cash or Bank Transfer

Bank Details: Metro Bank

Account name: Jerico R. De vera

Account #: 3453345441418

Prepare by

Monaliza A. Pepito

CONFORME

Signature Over Printed Name

Jerico R. De Vera

Date: _____

Owner