

MR. KENDRICK CHUA
21 TAFT WEST GREENHILLS, BRGY. GREENHILLS, SAN JUAN CITY
TEL#: 0917-8190131

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION - **OPTION 2**

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
2	UNIT/S	MODEL: KL-IF60-G6H1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 58,140 Kj/h (5.0TR) FULL DC INVERTER R32 SINGLE PHASE	165,995.00	108,836.30	PHP	217,672.60
2	UNIT/S	MODEL: KLG-IF40-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 37,980 Kj/h (3.0TR) FULL DC INVERTER R-32 SINGLE PHASE	113,195.00	76,764.30	PHP	153,528.60
3	UNIT/S	MODEL: KSG-IWF-30WY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	49,680.30	PHP	149,040.90
1	UNIT/S	MODEL: KSM-IW25-WCT10M1M32 KOLIN WALL MOUNTED CERTUS AIRCONDITIONER 23,210 Kj/h (2.5HP) REGULAR INVERTER W/ WIFI R-32	49,995.00	32,996.30	PHP	32,996.30
4	UNIT/S	MODEL: KSM-IW20-WCT10M1M32 KOLIN WALL MOUNTED CERTUS SERIES AIRCONDITIONER 18,990 Kj/h (2.0HP) REGULAR INVERTER W/ WIFI R-32	41,995.00	27,076.30	PHP	108,305.20
2	UNIT/S	MODEL: KA-100MCARINV32 KOLIN WINDOW TYPE CREO SERIES AIRCONDITIONER 9,700 Kj/h (1.0HP) FULL DC INVERTER R-32 WITH REMOTE (WxDxH) 17.7"x26.6"x13.8"	24,995.00	17,696.30	PHP	35,392.60
TOTAL UNIT COST					PHP	696,936.20
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	276,390.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	973,326.20

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

FOR WINDOW TYPE: ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB, TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).

*** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-08-25-0612-rev2
BOD-26%/14K/7K/4K/1.3K

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines



August 18, 2025
KENDRICK CHUA
 21 Taft West Greenhills, Brgy Greenhills San Juan City
[0917-8190131](tel:0917-8190131)

MODEL	Qty
KLG-IF60-G6H1M32	2
KLG-IF40-5G1M32	2
KSG-IWF-30Wfy8K1M32	3
KSG-IWF-25Wfy8K1M32	1
KSG-IWF-20Wfy8K1M32	4
KAG-100WCINV	2

REV2

MAIDS ROOM	Area	10 sqm
-------------------	------	--------

ACU 1	1.0 HP Window type Inverter	KAG-100WCINV				
	Initial Charge					₱ 1,200.00
	Includes:					
	Labor					
	Consumables					
	Installation Materials	Description	Qty	Price per qty	Subtotal	
	Window type bracket		1 pc/s	₱ 600.00/pc	₱ 600.00	
	Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00	₱ 775.00

Estimated Charges	₱ 1,975.00
--------------------------	------------

KITCHEN AREA	Area	42 sqm
---------------------	------	--------

ACU 2	4.0 HP Floor Standing Inverter	KLG-IF40-5G1M32				
	Estimated Pipe Length = 30 ft					
	Estimated Royal Cord Length = 37 ft					
	Initial Charge					₱ 11,000.00
	Includes:					
	Labor					
	10ft Copper Tube					
	10ft Royal Cord					
	Indoor Bracket (Floor)					
	Consumables					
	Installation Materials	Description	Qty	Price per qty	Subtotal	
	Copper Tube	Ø 3/8" x Ø 5/8"	20 ft	₱ 400.00/ft	₱ 8,000.00	
	Royal Cord (comm. wire)	2.mm2 x 4C	27 ft	₱ 100.00/ft	₱ 2,700.00	
	Royal Cord (ACCU-Breaker)	5.5mm x 3c	5 ft	₱ 70.00/ft	₱ 350.00	
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00	
	Rubber Insulation	2 1/8" x 3/4" x 6'	5 pc/s	₱ 350.00/pc	₱ 1,750.00	
	Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00	
	Metal Clamp	3"	8 pc/s	₱ 120.00/pc	₱ 960.00	
	PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00	₱ 15,360.00

Estimated Charges	₱ 26,360.00
--------------------------	-------------

FOYER	Area	44 sqm
--------------	------	--------

ACU 6 4.0 HP Floor Standing Inverter KLG-IF40-5G1M32

Estimated Pipe Length = 57 ft

Estimated Royal Cord Length = 64 ft

Initial Charge ₱ 11,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	47 ft	₱ 400.00/ft	₱ 18,800.00
Royal Cord (comm. wire)	2.mm2 x 4C	54 ft	₱ 100.00/ft	₱ 5,400.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	5 ft	₱ 70.00/ft	₱ 350.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	10 pc/s	₱ 350.00/pc	₱ 3,500.00
Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
Metal Clamp	3"	14 pc/s	₱ 120.00/pc	₱ 1,680.00
Outdoor bracket	Fabricated wall	2 pc/s	₱ 5,000.00/pc	₱ 10,000.00
				₱ 41,030.00

Estimated Charges ₱ 52,030.00

LANAI, LANAI DINING	Area	57 sqm
----------------------------	------	--------

ACU 7 6.0 HP Floor Standing Inverter KL-IF60-G6H1M32

Estimated Pipe Length = 12 ft

Estimated Royal Cord Length = 19 ft

Initial Charge ₱ 14,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	2 ft	₱ 400.00/ft	₱ 800.00
Royal Cord (comm. wire)	2.mm2 x 4C	9 ft	₱ 100.00/ft	₱ 900.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	5 ft	₱ 70.00/ft	₱ 350.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	2 pc/s	₱ 200.00/pc	₱ 400.00
				₱ 8,450.00

Estimated Charges ₱ 22,450.00

MAIN LIVING AREA	Area	44.5 sqm
-------------------------	------	----------

ACU 8 6.0 HP Floor Standing Inverter **KL-IF60-G6H1M32**

Estimated Pipe Length = 10 ft

Estimated Royal Cord Length = 17 ft

Initial Charge ₱ 14,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Royal Cord (comm. wire)	2.mm2 x 4C	7 ft	₱ 100.00/ft	₱ 700.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	5 ft	₱ 70.00/ft	₱ 350.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	2 pc/s	₱ 200.00/pc	₱ 400.00
				₱ 7,450.00

Estimated Charges		₱ 21,450.00
--------------------------	--	-------------

SECOND FLOOR

ELLA'S ROOM	Area	24.6 sqm
--------------------	------	----------

ACU 9 2.0 HP Wall Mounted Inverter **KSG-IWF-20Wfy8K1M32**

Estimated Pipe Length = 12 ft

Estimated Royal Cord Length = 17 ft

Initial Charge ₱ 7,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	2 ft	₱ 350.00/ft	₱ 700.00
Royal Cord (comm. wire)	2.mm2 x 4C	7 ft	₱ 100.00/ft	₱ 700.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 3,000.00

Estimated Charges		₱ 10,500.00
--------------------------	--	-------------

PIA'S ROOM	Area	26 sqm
-------------------	------	--------

ACU 10 2.0 HP Wall Mounted Inverter **KSG-IWF-20Wfy8K1M32**

Estimated Pipe Length = 10 ft

Estimated Royal Cord Length = 15 ft

Initial Charge ₱ 7,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Royal Cord (comm. wire)	2.mm2 x 4C	5 ft	₱ 100.00/ft	₱ 500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 2,100.00

Estimated Charges		₱ 9,600.00
--------------------------	--	------------

KARA'S ROOM	Area	28 sqm
--------------------	------	--------

ACU 11 2.0 HP Wall Mounted Inverter **KSG-IWF-20WFY8K1M32**

Estimated Pipe Length = 10 ft

Estimated Royal Cord Length = 15 ft

Initial Charge ₱ 7,500.00

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Outdoor Bracket (Wall)
Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Royal Cord (comm. wire)	2.mm2 x 4C	5 ft	₱ 100.00/ft	₱ 500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 2,100.00

Estimated Charges	₱ 9,600.00
--------------------------	------------

HALLWAY	Area	37 sqm
----------------	------	--------

ACU 12 3.0 HP Wall Mounted Inverter **KSG-IWF-30WFY8K1M32**

Estimated Pipe Length = 20 ft

Estimated Royal Cord Length = 25 ft

Initial Charge ₱ 8,500.00

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Outdoor Bracket (Wall)
Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	10 ft	₱ 400.00/ft	₱ 4,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	15 ft	₱ 100.00/ft	₱ 1,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	2 pc/s	₱ 350.00/pc	₱ 700.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	3/4" x 10'	5 pc/s	₱ 150.00/pc	₱ 750.00
				₱ 13,250.00

Estimated Charges	₱ 21,750.00
--------------------------	-------------

PPIMARY BEDROOM	Area	31.5 sqm
------------------------	------	----------

ACU 13 2.5 HP Wall Mounted Inverter **KSG-IWF-25WFY8K1M32**

Estimated Pipe Length = 53 ft

Estimated Royal Cord Length = 58 ft

Initial Charge ₱ 8,500.00

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Outdoor Bracket (Wall)
Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	43 ft	₱ 400.00/ft	₱ 17,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	48 ft	₱ 100.00/ft	₱ 4,800.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	8 pc/s	₱ 350.00/pc	₱ 2,800.00

Full thread	3/8" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00	
Metal Clamp	3"	10 pc/s	₱ 120.00/pc	₱ 1,200.00	
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00	
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00	₱ 32,750.00

Estimated Charges	₱ 41,250.00
--------------------------	--------------------

ART ROOM	Area	22.5 sqm
-----------------	-------------	-----------------

ACU 14 2.5 HP Wall Mounted Inverter

KSG-IWF-25Wfy8K1M32

Estimated Pipe Length = 30 ft

Estimated Royal Cord Length = 35 ft

Initial Charge

₱ 8,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	20 ft	₱ 400.00/ft	₱ 8,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	25 ft	₱ 100.00/ft	₱ 2,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	8 pc/s	₱ 350.00/pc	₱ 2,800.00
Full thread	3/8" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Metal Clamp	3"	10 pc/s	₱ 120.00/pc	₱ 1,200.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 21,250.00

Estimated Charges	₱ 29,750.00
--------------------------	--------------------

Total Estimated Charges	₱ 276,390.00
--------------------------------	---------------------

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location based in floor plan. Recommendation not yet final.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for markings of each units and site visit before installation.need to open the ceiling.
- 4 Working days: Monday to Saturday, 8am- 5pm with parking.Need working permit.
- 5 Mechanical Plans, Permits, Electrical permits not included.
- 6 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 7 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , should be provided by customer's contractor.
- 8 **Final charges will be based on actual installation.**

Prepared by:

Customer Conformer:

Jeoffrey Dadios


Field Surveyor

Signature Over Printed Name

Reviewed by:

Engr. Kenneth Zamora

Service Supervisor Shop and
Field Operation

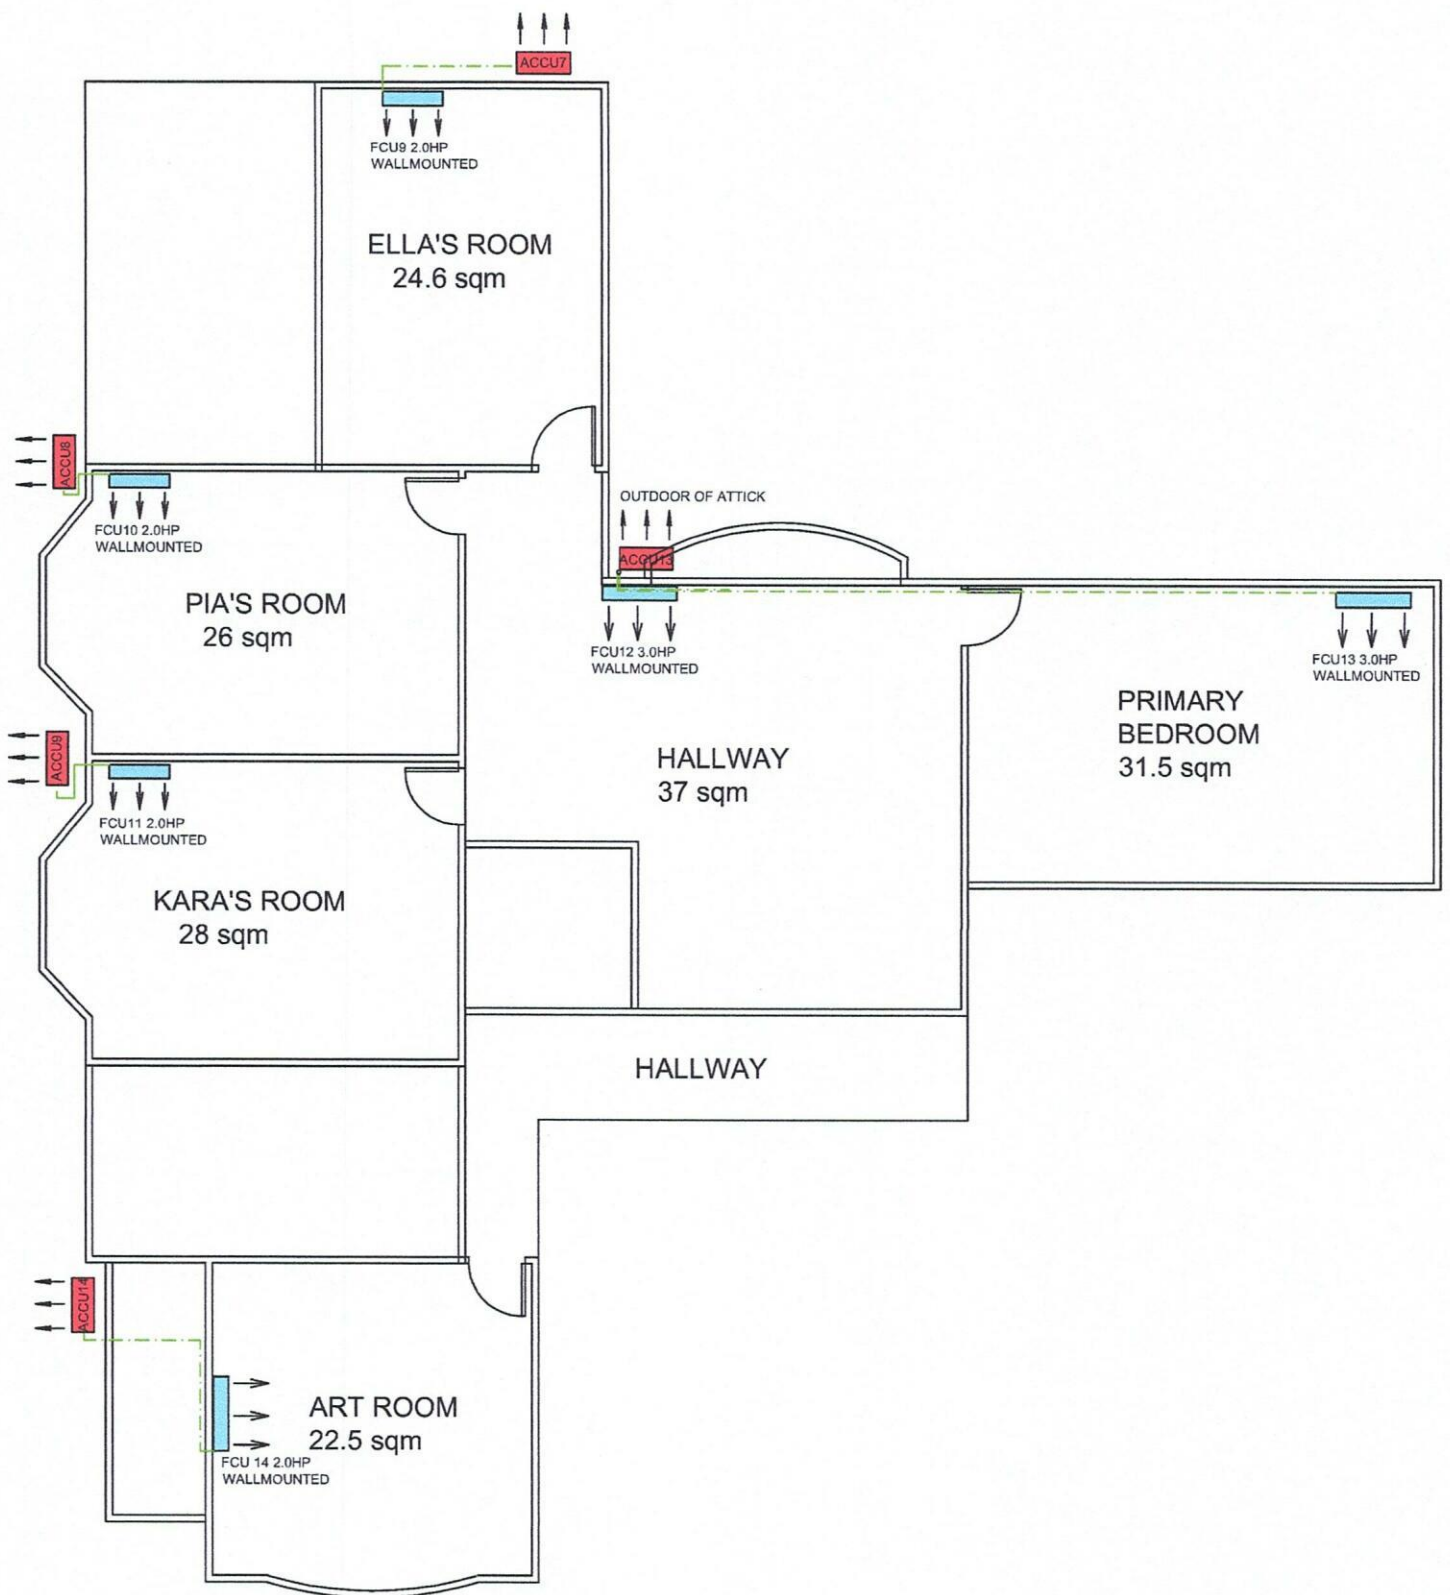

SECOND FLOOR