



August 18, 2025

ANGEL'S PIZZA - STA. ROSA BRANCH  
UNIT 3 AND 4, STA. ROSA COMMERCIAL COMPLEX, DIAMOND RD, CITY OF SANTA ROSA, LAGUNA  
ATTN: MR. KENNETH TANG  
TEL#: 0917-8408138

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION - **OPTION 2**

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
2	UNIT/S	MODEL: KLG-IF40-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 37,980 Kj/h (3.0TR) FULL DC INVERTER R-32 SINGLE PHASE	113,195.00	79,028.20	PHP	158,056.40
TOTAL UNIT COST					PHP	158,056.40
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	101,650.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	260,306.40

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**\*\* Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).**

**\*\*\* You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at [kmi\\_asst@kolinphil.com.ph](mailto:kmi_asst@kolinphil.com.ph)

Very Truly Yours,

  
JANELLE S. LIM  
KMI-ASSISTANT

Noted by:

  
MART NATHANIEL R. FLORES  
KMI-SUPERVISOR


Approved By:

  
MS. EDITHA M. FLORES  
AVP - FINANCE

KMI-QUOTE-08-25-0625  
JCY-24%/7K

Conforme:

SIGNATURE OVER PRINTED NAME

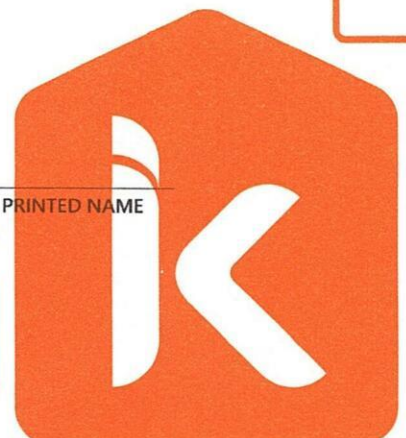



Airkohfrigus Refrigeration and Airconditioning Services  
Blk 3, Lot 10, AtDRAMAM, Parian Calamba Laguna  
Contact: 0939-2989-048

August 18,2025

Attention: Angel's Pizza Sta Rosa Laguna Branch

We are pleased to submit our Quotation for Installation of Aircon units

Option 2: Copper Tube Exposed  
2 units 4hp Floor Mounted Installation Only

Total Square meter: 90 sq.meter

Total Heat Load:123,000 KJ/hr

Note: No need to cover the open space near stair area going to second floor

Note: Client has existing 2 units 3hp wall mounted inverter in the area under operation. The two units has already been considered in the horse power recommendation which sums up the total horse power requirement vis-à-vis total heat load.

#### 1.Ground Floor

##### ACU#1 4HP Floor Mounted (Outdoor Unit located at Second Floor Service Area)

- Pipe length = 63 feet
- Royal Cord length = 63 feet

Initial Charges Includes:

1 <sup>st</sup> 10feet Copper tube with inclusion of $\frac{3}{4}$ drain first 10ft, Communication wire first 10ft, free indoor Bracket	P 11,000.00
Additional 3/4 Pvc drain (5pcs x 150)	P 750.00
Excess Tubing (5.3ftx400 per foot)	P 21,200.00
Royal Cord 53ft@100 per foot	P 5,300.00
Additional Material for Electrical Supply (7pcs.1/2 Orange PVC)	P 1,050.00
Outdoor Bracket (Special Bracket)	P 3,400.00
Electrical Supply (Main Panel to Outdoor Service Breaker)15 metersx300 per meter	P 4,500.00
Circuit Breaker (Breaker Box bolt on with breaker inclusion)	P 1,000.00

**Total ACU#1 48,200.00**



ACU#2 4HP Floor Mounted (Outdoor Unit located at Second Floor Service Area)

- Pipe length = 80 feet (Notes: Option 2 location of Indoor unit shall be followed)
- Royal Cord length = 80 feet

Initial Charges Includes:

1 <sup>st</sup> 10feet Copper tube with inclusion of ¾ drain first 10ft, Communication wire first 10ft, free indoor Bracket	P 11,000.00
Additional 3/4 Pvc drain (5pcs x 150)	P 750.00
Excess Tubing (70ftx400 per foot)	P 28,000.00
Royal Cord 70ft@100 per foot	P 7,000.00
Additional Material for Electrical Supply (9pcs. 3/4 Orange PVC)	P 1,350.00
Outdoor Bracket (Special Bracket)	P 3,400.00
Electrical Supply (Main Panel to Outdoor Service Breaker)21 metersx300 per meter	P 6,300.00
Circuit Breaker (Breaker Box bolt on with breaker inclusion)	P 1,000.00

<b>Total ACU#2</b>	<b>58,800.00</b>
<b>Total ACU 1&amp;2</b>	<b>107,000.00</b>
<b>Less Discount: 5%</b>	<b>5,350.00</b>
<b>Grand Total</b>	<b>101,650.00</b>

Upon confirmation of the above quotation, Fifty (50) percent downpayment shall be paid, while the remaining balance shall be paid after installation and start-up of units.

For cheque payment, please issue payable to Airkohfrigus Refrigeration and Airconditioning Services, while for bank deposit please deposit to the following BPI account details:

Account Name: Cesar Pulga Parado

Account No. 3589-3366-19

Prepared by:

  
Cesar Parado  
General Manager



Airkohfrigus Refrigeration and Airconditioning Services  
Blk 3, Lot 10, Attramam, Parian Calamba Laguna  
Contact: 0939-2989-048

### Heat Load Computation:

Commercial area (90sqm x 600) 54,000Kj/hr  
Occupants (30person x600) 18,000kj/hr  
Lighting (20pcs x36) 720kj/hr  
Sunlight exposure (50 percent) 41,000kj/hr  
Working Kitchen(10x1000) 10,000kj/hr  
Total Heat Load:123,000KJ/Hr

