



August 26, 2025

MR. VIRGILIO GONZALES  
2440 ONYX ST., BRGY. SAN ANDRES BUKID, MANILA  
TEL#: 0917-1451000 / 0905-3211694

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION - **OPTION 1**

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
3	UNIT/S	MODEL: KLG-IF40-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 37,980 Kj/h (3.0TR) FULL DC INVERTER R-32 SINGLE PHASE	113,195.00	79,028.20	PHP	237,084.60
1	UNIT/S	MODEL: KSG-IWF-30WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	51,212.20	PHP	51,212.20
TOTAL UNIT COST					PHP	288,296.80
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	83,650.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	372,546.80

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**\*\* Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).**

**\*\*\* You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi\_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM  
KMI-ASSISTANT

Noted by:

MART NATHANIEL B. FLORES  
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES  
AVP - FINANCE

KMI-QUOTE-08-25-0620-rev  
EMF-24%/7K

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines

August 26, 2025  
 VIRGILIO GONZALES  
 2440 Onyx St. Brgy San Andres Bukid, Metro Manila  
 0917-1451000/ 0905-3211694

MODEL	Qty
KLG-IF40-5G1M32	3
KSG-IWF-30Wfy8K1M32	1

EVENTS AREA	Area	139 sqm
-------------	------	---------

ACU 1 4.0 HP Floor Standing Inverter *KLG-IF40-5G1M32*  
 Estimated Pipe Length = 33 ft  
 Estimated Royal Cord Length = 38 ft  
**Initial Charge** ₱ 11,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	23 ft	₱ 400.00/ft	₱ 9,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	28 ft	₱ 100.00/ft	₱ 2,800.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	5 ft	₱ 70.00/ft	₱ 350.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Metal Clamp	3"	5 pc/s	₱ 120.00/pc	₱ 600.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 14,250.00

<b>Estimated Charges</b>	₱ 25,250.00
--------------------------	-------------

ACU 2 4.0 HP Floor Standing Inverter *KLG-IF40-5G1M32*  
 Estimated Pipe Length = 33 ft  
 Estimated Royal Cord Length = 40 ft  
**Initial Charge** ₱ 11,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	23 ft	₱ 400.00/ft	₱ 9,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	30 ft	₱ 100.00/ft	₱ 3,000.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	5 ft	₱ 70.00/ft	₱ 350.00
Circuit Breaker waterproof	40A/ 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Metal Clamp	3"	5 pc/s	₱ 120.00/pc	₱ 600.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 14,450.00

<b>Estimated Charges</b>	₱ 25,450.00
--------------------------	-------------

**ACU 3 4.0 HP Floor Standing Inverter****KLG-IF40-5G1M32**

Estimated Pipe Length = 10 ft

Estimated Royal Cord Length = 17 ft

**Initial Charge**

₱ 11,000.00

## Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

**Installation Materials**

Royal Cord (comm. wire) 2.0mm2 x 4C

Qty

Price per qty

Subtotal

Royal Cord (ACCU-Breaker) 5.5mm x 3c

7 ft

₱ 100.00/ft

₱ 700.00

Circuit Breaker waterproof 40A/ 1Ph

5 ft

₱ 70.00/ft

₱ 350.00

PVC blue 3/4" x 10'

1 pc/s

₱ 1,000.00/pc

₱ 1,000.00

2 pc/s

₱ 150.00/pc

₱ 300.00

₱ 2,350.00

**Estimated Charges**

₱ 13,350.00

**ACU 4 3.0 HP Wall Mounted Inverter****KSG-IWF-30Wfy8K1M32**

Estimated Pipe Length = 30 ft

Estimated Royal Cord Length = 35 ft

**Initial Charge**

₱ 8,500.00

## Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

**Installation Materials**

Copper Tube Ø 1/4" x Ø 5/8"

Qty

Price per qty

Subtotal

Royal Cord (comm. wire) 2.0mm2 x 4C

20 ft

₱ 350.00/ft

₱ 7,000.00

Royal Cord (ACCU-Breaker) 3.5mm x 3c

25 ft

₱ 100.00/ft

₱ 2,500.00

Circuit Breaker waterproof 30A/ 1Ph

5 ft

₱ 60.00/ft

₱ 300.00

PVC blue 3/4" x 10'

1 pc/s

₱ 1,000.00/pc

₱ 1,000.00

2 pc/s

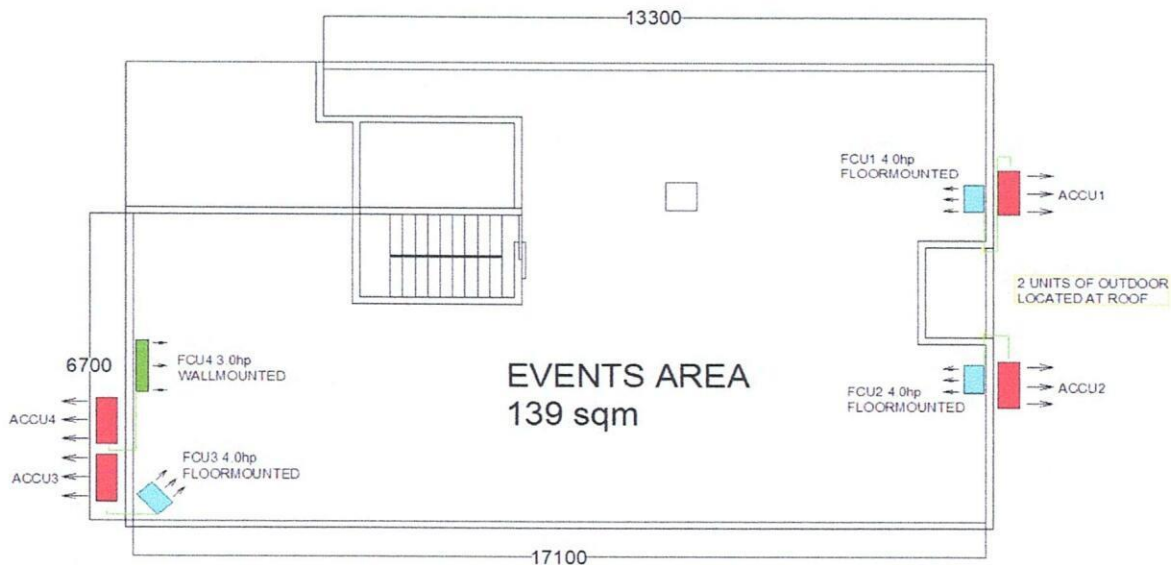
₱ 150.00/pc

₱ 300.00

₱ 11,100.00

**Estimated Charges**

₱ 19,600.00






Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

**Installation notes:**

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for marking and site visit before installation.
- 4 Copper tube expose inside the area. Customer will enlarge the window for access.
- 5 Bring plywood for indoor backing.
- 6 Customer will provide all outdoor Bracket at the roof and ACU3 and ACU4 With Ledge.
- 7 Working days: Monday to Saturday, 8am- 5pm with parking. Need working permit.
- 8 Mechanical Plans, Permits, Electrical permits not included.
- 9 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 10 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , should be provided by customer's contractor.
- 11 **Final charges will be based on actual installation.**


Prepared by:

  
**Jeffrey Dadios**  
Field Surveyor

Customer Conformer:

\_\_\_\_\_  
Signature Over Printed Name

Reviewed by:

  
**Engr. Kenneth Zamora**  
Service Supervisor Shop and  
Field Operation