



August 7, 2025

MS. CAROLINA ARMAS
204 SALCEDO MANSION, 109 TORDESILLAS ST. BRGY. BEL AIR, MAKATI CITY
TEL#: 0920-9622578

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSG-IWF-30WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	51,212.20	PHP	51,212.20
TOTAL UNIT COST					PHP	51,212.20
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	16,100.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	67,912.20

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).

*** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LHM
KMI-ASSISTANT

Noted by:

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-08-25-0603
ECY-24%/7K

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.
1854 Sta. Rita St., Guadalupe Nuevo, Makati City
Tel.: (632) 8852-6473
Fax: (632) 8852-2170 / (632) 8852-4792
www.kolinphil.com.ph / kolinphilippines



Airconditioning & Refrigeration Services
872 L22 17th., Brgy. 183 Villamor Pasay city Metro Manila 1300
Cellphone: 0917-1225048 / 0999-5573715
Email: zeusrafann053012@gmail.com / carcillarooffice01@gmail.com

*SUPPLY

*INSTALLATION

*CHECK-UP

*CLEANING

*PREVENTIVE MAINTENANCE

Installation Quotation

Armas, Carolina
204 Sakredo Mansion, 109 Tordesillas St. Brgy. Bel Air, MAKATI CITY
0920-9622578

August 06, 2025
AIQ 25-00030

Project name: Installation of Kolin Aircon

Description		QTY			
ACU 1	KSG-IWF-30WTFY-SKIM32	1			
	Estimated Pipe Length =	18ft			
	Estimated Royal Cord Length =	25ft			
Basic Installation (10ft copper tubing and communication wire)					\$,500.00
Installation materials		Description	QTY	Price Per QTY	SubTotal
Copper Tubing (excess of 10ft)		1 1/4"XS 8" new	8ft	450 ft	3,600.00
Royal Cord (excess of 10ft)		2 00mm2X4C	13ft	100 ft	1,300.00
Wire (Royal Cord-Bracker to ODL)		5 5mmX3C	20ft	60 ft	1,200.00
PVC Blue Pipe		Blue pipe 3/4"	3pcs	200 pc	600.00
PVC Drain Pipe		3/4x3m Blue	2pcs	200 pc	400.00
Circuit Breaker		30 Amp (NEMA 3RE-single phase)	1pc	1000 pc	1,000.00
Bracker Floor Type			0	0	0
					\$,100.00
Less Survey Fee					-500.00
TOTAL CHARGES					16,100.00

Bank details
China Bank Corporation
Account Name: Carcillar Airconditioning and Refrigeration Services
143602005343

GCASH
0999-5573715
Rafael Carcillar

Prepared by:
Melissa de Castro
Office Admin

Conformed by:



Airconditioning & Refrigeration Services

872 L22 17th., Brgy. 183 Villamore Pasay city Metro Manila 1300

Cellphone: 09995573715

Tel# (02) 8253-4637

Email: zeusrafan053012@gmail.com

DESIGN SUPPLY INSTALLATION CHECK-UP CLEANING PRE-PAID MAINTENANCE

SURVEY FORM

Customer Name ARMAS CAROLINA Date 8-5-25
 Address 264 SALCEDO IMPERIAL, 169 TUGUEVILLA ST. SUR No.
 Establishment Type Residential ☒ Commercial ☐ Area Surveyed blowing / sm
 Area Surveyed

Recommended Product Model : KR1-LWF-30WPV-8KIM32 PRIMUS INVERTER

Cooling Capacity Computation

Floor Area 33.58 sqm
 Ceiling Height 2.83 mtr
 note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed

Floor Area	<u>33.58</u>	x	550 Btu/h	<u>18,469</u> Btu/h
Ceiling Height (excess of 3 mtrs.)	<u>18,469</u>	x	20%	<u>3,694</u> Btu/h
Window Direct Sunlight	<u>18,469</u>	x	10% - 50%	<u>1,847</u> Btu/h
Total Cooling Capacity				<u>23,910</u> Btu/h

Add : Additional Heat Load

No. of Person	<u>2</u>	x	300 Btu/h	<u>600</u> Btu/h
No. of Ordinary Light (<40w)	<u>23</u>	x	200 Btu/h	<u>4,600</u> Btu/h
No. of Special Light (>40w)		x	400 Btu/h	
No. of Refrigerator (< 6 cu ft.)		x	400 Btu/h	
No. of Refrigerator (> 6 cu ft.)		x	800 Btu/h	
No. of Cooking Range		x	1500 Btu/h	
No. of Laptop Computer		x	150 Btu/h	
No. of Desktop Computer		x	400 Btu/h	
No. of Printer		x	500 Btu/h	
No. of Photocopier		x	1000 Btu/h	
Total Cooling Capacity				<u>25,515.9</u> Btu/h

Recommended Cooling Capacity

Note : Compressor warranty will be reduced to _____ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length

Scope of Work Agreement

1. Copper tube lay-out	☒ Expose	☐ Embedded
2. Chipping	☐ Included	☒ Not Included
3. Fabricated Bracket	☐ Yes ☐ Shop	☐ Site ☒ No
4. Service Ledge	☐ Yes	☐ No
5. Dismantling of existing Aircon	☐ Included	☒ Not Included
6. Ducting	☐ Yes	☒ No

Dimension :

- Plastering, carpentry and restoration works are to be done by the customer
- Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer
- Processing of mechanical plan, working permit, electrical permit are to be done by the customer
- Other concern

- Floor type ACU frame.
 - 09207625578
 Viber number



Airconditioning & Refrigeration Services

872 L22 17th, Brgy. 183 Villamore Pasay city Metro Manila 1300


Cellphone: 09995573715

Tel: (02) 8253-4637

Email: zeusrafinn053012@gmail.com

SURVEY FORM

Plan Lay-out

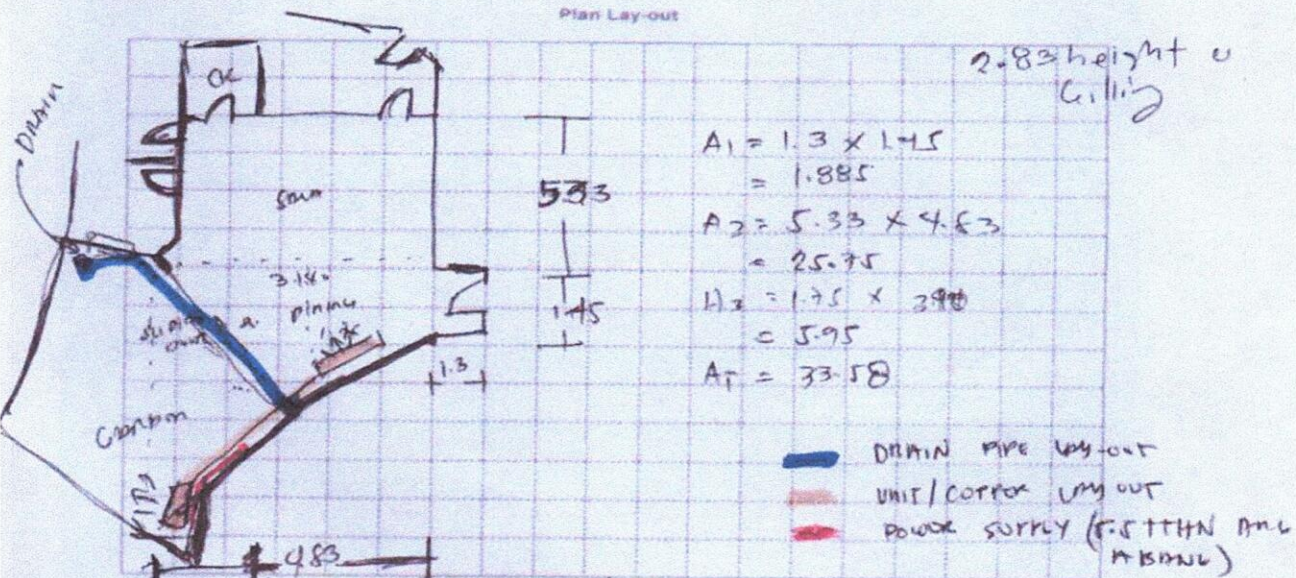

Indoor Unit Location

Outdoor Unit Location

Pipe Length

Special Note

- Left side of sliding door, up of wing
- DULU NG GARDEN DI KIRI NG DIO
- 18FT (1/4.5/8) 23FT wire

Installation Cost Estimate

Material Description	2330	2430	2520	3520	4620	Unit Cost	3/600
Copper Tube (excess of 10 ft)						150	1300
Wire (Royal Cord right wire) (excess of 10 ft)						100	1000
Wire (Royal Cord - Breaker to ODU)						60	1000
Circuit Breaker	20A	30A	40A/1ph	40A/3ph		1000	1000
Bracket (ODU)							
Bracket (VAC)							
PVC Pipe (drain)							
PVC Pipe (electrical)							
Drain Pump							
Drain Pump Hose							
Cutting Work							
Charging Fee (existing air conditioner)							
Initial Charge							
TOTAL ESTIMATE						8500	16,600

Note

- Initial Charge includes labor, 10ft Copper tube, 10ft Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials.
- Survey fee will be deducted in the installation fee.

Prepared By:

Signature Over Printed Name

Customer Confirm:

Signature Over Printed Name