



August 6, 2025

MS. KATE GOMEZ  
62 KARUHATAN ROAD, VALENZUELA CITY  
TEL#: 0917-1474191

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION - **OPTION 1**

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KL-IF60-G6H1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 58,140 Kj/h (5.0TR) FULL DC INVERTER R32 SINGLE PHASE	165,995.00	112,156.20	PHP	112,156.20
2	UNIT/S	MODEL: KSG-IWF-30WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	51,212.20	PHP	102,424.40
2	UNIT/S	MODEL: KSM-IW20-WCT10M1M32 KOLIN WALL MOUNTED CERTUS SERIES AIRCONDITIONER 18,990 Kj/h (2.0HP) REGULAR INVERTER W/ WIFI R-32	41,995.00	27,916.20	PHP	55,832.40
1	UNIT/S	MODEL: KSM-IW15-WCT10M1M32 KOLIN WALL MOUNTED CERTUS SERIES AIRCONDITIONER 12,660 Kj/h (1.5HP) REGULAR INVERTER W/ WIFI R-32	32,995.00	21,076.20	PHP	21,076.20
TOTAL UNIT COST					PHP	291,489.20
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	129,610.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	421,699.20

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**\*\* Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).**

**\*\*\* You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi\_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM  
KMI-ASSISTANT

Noted by:

MART NATHANIEL R. FLORES  
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES  
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

KMI-QUOTE-08-25-0600  
NG-24%/14K/7K/4K


Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines

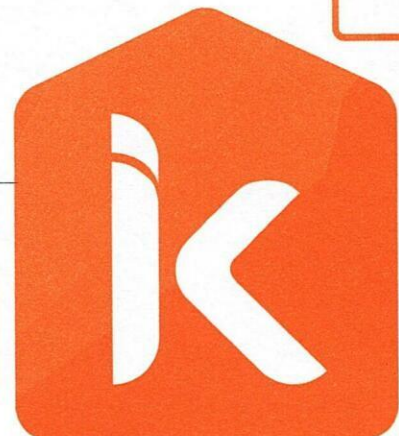



### KATE GOMEZ

62 Karuhatan Road, Valenzuela City.

Date: August 06, 2025

Quotation Number: KEMSV 072025-00053

### SUBJECT: Quotation for Installation of Air Conditioner

SJR No. 9234

We are pleased to present our quotation for the following service subject to the terms & conditions set forth hereunder:

#### I. MATERIALS :

Location : FCU 1 **Manager's Room**

Type : Wall Mounted Split Type 2.0HP- Kolin

Pipe Length : 34 Ft.

Wire Length : 41 Ft.

Initial Charge :

: Included

10 Ft. Copper Pipe 1/4x1/2  
10 Ft. ThnnWire 2.0mm2x4c  
Labor and other consumables

Php 6,700.00

: Excess

24 Ft. Copper Pipe 1/4x1/2 350 /Ft. Php 8,400.00  
31 Ft. ThnnWire 2.0mm2x4c 100 /Ft. Php 3,100.00  
7 Ft. ThnnWire 3.5mm2x2c 60 /Ft. Php 420.00  
1 Pc. Circuit Breaker 30 Amp 1000 /Pc. Php 1,000.00  
Fabricated Bracket ( c/o Customer )

Php 12,920.00

**FCU1 Installation Cost: Php 19,620.00**

Location : FCU 2 **Conference Room**

Type : Wall Mounted Split Type 2.0HP- Kolin

Pipe Length : 20 Ft.

Wire Length : 27 Ft.

Initial Charge :

: Included

10 Ft. Copper Pipe 1/4x1/2  
10 Ft. ThnnWire 2.0mm2x4c  
Labor and other consumables

Php 6,700.00

: Excess

10 Ft. Copper Pipe 1/4x1/2 350 /Ft. Php 3,500.00  
17 Ft. ThnnWire 2.0mm2x4c 100 /Ft. Php 1,700.00  
7 Ft. ThnnWire 3.5mm2x2c 60 /Ft. Php 420.00  
1 Pc. Circuit Breaker 30 Amp 1000 /Pc. Php 1,000.00  
Fabricated Bracket ( c/o Customer )

Php 6,620.00

**FCU2 Installation Cost: Php 13,320.00**

Location : FCU 3 **Admin Office**

Type : Wall Mounted Split Type 3.0HP- Kolin

Pipe Length : 42 Ft.

Wire Length : 49 Ft.

Initial Charge :

: Included

10 Ft. Copper Pipe 1/4x5/8  
10 Ft. ThnnWire 2.0mm2x4c  
Labor and other consumables

Php 7,700.00

: Excess

32 Ft. Copper Pipe 1/4x5/8 400 /Ft. Php 12,800.00  
39 Ft. ThnnWire 2.0mm2x4c 100 /Ft. Php 3,900.00  
7 Ft. ThnnWire 3.5mm2x2c 60 /Ft. Php 420.00  
1 Pc. Circuit Breaker 30 Amp 1000 /Pc. Php 1,000.00  
Fabricated Bracket ( c/o Customer )

Php 18,120.00

**FCU3 Installation Cost: Php 25,820.00**

#### MAIN OFFICE:

#### KENGIE ELECTRO MECHANICAL SERVICES

Unit 8, Gen T. De Leon Commercial Complex Karuhatan,  
Valenzuela City.

Land Number: 02 7623 9392

Mobile Number: 09175170189, 09360544485

Email Add: kengie10818@gmail.com

kemtsv1215@gmail.com

#### BRANCH OFFICE: CAGAYAN VALLEY

#### KENGIE ELECTRO MECHANICAL SERVICES

24 San Rafael St. Centro Amulung, Cagayan Valley

Mobile Number: 09453092426

Email Add: kengieservicescagayan@gmail.com



Location : FCU 4 Admin Office  
Type : Wall Mounted Split Type 3.0HP- Kolin  
Pipe Length : 49 Ft.  
Wire Length : 56 Ft.

Initial Charge :

: Included

10 Ft. Copper Pipe 1/4x5/8  
10 Ft. ThnnWire 2.0mm2x4c  
Labor and other consumables

Php 7,700.00

: Excess

39 Ft. Copper Pipe 1/4x5/8 400 /Ft. Php 15,600.00  
46 Ft. ThnnWire 2.0mm2x4c 100 /Ft. Php 4,600.00  
7 Ft. ThnnWire 3.5mm2x2c 60 /Ft. Php 420.00  
1 Pc. Circuit Breaker 30 Amp 1000 /Pc. Php 1,000.00  
Fabricated Bracket ( c/o Customer )

Php 21,620.00

FCU4 Installation Cost:

Php 29,320.00

Location : FCU 5 Admin Office  
Type : Floor Mounted 6.0HP- Kolin  
Pipe Length : 40 Ft.  
Wire Length : 47 Ft.

Initial Charge :

: Included

10 Ft. Copper Pipe 3/8x5/8  
10 Ft. ThnnWire 2.0mm2x4c  
Labor and other consumables

Php 13,200.00

: Excess

30 Ft. Copper Pipe 3/8x5/8 400 /Ft. Php 12,000.00  
37 Ft. ThnnWire 2.0mm2x4c 100 /Ft. Php 3,700.00  
7 Ft. ThnnWire 5.5mm2x2c 70 /Ft. Php 490.00  
1 Pc. Circuit Breaker 60 Amp 1000 /Pc. Php 1,000.00  
Fabricated Bracket ( c/o Customer )

Php 17,190.00

FCU5 Installation Cost:

Php 30,390.00

Location : FCU 6 Pantry  
Type : Wall Mounted Split Type 1.5HP- Kolin  
Pipe Length : 15 Ft.  
Wire Length : 22 Ft.

Initial Charge :

: Included

10 Ft. Copper Pipe 3/8x1/4  
10 Ft. ThnnWire 2.0mm2x4c  
Labor and other consumables

Php 6,700.00

: Excess

5 Ft. Copper Pipe 1/4x3/8 350 /Ft. Php 1,750.00  
12 Ft. ThnnWire 2.0mm2x4c 100 /Ft. Php 1,200.00  
7 Ft. ThnnWire 3.5mm2x2c 70 /Ft. Php 490.00  
1 Pc. Circuit Breaker 20 Amp 1000 /Pc. Php 1,000.00  
Fabricated Bracket ( c/o Customer )

Php 4,440.00

FCU6 Installation Cost:

Php 11,140.00

Total Project Installation Cost :

Php 129,610.00

Vat Included

## II. VALIDITY DATE:

Quotation - Thirty (30) days only.

## III. TERMS OF PAYMENT:

50% Down Payment

50% Full Payment Upon Completion

Note: 1. Aging of the payment is based on the billing statement date.

2. Price is subject to change without prior notice.

3. Bank transfer/ cash or dated check (subject for clearing).

## IV. BANK DETAILS:

Chinabanking Corporation  
Account Name: Kengie Electro Mechanical Services  
Account Number: 112400002269


## V. WARRANTY:

One (1) Year parts of airconditioner

One (1) Year labor and installation materials of airconditioner

## VI. REMARKS:

1. Mansory, carpentry, chipping and plastering (Finishing or retouch) are not included in the scope of works.
2. Electrical power supply (Feeder line) are not included in the scope of works.
3. Aircon drain line will be tepped to the nearest drain line provision/ downspout pipe.

  
Mirriam Asis  
Service Coordinator Head

For:

  
MIRRIAM ASIS  
Service Coordinator  
Kenneth C. Siubal  
General Manager

  
Queenie Cantillon  
Service Coordinator Staff