

MJRC AIRCONDITIONING SERVICES

#124 V.Luna Extn. Brgy.Sikatuna Village Quezon City
2453114 / 09062456002 / 09272733186
Email Add: mjrc.airconditioning@gmail.com

QUOTATION

August 27,2025

Kate Gomez

#62 Karuhatan Rd Karuhatan Village
Valenzuela City

Please see the below prices for your reference

QTY	DESCRIPTION	UNIT PRICE	AMOUNT
6	Container Room For Installation of window type Kolin 1.5hp Installation charge	1,200.00	7,200.00
		TOTAL	7,200.00

NOTATION:

AC bracket c/o customer.

THANK YOU FOR YOUR BUSINESS

Phoebe Masuba

Prepared by

Conformme

MJRC AIRCONDITIONING SERVICES

Customer Name : ANTONIO SALAZAR / KATE GOMEZ Date :
 Address : #62 KARUHATAN RD KARUHATAN VILLAGE VALENZUELA CITY SJR No : H0-00269728
 Establishment Type: Residential ☐ Commercial ☒
 Area Surveyed : ADMIN 1

Cooling Capacity Computation

Floor Area : 56 sqm.
 Ceiling Height : 2.7 mtr.

note: add 20% per meter in excess of 3 meters in the
 initial cooling capacity computed.


Floor Area :	<u>56.00</u>	x	550 Btu/hr	<u>30800</u>	3tu/h
Ceiling Height (excess of 3 mtrs.) :		x	20%		Btu/h
Windows Direct Sunlight		☐	20% Heat Load of Floor Area	<u>6160</u>	3tu/h
Glass Wall Direct Sunlight		☐	50% Heat Load of Floor Area		Btu/h
Total Cooling Capacity				<u>36960</u>	3tu/h
Add : Additional Heal Load					
No. of Person	<u>7</u>	x	300 Btu/hr	<u>2100</u>	3tu/h
No. of Ordinary Light (<40w)	<u>10</u>	x	200 Btu/hr	<u>2000</u>	3tu/h
No. of Special Light (<40w)		x	400 Btu/hr		Btu/h
No. of Refrigerator (<6 cu.ft.)		x	400 Btu/hr		Btu/h
No. of Refrigerator (<6 cu.ft.)		x	800 Btu/hr		Btu/h
No. of Television		x	400 Btu/hr		Btu/h
No. of Cooking Range		x	1500 Btu/hr		Btu/h
No. of Laptop Computer		x	250 Btu/hr		Btu/h
No. of Desktop Computer	<u>7</u>	x	500 Btu/hr	<u>3500</u>	3tu/h
No. of Printer		x	500 Btu/hr		Btu/h
No. of Photocopier		x	1000 Btu/hr		Btu/h
Total Cooling Capacity				<u>44560</u>	3tu/h
Computed Cooling Capacity	KL-IF60-G6H1M32 - customer's choice			<u>4.95</u>	HP
Recommended Product Model				Recommended Capacity / Type	<u>4HP</u>

Note : Compressor warranty will be reduced to yr. If air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.

Scope of Agreement

- | | | |
|--|--|--|
| 1. Copper tube lay-out | ☐ Expose | ☒ Embedded |
| 2. Chipping | ☒ Included | ☐ Not Included |
| 3. Fabricated bracket | ☐ Yes | ☒ No |
| 4. Service Ledge | ☐ Yes | ☒ No |
| 5. Dismantling of existing Aircon | ☐ Included | ☐ c/o Customer |
| 6. Leak Test of existing Copper tube | ☐ Yes | ☒ No |
| 7. Duct works | ☐ Yes | ☒ No |
| 8. Location of indoor and outdoor units were agreed by the customer and surveyor. | | |
| 9. Plastering, Carpentry and restoration works are to be done by the customer. | | |
| 10. Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer. | | |
| 11. Processing of mechanical plan, working permit are to be done by the customer. | | |
| 12. Other concern; <u>RECOMMENDED UNIT WAS 4.0HP BUT CUSTOMER REQUESTING FOR 6.0HP</u> | | |

Plan Lay-out

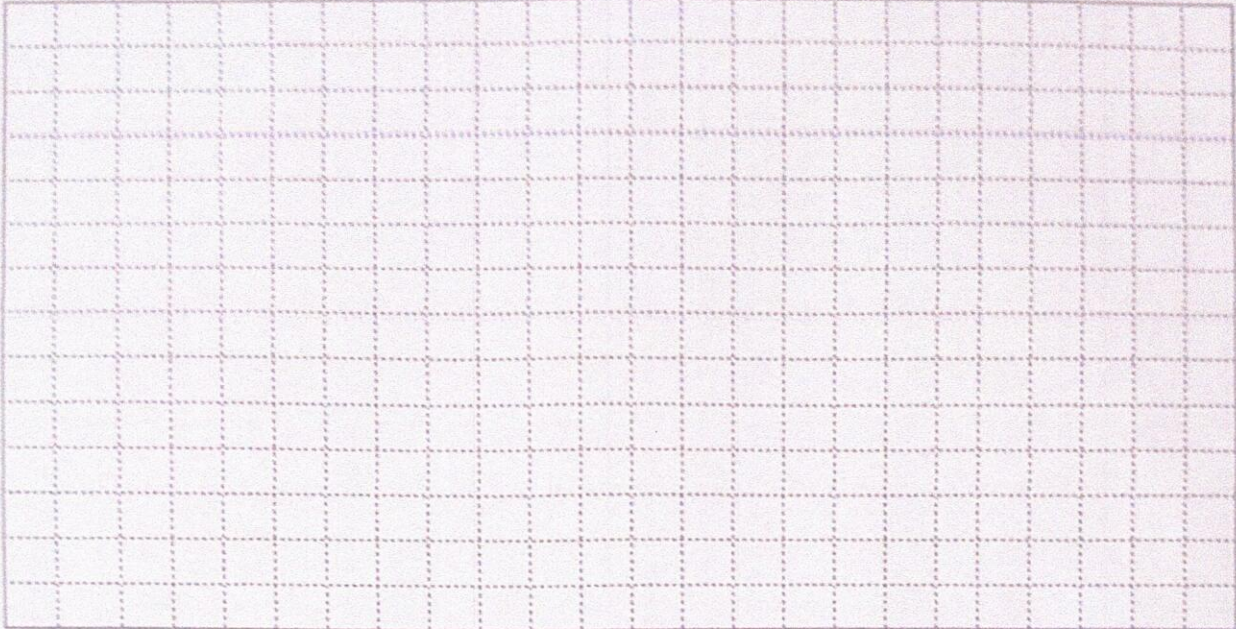

Indoor Unit Location : _____ INFRONT OF THE ROOM _____
 Outdoor Unit Location : _____
 Pipe Length : _____ 12.5 METERS _____
 Special Note : _____

Instruction: ☐ Encircle required specifications (copper tube size, power supply, circuit breaker and ODU bracket)

Installation Cost Estimate

Material Description	Qty.	Unit Cost	Total Cost
Insu. Copper Tube (Excess of 10ft.) 3/8" x 1/4" 1/2" x 1/4" 5/8" x 1/4" <u>5/8" x 3/8"</u> 7/8" x 3/8"	31	P 400.00	P 12,400.00
Communication Wire - Royal Cord (Excess 10ft.) 2.0sqmm x 4c	36	P 100.00	P 3,600.00
Power Supply - Royal Cord (Breaker to ODU) 3.5sqmm x 3c 5.5sqmm x 3c 8.0sqmm x 3c			P
Circuit Breaker 20Amps/1Ph 30Amps/1Ph <u>40Amps/Ph</u> 60Amps/1Ph 40Amps/3Ph 100Amps/3Ph	1	1000	P 1,000.00
Bracket (ODU) <u>Kolin Wall</u> Kolin Floor Fab. Floor Fab. Wall Fab. Wall w/ ledge			P
Angel Bracket (WAC)			P
PVC Pipe (Drain) 3/4" x 10' 1" x 10'			P
Leaktest Existing Copper Tube (Ø dia _____ x _____ estimated length _____ ft)			P
Dismantling Fee (Existing Air-Conditioning unit capacity _____ HP)			P
Chipping Works	8M	500	P 4,000.00
Others _____			
Initial Charge			P 11,000.00
TOTAL ESTIMATE			P 32,000.00

Note:

1. Final charges will be based on actual installation.
2. Survey fee will be deducted in the installation fee.

Prepared by

ROMEL G. MASUBA

Signature Over Printed Name

Customer Conforme:

Signature Over Printed Name

MJRC AIRCONDITIONING SERVICES

Customer Name : ANTONIO SALAZAR Date : AUGUST 18, 2025
 Address : #62 KARUHATAN RD KARUHATAN VILLAGE VALENZUELA CITY SJR No : _____
 Establishment Type: Residential ☐ Commercial ☒
 Area Surveyed : ADMIN (2)

Cooling Capacity Computation

Floor Area : 56 sqm.
 Ceiling Height : 2.7 mtr.

note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed.

Floor Area :	<u>56.00</u>	x	550 Btu/hr	<u>30800</u> Btu/h
Ceiling Height (excess of 3 mtrs.) :		x	20%	<u> </u> Btu/h
Windows Direct Sunlight		☐	20% Heat Load of Floor Area	<u>6160</u> Btu/h
Glass Wall Direct Sunlight		☐	50% Heat Load of Floor Area	<u> </u> Btu/h
Total Cooling Capacity				<u>36960</u> Btu/h
Add : Additional Heal Load				
No. of Person	<u>7</u>	x	300 Btu/hr	<u>2100</u> Btu/h
No. of Ordinary Light (<40w)	<u>10</u>	x	200 Btu/hr	<u>2000</u> Btu/h
No. of Special Light (<40w)	<u>0</u>	x	400 Btu/hr	<u> </u> Btu/h
No. of Refrigerator (<6 cu.ft.)		x	400 Btu/hr	<u> </u> Btu/h
No. of Refrigerator (<6 cu.ft.)		x	800 Btu/hr	<u> </u> Btu/h
No. of Television		x	400 Btu/hr	<u> </u> Btu/h
No. of Cooking Range		x	1500 Btu/hr	<u> </u> Btu/h
No. of Laptop Computer		x	250 Btu/hr	<u> </u> Btu/h
No. of Desktop Computer	<u>7</u>	x	500 Btu/hr	<u>3500</u> Btu/h
No. of Printer		x	500 Btu/hr	<u> </u> Btu/h
No. of Photocopier		x	1000 Btu/hr	<u> </u> Btu/h
Total Cooling Capacity				<u>44560</u> Btu/h
Computed Cooling Capacity				<u>4.95</u> HP


Recommended Product Model KSG-IWF-30WFY-8K1M32 Recommended Capacity / Type WALL MOUNTED

Note : Compressor warranty will be reduced to _____yr. If air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.

Scope of Agreement

- | | | |
|--------------------------------------|--|--|
| 1. Copper tube lay-out | ☐ Expose | ☒ Embedded |
| 2. Chipping | ☒ Included | ☐ Not Included |
| 3. Fabricated bracket | ☐ Yes | ☒ No |
| 4. Service Ledge | ☐ Yes | ☒ No |
| 5. Dismantling of existing Aircon | ☐ Included | ☐ c/o Customer |
| 6. Leak Test of existing Copper tube | ☐ Yes | ☒ No |
| 7. Duct works | ☐ Yes | ☒ No |
8. Location of indoor and outdoor units were agreed by the customer and surveyor.
 9. Plastering, Carpentry and restoration works are to be done by the customer.
 10. Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
 11. Processing of mechanical plan, working permit are to be done by the customer.
 12. Other concern: WITH CHIPPING 5M / DRAINAGE C/O CUSTOMER

Plan Lay-out

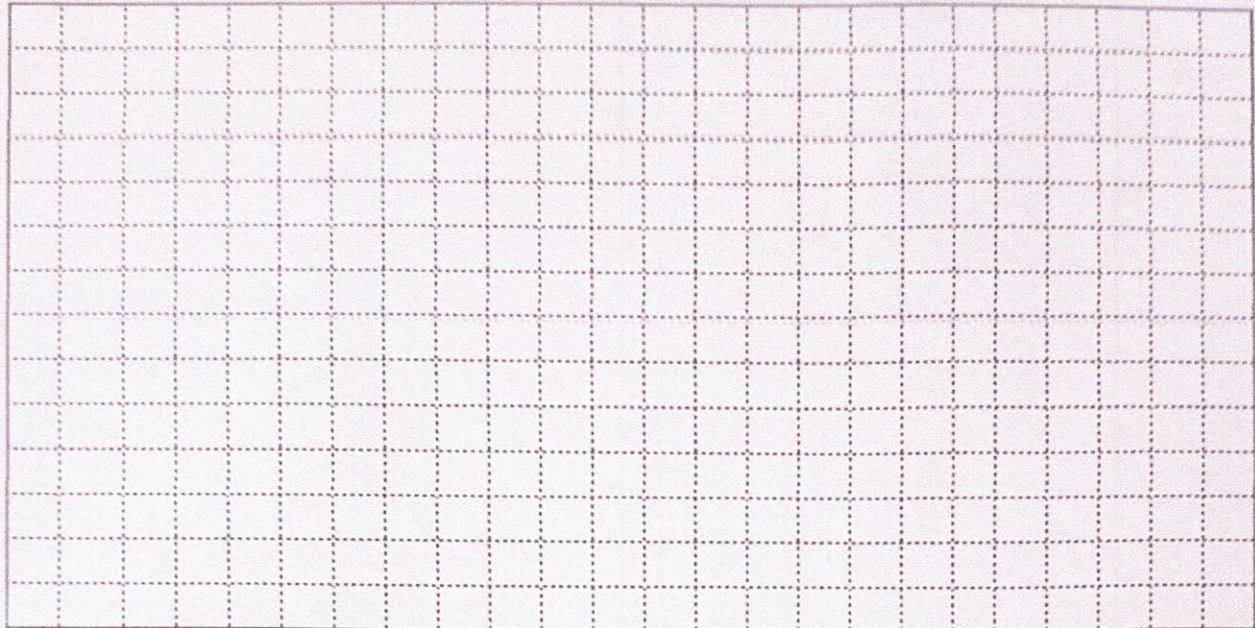

Indoor Unit Location : LEFT SIDE AT THE BACK OF THE ROOM

Outdoor Unit Location : _____

Pipe Length : 14 METERS

Special Note : _____

Instruction: ☐ Encircle required specifications (copper tube size, power supply, circuit breaker and ODU bracket)

Installation Cost Estimate

Material Description	Qty.	Unit Cost	Total Cost
Insu. Copper Tube (Excess of 10ft.) 3/8" x 1/4" 1/2" x 1/4" <u>5/8" x 1/4"</u> 5/8" x 3/8" 7/8" x 3/8"	36	P 400.00	P 14,400.00
Communication Wire - Royal Cord (Excess 10ft.) 2.0sqmm x 4c	41	P 100.00	P 4,100.00
Power Supply - Royal Cord (Breaker to ODU) 3.5sqmm x 3c 5.5sqmm x 3c 8.0sqmm x 3c			P
Circuit Breaker 20Amps/1Ph <u>30Amps/1Ph</u> 40Amps/Ph 60Amps/1Ph 40Amps/3Ph 100Amps/3Ph	1	1000	P 1,000.00
Bracket (ODU) <u>Kolin Wall</u> Kolin Floor Fab. Floor Fab. Wall Fab. Wall w/ ledge			P
Angel Bracket (WAC)			P
PVC Pipe (Drain) 3/4" x 10' 1' x 10'			P
Leaktest Existing Copper Tube (Ø dia ____ x ____, estimated length ____ ft)			P
Dismantling Fee (Existing Air-Conditioning unit capacity ____ HP)			P
Chipping Works	5m	500	P 2,500.00
Others _____			
Initial Charge			P 8,500.00
TOTAL ESTIMATE			P 30,500.00

Note:

1. Final charges will be based on actual installation.
2. Survey fee will be deducted in the installation fee.

Prepared by:

ROMEL MASUBA

Signature Over Printed Name

Customer Conforme:

Signature Over Printed Name

MJRC AIRCONDITIONING SERVICES

Customer Name : ANTONIO SALAZAR Date : AUGUST 18,2025
 Address : #62 KARUHATAN RD KARUHATAN VILLAGE VALENZUELA CITY SJR No : _____
 Establishment Type: Residential ☐ Commercial ☒
 Area Surveyed : ADMIN (3)

Cooling Capacity Computation

Floor Area : 56 sqm.
 Ceiling Height : 2.7 mtr.

note: add 20% per meter in excess of 3 meters in the
 initial cooling capacity computed.

Floor Area :	<u>54.00</u>	x	550 Btu/hr	<u>30800</u> Btu/h
Ceiling Height (excess of 3 mtrs.) :		x	20%	<u> </u> Btu/h
Windows Direct Sunlight		☐	20% Heat Load of Floor Area	<u>6160</u> Btu/h
Glass Wall Direct Sunlight	<u>N/A</u>	☐	50% Heat Load of Floor Area	<u> </u> Btu/h
Total Cooling Capacity				<u>36960</u> Btu/h
Add : Additional Heal Load				
No. of Person	<u>7</u>	x	300 Btu/hr	<u>2100</u> Btu/h
No. of Ordinary Light (<40w)	<u>10</u>	x	200 Btu/hr	<u>2000</u> Btu/h
No. of Special Light (<40w)		x	400 Btu/hr	<u> </u> Btu/h
No. of Refrigerator (<6 cu.ft.)		x	400 Btu/hr	<u> </u> Btu/h
No. of Refrigerator (<6 cu.ft.)		x	800 Btu/hr	<u> </u> Btu/h
No. of Television		x	400 Btu/hr	<u> </u> Btu/h
No. of Cooking Range		x	1500 Btu/hr	<u> </u> Btu/h
No. of Laptop Computer		x	250 Btu/hr	<u> </u> Btu/h
No. of Desktop Computer	<u>7</u>	x	500 Btu/hr	<u>3500</u> Btu/h
No. of Printer		x	500 Btu/hr	<u> </u> Btu/h
No. of Photocopier		x	1000 Btu/hr	<u> </u> Btu/h
Total Cooling Capacity				<u>44560</u> Btu/h
Computed Cooling Capacity				<u>4.95</u> HP


Recommended Product Model KSG-IWF-30WFY-8K1M32 Recommended Capacity / Type WALL MOUNTED

Note : Compressor warranty will be reduced to _____yr. If air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.

Scope of Agreement

- Copper tube lay-out ☐ Expose ☒ Embedded
- Chipping ☒ Included ☐ Not Included
- Fabricated bracket ☐ Yes ☒ No
- Service Ledge ☐ Yes ☒ No
- Dismantling of existing Aircon ☐ Included ☐ c/o Customer
- Leak Test of existing Copper tube ☐ Yes ☒ No
- Duct works ☐ Yes ☒ No
- Location of indoor and outdoor units were agreed by the customer and surveyor.
- Plastering, Carpentry and restoration works are to be done by the customer.
- Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
- Processing of mechanical plan, working permit are to be done by the customer.
- Other concern; WITH CHIPPING 5M / DRAINAGE C/O CUSTOMER

Plan Lay-out

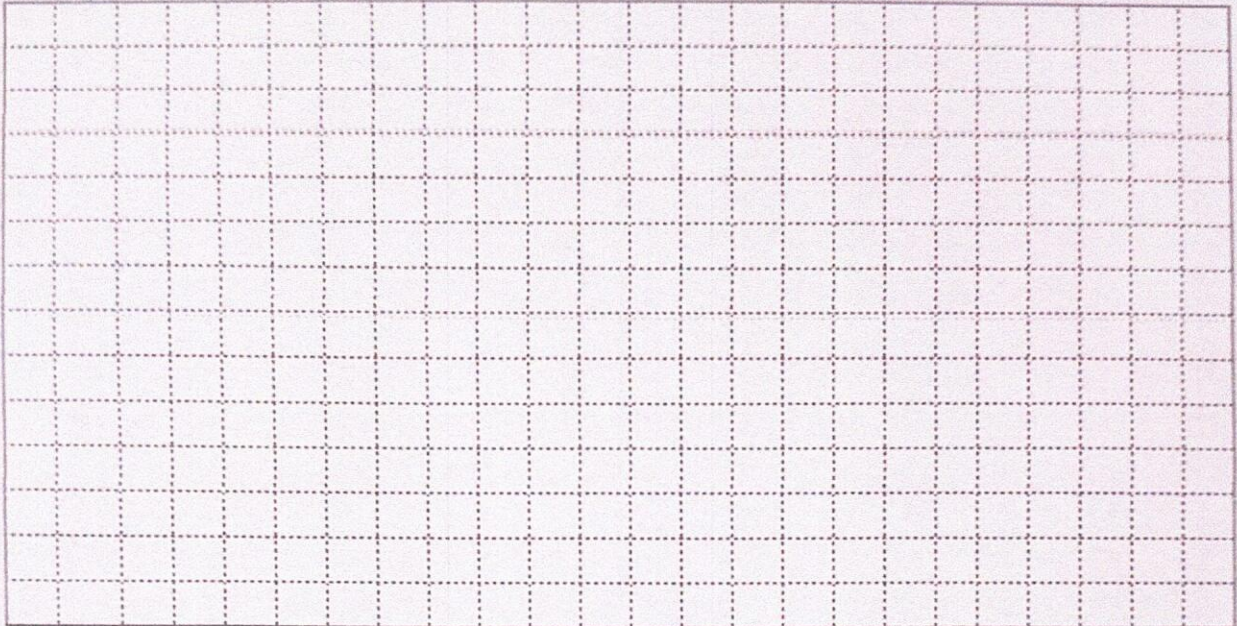

Indoor Unit Location : RIGHT SIDE AT THE BACK OF THE ROOM

Outdoor Unit Location : AT THE BACK OF CONFERENCE ROOM

Pipe Length : 9 METERS

Special Note : _____

Instruction: ☐ Encircle required specifications (copper tube size, power supply, circuit breaker and ODU bracket)

Installation Cost Estimate

Material Description	Qty.	Unit Cost	Total Cost
Insu. Copper Tube (Excess of 10ft.) <u>3/8" x 1/4" 1/2" x 1/4" 5/8" x 1/4" 5/8" x 3/8" 7/8" x 3/8"</u>	20	₱ 400.00	₱ 8,000.00
Communication Wire - Royal Cord (Excess 10ft.) 2.0sqmm x 4c	25	₱ 100.00	₱ 2,500.00
Power Supply - Royal Cord (Breaker to ODU) 3.5sqmm x 3c 5.5sqmm x 3c 8.0sqmm x 3c			₱
Circuit Breaker 20Amps/1Ph <u>30Amps/1Ph</u> 40Amps/Ph 60Amps/1Ph 40Amps/3Ph 100Amps/3Ph	1	1000	₱ 1,000.00
Bracket (ODU) <u>Kolin Wall</u> Kolin Floor Fab. Floor Fab. Wall Fab. Wall w/ ledge			₱
Angel Bracket (WAC)			₱
PVC Pipe (Drain) 3/4" x 10' 1" x 10'			₱
Leaktest Existing Copper Tube (ø dia ____ x ____, estimated length ____ ft)			₱
Dismantling Fee (Existing Air-Conditioning unit capacity ____ HP)			₱
Chipping Works	5m	500	₱ 2,500.00
Others _____			
Initial Charge			₱ 8,500.00
TOTAL ESTIMATE			₱ 22,500.00

Note:

1. Final charges will be based on actual installation.
2. Survey fee will be deducted in the installation fee.

Prepared by:

ROMEL MAFUZA
Signature Over Printed Name

Customer Conforms:

Signature Over Printed Name

MJRC AIRCONDITIONING SERVICES

Customer Name : ANTONIO SALAZAR Date : AUGUST 18,2025
 Address : #62 KARUHATAN RD KARUHATAN VILLAGE VALENZUELA CITY SJR No : _____
 Establishment Type: Residential ☐ Commercial ☒
 Area Surveyed : CONFERENCE ROOM

Cooling Capacity Computation

Floor Area : 18 sqm.
 Ceiling Height : 2.7 mtr.

note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed.

Floor Area :	<u>18.00</u>	x	550 Btu/hr	<u>9900</u> Btu/h
Ceiling Height (excess of 3 mtrs.) :		x	20%	<u>800</u> Btu/h
Windows Direct Sunlight		☐	20% Heat Load of Floor Area	<u>1100</u> Btu/h
Glass Wall Direct Sunlight		☐	50% Heat Load of Floor Area	<u>800</u> Btu/h
Total Cooling Capacity				<u>11000</u> Btu/h

Add : Additional Heal Load

No. of Person	<u>10</u>	x	300 Btu/hr	<u>3000</u> Btu/h
No. of Ordinary Light (<40w)	<u>4</u>	x	200 Btu/hr	<u>800</u> Btu/h
No. of Special Light (<40w)	<u>1</u>	x	400 Btu/hr	<u>400</u> Btu/h
No. of Refrigerator (<6 cu.ft.)	<u>1</u>	x	400 Btu/hr	<u>400</u> Btu/h
No. of Refrigerator (<6 cu.ft.)		x	800 Btu/hr	<u>800</u> Btu/h
No. of Television	<u>1</u>	x	400 Btu/hr	<u>400</u> Btu/h
No. of Cooking Range		x	1500 Btu/hr	<u>1500</u> Btu/h
No. of Laptop Computer	<u>1</u>	x	250 Btu/hr	<u>250</u> Btu/h
No. of Desktop Computer		x	500 Btu/hr	<u>500</u> Btu/h
No. of Printer		x	500 Btu/hr	<u>500</u> Btu/h
No. of Photocopier		x	1000 Btu/hr	<u>1000</u> Btu/h
Total Cooling Capacity				<u>16250</u> Btu/h

Computed Cooling Capacity


Recommended Product Model KSM-IW20-WCT10M1M32 Recommended Capacity / Type WALL MOUNTED

Note : Compressor warranty will be reduced to _____yr. If air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.

Scope of Agreement

- | | | |
|--------------------------------------|--|--|
| 1. Copper tube lay-out | ☐ Expose | ☒ Embedded |
| 2. Chipping | ☒ Included | ☐ Not Included |
| 3. Fabricated bracket | ☐ Yes | ☒ No |
| 4. Service Ledge | ☐ Yes | ☒ No |
| 5. Dismantling of existing Aircon | ☐ Included | ☐ c/o Customer |
| 6. Leak Test of existing Copper tube | ☐ Yes | ☒ No |
| 7. Duct works | ☐ Yes | ☒ No |
8. Location of indoor and outdoor units were agreed by the customer and surveyor.
 9. Plastering, Carpentry and restoration works are to be done by the customer.
 10. Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
 11. Processing of mechanical plan, working permit are to be done by the customer.
 12. Other concern; WITH CHIPPING 5M / DRAINAGE C/O CUSTOMER

Plan Lay-out

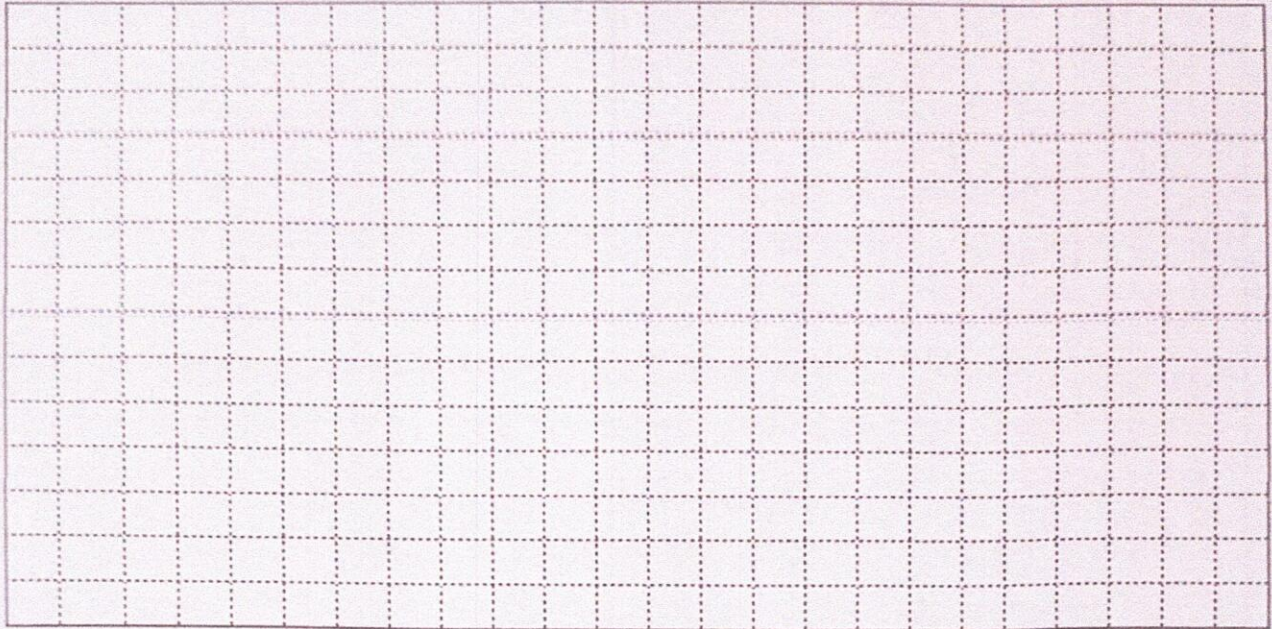

Indoor Unit Location : _____ RIGHT SIDE OF THE ROOM / AT THE MIDDLE OF THE WALL _____
 Outdoor Unit Location : _____
 Pipe Length : _____ 7 METERS _____
 Special Note : _____

Instruction: ○ Encircle required specifications (copper tube size, power supply, circuit breaker and ODU bracket)

Installation Cost Estimate

Material Description	Qty.	Unit Cost	Total Cost
Insu. Copper Tube (Excess of 10ft.) 3/8" x 1/4" <u>1/2" x 1/4"</u> 5/8" x 1/4" 5/8" x 3/8" 7/8" x 3/8"	13	₱ 350.00	₱ 4,550.00
Communication Wire - Royal Cord (Excess 10ft.) 2.0sqmm x 4c	18	₱ 100.00	₱ 1,800.00
Power Supply - Royal Cord (Breaker to ODU) 3.5sqmm x 3c 5.5sqmm x 3c 8.0sqmm x 3c			₱
Circuit Breaker 20Amps/1Ph <u>30Amps/1Ph</u> 40Amps/Ph 60Amps/1Ph 40Amps/3Ph 100Amps/3Ph	1	1000	₱ 1,000.00
Bracket (ODU) <u>Kolin Wall</u> Kolin Floor Fab. Floor Fab. Wall Fab. Wall w/ ledge			₱
Angel Bracket (WAC)			₱
PVC Pipe (Drain) 3/4" x 10' 1" x 10'			₱
Leaktest Existing Copper Tube (Ø dia ____ x ____, estimated length ____ ft)			₱
Dismantling Fee (Existing Air-Conditioning unit capacity ____ HP)			₱
Chipping Works	5m	200	₱ 2,500.00
Others _____			
Initial Charge			₱ 8,500.00
TOTAL ESTIMATE			₱ 18,350.00

Note:

1. Final charges will be based on actual installation.
2. Survey fee will be deducted in the installation fee.

Prepared by:

ROMEL G. MASUBA

Signature Over Printed Name

Customer Conforms:

Signature Over Printed Name

MJRC AIRCONDITIONING SERVICES

Customer Name : ANTONIO SALAZAR Date : AUGUST 18, 2025

Address : #62 KARUHATAN RD KARUHATAN VILLAGE VALENZUELA CITY SJR No : _____

Establishment Type: Residential ☐ Commercial ☒

Area Surveyed : MANAGER'S ROOM

Cooling Capacity Computation

Floor Area : 18 sqm.

Ceiling Height : 2.7 mtr.

note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed.

Floor Area :	<u>18.00</u>	x	550 Btu/hr	<u>9900</u> Btu/h
Ceiling Height (excess of 3 mtrs.) :		x	20%	<u> </u> Btu/h
Windows Direct Sunlight		☐	20% Heat Load of Floor Area	<u> </u> Btu/h
Glass Wall Direct Sunlight		☐	50% Heat Load of Floor Area	<u> </u> Btu/h
Total Cooling Capacity				<u>9900</u> Btu/h

Add : Additional Heal Load

No. of Person	<u>3</u>	x	300 Btu/hr	<u>900</u> Btu/h
No. of Ordinary Light (<40w)	<u>4</u>	x	200 Btu/hr	<u>800</u> Btu/h
No. of Special Light (<40w)	<u>1</u>	x	400 Btu/hr	<u>400</u> Btu/h
No. of Refrigerator (<6 cu.ft.)		x	400 Btu/hr	<u> </u> Btu/h
No. of Refrigerator (<6 cu.ft.)		x	800 Btu/hr	<u> </u> Btu/h
No. of Television		x	400 Btu/hr	<u> </u> Btu/h
No. of Cooking Range		x	1500 Btu/hr	<u> </u> Btu/h
No. of Laptop Computer		x	250 Btu/hr	<u> </u> Btu/h
No. of Desktop Computer	<u>1</u>	x	500 Btu/hr	<u>500</u> Btu/h
No. of Printer		x	500 Btu/hr	<u> </u> Btu/h
No. of Photocopier		x	1000 Btu/hr	<u> </u> Btu/h
Total Cooling Capacity				<u>12500</u> Btu/h

Computed Cooling Capacity

CUSTOMER'S CHOICE 2-DHP

Recommended Product Model

KSM-IW20-WCT10M1M32

Recommended Capacity / Type


WALL MOUNTED

Note : Compressor warranty will be reduced to _____yr. If air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.

Scope of Agreement

- | | | |
|--------------------------------------|--|--|
| 1. Copper tube lay-out | ☐ Expose | ☒ Embedded |
| 2. Chipping | ☒ Included | ☐ Not Included |
| 3. Fabricated bracket | ☐ Yes | ☒ No |
| 4. Service Ledge | ☐ Yes | ☒ No |
| 5. Dismantling of existing Aircon | ☐ Included | ☒ C/o Customer |
| 6. Leak Test of existing Copper tube | ☐ Yes | ☒ No |
| 7. Duct works | ☐ Yes | ☒ No |
8. Location of indoor and outdoor units were agreed by the customer and surveyor.
9. Plastering, Carpentry and restoration works are to be done by the customer.
10. Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
11. Processing of mechanical plan, working permit are to be done by the customer.
12. Other concern; WITH CHIPPING 5M / DRAINAGE C/O CUSTOMER

Plan Lay-out

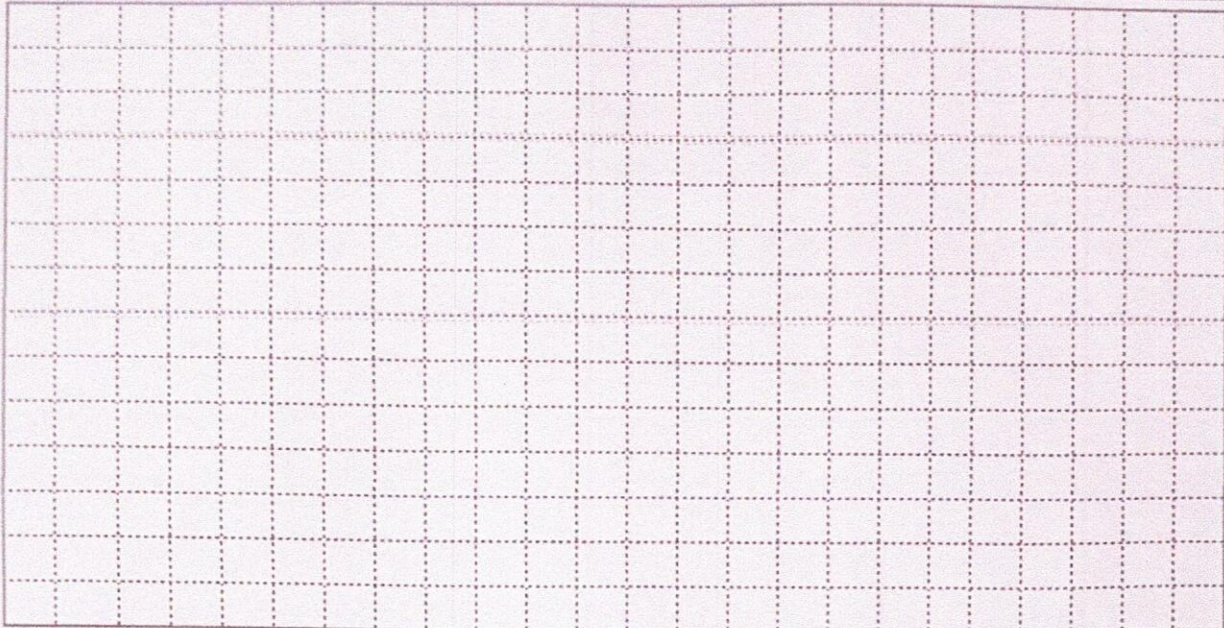

Indoor Unit Location : LEFT SIDE OF THE ROOM

Outdoor Unit Location : _____

Pipe Length : 15 METERS

Special Note : _____

Instruction: ☐ Encircle required specifications (copper tube size, power supply, circuit breaker and ODU bracket)


Installation Cost Estimate

Material Description	Qty.	Unit Cost	Total Cost
Insu. Copper Tube (Excess of 10ft.) <u>3/8" x 1/4"</u> <u>1/2" x 1/4"</u> 5/8" x 1/4" 5/8" x 3/8" 7/8" x 3/8"	40	₱ 350.00	₱ 14,000.00
Communication Wire - Royal Cord (Excess 10ft.) 2.0sqmm x 4c	45	₱ 100.00	₱ 4,500.00
Power Supply - Royal Cord (Breaker to ODU) 3.5sqmm x 3c 5.5sqmm x 3c 8.0sqmm x 3c			₱
Circuit Breaker 20Amps/1Ph <u>30Amps/1Ph</u> 40Amps/Ph 60Amps/1Ph 40Amps/3Ph 100Amps/3Ph	1	1000	₱ 1,000.00
Bracket (ODU) <u>Kolin Wall</u> Kolin Floor Fab. Floor Fab. Wall Fab. Wall w/ ledge			₱
Angel Bracket (WAC)			₱
PVC Pipe (Drain) 3/4" x 10' 1" x 10'			₱
Leaktest Existing Copper Tube (Ø dia ____ x ____, estimated length ____ ft)			₱
Dismantling Fee (Existing Air-Conditioning unit capacity ____ HP)			₱
Chipping Works	5m	500	₱ 2,500.00
Others _____			
Initial Charge			₱ 7,500.00
TOTAL ESTIMATE			₱ 29,500.00

Note:

1. Final charges will be based on actual installation.
2. Survey fee will be deducted in the installation fee.

Prepared by:


 Signature Over Printed Name

Customer Conforme:

 Signature Over Printed Name

MJRC AIRCONDITIONING SERVICES

Customer Name : ANTONIO SALAZAR Date : AUGUST 18, 2025
 Address : #62 KARUHATAN RD KARUHATAN VILLAGE VALENZUELA CITY SJR No : _____
 Establishment Type: Residential ☐ Commercial ☒
 Area Surveyed : PANTRY

Cooling Capacity Computation

Floor Area : 10 sqm.
 Ceiling Height : 2.7 mtr.

note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed.

Floor Area :	<u>10.00</u>	x	550 Btu/hr	<u>5500</u> Btu/h
Ceiling Height (excess of 3 mtrs.) :		x	20%	<u> </u> Btu/h
Windows Direct Sunlight		☐	20% Heat Load of Floor Area	<u> </u> Btu/h
Glass Wall Direct Sunlight		☐	50% Heat Load of Floor Area	<u> </u> Btu/h
Total Cooling Capacity				<u>5500</u> Btu/h
Add : Additional Heal Load				
No. of Person	<u>4</u>	x	300 Btu/hr	<u>1200</u> Btu/h
No. of Ordinary Light (<40w)	<u>4</u>	x	200 Btu/hr	<u>800</u> Btu/h
No. of Special Light (<40w)		x	400 Btu/hr	<u> </u> Btu/h
No. of Refrigerator (<6 cu.ft.)	<u>1</u>	x	400 Btu/hr	<u>400</u> Btu/h
No. of Refrigerator (<6 cu.ft.)		x	800 Btu/hr	<u> </u> Btu/h
No. of Television	<u>1</u>	x	400 Btu/hr	<u>400</u> Btu/h
No. of Cooking Range		x	1500 Btu/hr	<u> </u> Btu/h
No. of Laptop Computer		x	250 Btu/hr	<u> </u> Btu/h
No. of Desktop Computer		x	500 Btu/hr	<u> </u> Btu/h
No. of Printer		x	500 Btu/hr	<u> </u> Btu/h
No. of Photocopier		x	1000 Btu/hr	<u> </u> Btu/h
Total Cooling Capacity				<u>8200</u> Btu/h
Computed Cooling Capacity				<u>0.9</u> HP

Recommended Product Model

CUSTOMER'S CHOICE 1-5HP

KSM-IW15-WCT10M1M32

Recommended Capacity / Type

WALL MOUNTED


Note : Compressor warranty will be reduced to _____ yr. If air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.

Scope of Agreement

- | | | |
|--------------------------------------|--|--|
| 1. Copper tube lay-out | ☐ Expose | ☒ Embedded |
| 2. Chipping | ☒ Included | ☐ Not Included |
| 3. Fabricated bracket | ☐ Yes | ☒ No |
| 4. Service Ledge | ☐ Yes | ☒ No |
| 5. Dismantling of existing Aircon | ☐ Included | ☐ c/o Customer |
| 6. Leak Test of existing Copper tube | ☐ Yes | ☒ No |
| 7. Duct works | ☐ Yes | ☒ No |
8. Location of indoor and outdoor units were agreed by the customer and surveyor.
 9. Plastering, Carpentry and restoration works are to be done by the customer.
 10. Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
 11. Processing of mechanical plan, working permit are to be done by the customer.

12. Other concern; WITH CHIPPING 5M / DRAINAGE C/O CUSTOMER

Plan Lay-out

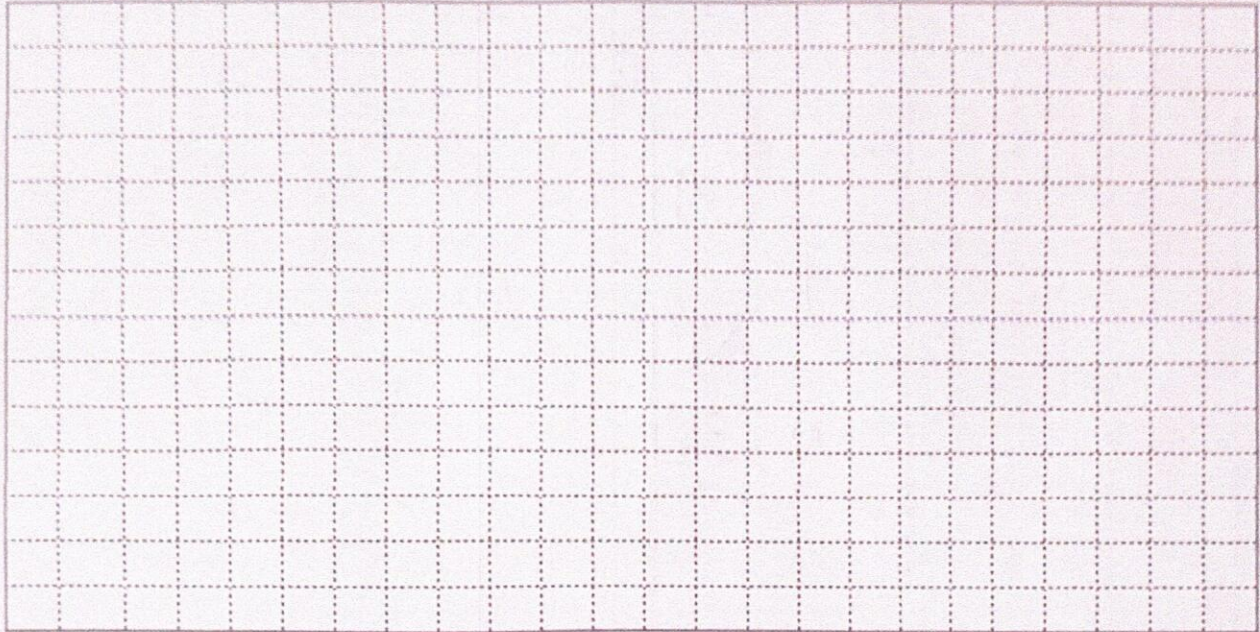

Indoor Unit Location : LEFT SIDE OF THE ROOM

Outdoor Unit Location : _____

Pipe Length : 5 METERS

Special Note : _____

Instruction: ○ Encircle required specifications (copper tube size, power supply, circuit breaker and ODU bracket)

Installation Cost Estimate

Material Description	Qty.	Unit Cost	Total Cost
Insu. Copper Tube (Excess of 10ft.) 3/8" x 1/4" <u>1/2" x 1/4"</u> 5/8" x 1/4" 5/8" x 3/8" 7/8" x 3/8"	20	P 350.00	P 7,000.00
Communication Wire - Royal Cord (Excess 10ft.) 2.0sqmm x 4c	25	P 100.00	P 2,500.00
Power Supply - Royal Cord (Breaker to ODU) 3.5sqmm x 3c 5.5sqmm x 3c 8.0sqmm x 3c			P
Circuit Breaker <u>20Amps/1Ph</u> 30Amps/1Ph 40Amps/Ph 60Amps/1Ph 40Amps/3Ph 100Amps/3Ph	1	1000	P 1,000.00
Bracket (ODU) <u>Kolin Wall</u> Kolin Floor Fab. Floor Fab. Wall Fab. Wall w/ ledge			P
Angel Bracket (WAC)			P
PVC Pipe (Drain) 3/4" x 10' 1' x 10'			P
Leaktest Existing Copper Tube (Ø dia ____ x ____, estimated length ____ ft)			P
Dismantling Fee (Existing Air-Conditioning unit capacity ____ HP)			P
Chipping Works	5m	500	P 2,500.00
Others _____			
Initial Charge			P 7,500.00
TOTAL ESTIMATE			P 20,500.00

Note:

1. Final charges will be based on actual installation.
2. Survey fee will be deducted in the installation fee.

Prepared by:

ROMEL MASUBA

Signature Over Printed Name

Customer Conforme:

Signature Over Printed Name