

MR. KENDRICK CHUA
21 TAFT WEST GREENHILLS, BRGY. GREENHILLS, SAN JUAN CITY
TEL#: 0917-8190131

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KL-IF60-G6H1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 58,140 KJ/h (5.0TR) FULL DC INVERTER R32 SINGLE PHASE	165,995.00	108,836.30	PHP	108,836.30
1	UNIT/S	MODEL: KLM-IC60-AA1M32 KOLIN FLOOR/CEILING AIRCONDITIONER 55,503 KJ/h (5.0TR) INVERTER R-32 SINGLE PHASE	151,995.00	112,476.30	PHP	112,476.30
1	UNIT/S	MODEL: KLG-IF40-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 37,980 KJ/h (3.0TR) FULL DC INVERTER R-32 SINGLE PHASE	113,195.00	76,764.30	PHP	76,764.30
1	UNIT/S	MODEL: KLM-IC40-AA1M32 KOLIN FLOOR/CEILING AIRCONDITIONER 37,980 KJ/h (3.0TR) DC INVERTER R-32	117,995.00	87,316.30	PHP	87,316.30
3	UNIT/S	MODEL: KSG-IWF-30WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 KJ/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	49,680.30	PHP	149,040.90
1	UNIT/S	MODEL: KSG-IWF-25WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 KJ/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	44,056.30	PHP	44,056.30
3	UNIT/S	MODEL: KSG-IWF-20WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 19,000 KJ/h (2.0HP) FULL DC INVERTER W/ WIFI R-32	59,595.00	37,100.30	PHP	111,300.90
1	UNIT/S	MODEL: KSM-IW10-WCT10M1M32 KOLIN WALL MOUNTED CERTUS SERIES AIRCONDITIONER 9,800 KJ/h (1.0HP) REGULAR INVERTER W/ WIFI R-32	29,995.00	18,196.30	PHP	18,196.30
1	UNIT/S	MODEL: KAG-75WCINV KOLIN WINDOW TYPE QUAD SERIES AIRCONDITIONER 9,800 KJ/h (.75HP) FULL DC INVERTER W/ WIFI R-32 (WxDxH) 18"x25"x14"	26,195.00	18,084.30	PHP	18,084.30
TOTAL UNIT COST					PHP	726,071.90
ESTIMATED COST OF INSTALLATION (please see attached) w/ installation of old units					PHP	328,050.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	1,054,121.90

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.
FOR FLOOR/CEILING: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.
FOR SPLIT TYPE: ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB, TEN (10) YEARS WARRANTY ON COMPRESSOR.
FOR WINDOW TYPE: ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB, TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).

*** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:

MARTINATHANIEL R. FLORES
KMI SUPERVISOR

KMI-QUOTE-08-25-0611-rev5
BOD-26%/14K/7K/4K/1.3K

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines



December 3, 2025

KENDRICK CHUA

21 Taft West Greenhills, Brgy Greenhills San Juan City

0917-8190131

MODEL	Qty
KLG-IF60-G6H1M32	1
KLM-IC60-AA1M32-I	1
KLG-IF40-5G1M32	1
KLM-IC40-AA1M32-I	1
KSG-IWF-30WFY8K1M32	3
KSG-IWF-25WFY8K1M32	1
KSG-IWF-20WFY8K1M32	3
KSM-IW10-WCT10M1M32	1
KAG-75WCINV	1

REVS

MAIDS ROOM	Area	10 sqm
------------	------	--------

ACU 1	1.0HP Wall Mounted Inverter	KSM-IW10-WCT10M1M32			
	Estimated Pipe Length = 10 ft				
	Estimated Royal Cord Length = 15 ft				
	Initial Charge				₱ 7,500.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Wall)				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Royal Cord (comm. wire)	2.mm2 x 4C	5 ft	₱ 100.00/ft	₱ 500.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
					₱ 2,100.00
	Estimated Charges				₱ 9,600.00

KITCHEN AREA	Area	42 sqm
--------------	------	--------

ACU 2	3.0 HP Wall Mounted Inverter	KSG-IWF-30WFY8K1M32			
	Estimated Pipe Length = 30 ft				
	Estimated Royal Cord Length = 35 ft				
	Initial Charge				₱ 8,500.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Wall)				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Copper Tube	Ø 1/4" x Ø 5/8"	20 ft	₱ 400.00/ft	₱ 8,000.00
	Royal Cord (comm. wire)	2.mm2 x 4C	25 ft	₱ 100.00/ft	₱ 2,500.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	Rubber Insulation	2 1/8" x 3/4" x 6'	4 pc/s	₱ 350.00/pc	₱ 1,400.00
	Full thread	3/8" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
	Metal Clamp	3"	8 pc/s	₱ 120.00/pc	₱ 960.00
	PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
					₱ 14,610.00
	Estimated Charges				₱ 23,110.00

DINING AREA	Area	38 sqm
-------------	------	--------

ACU 3	3.0 HP Wall Mounted Inverter	KSG-IWF-30WFY8K1M32			
-------	------------------------------	---------------------	--	--	--

Estimated Pipe Length = 14 ft

Estimated Royal Cord Length = 19 ft

Initial Charge

₱ 8,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Royal Cord (comm. wire)	2.mm2 x 4C	9 ft	₱ 100.00/ft	₱ 900.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 2,500.00

Estimated Charges	₱ 11,000.00
--------------------------	-------------

GUEST/ ENTERTAINMENT ROOM

Area 32 sqm

ACU 4 2.0HP Wall Mounted Inverter

KSM-IW20-6H1M(OLD UNIT)

Estimated Pipe Length = 23 ft

Estimated Royal Cord Length = 28 ft

Initial Charge

₱ 7,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	13 ft	₱ 350.00/ft	₱ 4,550.00
Royal Cord (comm. wire)	2.mm2 x 4C	18 ft	₱ 100.00/ft	₱ 1,800.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 7,950.00

Estimated Charges	₱ 15,450.00
--------------------------	-------------

DRIVER ROOM

Area 5 sqm

ACU 5 0.75 HP Window type Inverter

*KAG-75WCINV *

Initial Charge

₱ 1,200.00

Includes:

Labor

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Window type bracket		1 pc/s	₱ 600.00/pc	₱ 600.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 775.00

Estimated Charges	₱ 1,975.00
--------------------------	------------

Estimated Charges	₱ 31,065.00
-------------------	-------------

MAIN LIVING AREA	Area 44.5 sqm
-------------------------	----------------------

ACU 8 6.0 HP Floor Standing Inverter *KL-IF60-G6H1M32*

Estimated Pipe Length = 43 ft

Estimated Royal Cord Length = 50 ft

Initial Charge

₱ 14,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	33 ft	₱ 400.00/ft	₱ 13,200.00
Royal Cord (comm. wire)	40 ft	₱ 100.00/ft	₱ 4,000.00
Royal Cord (ACCU-Breaker)	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Outdoor bracket	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1 pc/s	₱ 200.00/pc	₱ 200.00
Drain Hose	7 ft	₱ 25.00/ft	₱ 175.00
			₱ 24,065.00

Estimated Charges

₱ 38,065.00

SECOND FLOOR

ELLA'S ROOM	Area 24.6 sqm
--------------------	----------------------

ACU 9 2.0 HP Wall Mounted Inverter *KSG-IWF-20Wfy8K1M32*

Estimated Pipe Length = 12 ft

Estimated Royal Cord Length = 17 ft

Initial Charge

₱ 7,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	2 ft	₱ 350.00/ft	₱ 700.00
Royal Cord (comm. wire)	7 ft	₱ 100.00/ft	₱ 700.00
Royal Cord (ACCU-Breaker)	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
PVC blue	2 pc/s	₱ 150.00/pc	₱ 300.00
			₱ 3,000.00

Estimated Charges

₱ 10,500.00

PIA'S ROOM	Area	26 sqm
-------------------	------	--------

ACU 10	2.0 HP Wall Mounted Inverter		KSG-IWF-20Wfy8K1M32		
	Estimated Pipe Length	= 10 ft			
	Estimated Royal Cord Length	= 15 ft			
	Initial Charge		₱ 7,500.00		
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Wall)				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Royal Cord (comm. wire)	2.mm2 x 4C	5 ft	₱ 100.00/ft	₱ 500.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
					₱ 2,100.00
	Estimated Charges				₱ 9,600.00

KARA'S ROOM	Area	28 sqm
--------------------	------	--------

ACU 11	2.0 HP Wall Mounted Inverter		KSG-IWF-20Wfy8K1M32		
	Estimated Pipe Length	=	10	ft	
	Estimated Royal Cord Length	=	15	ft	
	Initial Charge				₱ 7,500.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Wall)				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Royal Cord (comm. wire)	2.mm2 x 4C	5 ft	₱ 100.00/ft	₱ 500.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
					₱ 2,100.00
	Estimated Charges				₱ 9,600.00

HALLWAY	Area	37 sqm
----------------	------	--------

ACU 12	3.0 HP Wall Mounted Inverter		KSG-IWF-30Wfy8K1M32	
	Estimated Pipe Length	= 20 ft		
	Estimated Royal Cord Length	= 25 ft		
	Initial Charge			₱ 8,500.00
	Includes:			
	Labor			
	10ft Copper Tube			
	10ft Royal Cord			
	Outdoor Bracket (Wall)			
	Consumables			
	Installation Materials	Description	Qty Price per qty	Subtotal
	Copper Tube	Ø 1/4" x Ø 5/8"	10 ft ₱ 400.00/ft	₱ 4,000.00
	Royal Cord (comm. wire)	2.mm2 x 4C	15 ft ₱ 100.00/ft	₱ 1,500.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft ₱ 60.00/ft	₱ 300.00
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s ₱ 1,000.00/pc	₱ 1,000.00
	Rubber Insulation	2 1/8" x 3/4" x 6'	2 pc/s ₱ 350.00/pc	₱ 700.00
	Outdoor bracket	Fabricated wall	1 pc/s ₱ 5,000.00/pc	₱ 5,000.00
	PVC blue	3/4" x 10'	5 pc/s ₱ 150.00/pc	₱ 750.00
				₱ 13,250.00
	Estimated Charges			₱ 21,750.00

Estimated Charges	₱ 23,750.00
-------------------	-------------

ATTICK		Area		37 sqm
ACU 15	4.0 HP Ceiling Suspended Inverter	KLM-IC40-AA1M32-I		
	Estimated Pipe Length = 30 ft			
	Estimated Royal Cord Length = 35 ft			
	Initial Charge			₱ 12,000.00
	Includes:			
	Labor			
	10ft Copper Tube			
	10ft Royal Cord			
	Consumables			
	Installation Materials	Description	Qty Price per qty	Subtotal
	Copper Tube	Ø 3/8" x Ø 5/8"	20 ft ₱ 400.00/ft	₱ 8,000.00
	Royal Cord (comm. wire)	2.mm2 x 4C	25 ft ₱ 100.00/ft	₱ 2,500.00
	Royal Cord (ACCU-Breaker)	5.5mm x 3c	5 ft ₱ 70.00/ft	₱ 350.00
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s ₱ 1,000.00/pc	₱ 1,000.00
	Rubber Insulation	2 1/8" x 3/4" x 6'	4 pc/s ₱ 350.00/pc	₱ 1,400.00
	Full thread	3/8" x 10'	1 pc/s ₱ 150.00/pc	₱ 150.00
	Metal Clamp	3"	4 pc/s ₱ 120.00/pc	₱ 480.00
	Indoor bracket	Fabricated floor	1 pc/s ₱ 2,500.00/pc	₱ 2,500.00
	Outdoor bracket	Fabricated wall	1 pc/s ₱ 5,000.00/pc	₱ 5,000.00
	PVC blue	3/4" x 10'	5 pc/s ₱ 150.00/pc	₱ 750.00
				₱ 22,130.00
Estimated Charges				₱ 34,130.00
Total Estimated Charges				₱ 328,050.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location based in floor plan. Recommendation not yet final.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for markings of each units and site visit before installation.need to open the ceiling.
- 4 Working days: Monday to Saturday, 8am- 5pm with parking.Need working permit.
- 5 Mechanical Plans, Permits, Electrical permits not included.
- 6 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 7 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , should be provided by customer's contractor.
- 8 **Final charges will be based on actual installation.**

Prepared by:

Jeffrey Dadios


Field Surveyor

Customer Conformance:


Signature Over Printed Name

Reviewed by:


Engr. Kenneth Zamora

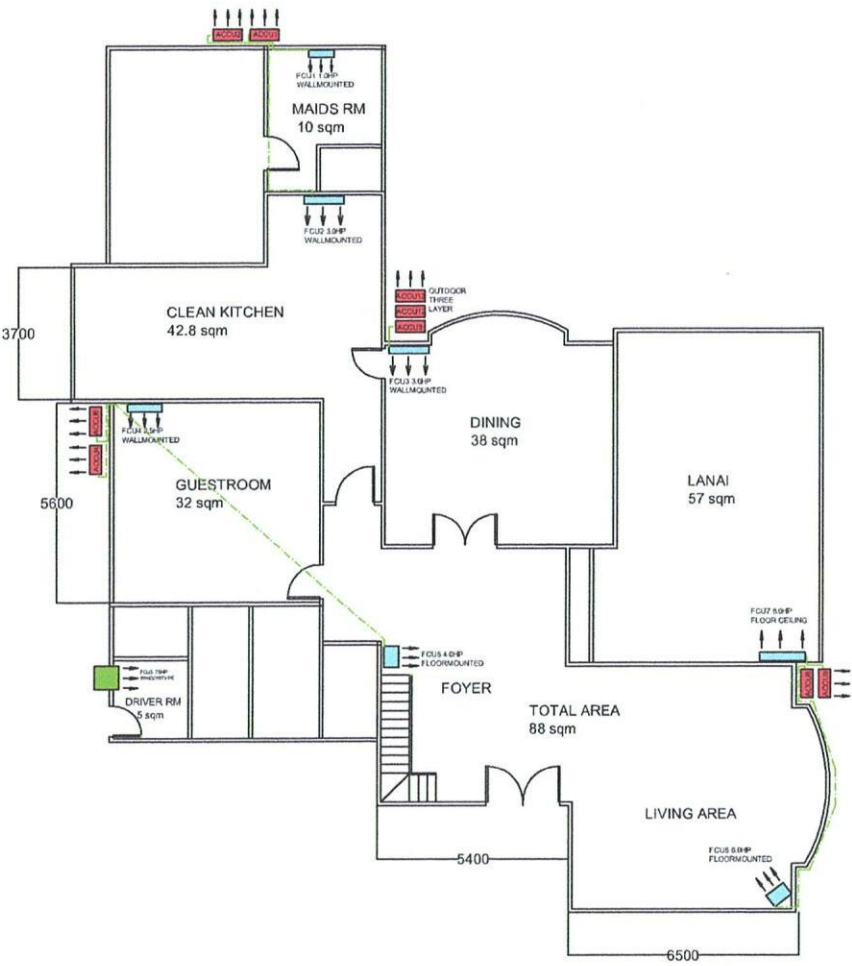

GROUND FLOOR

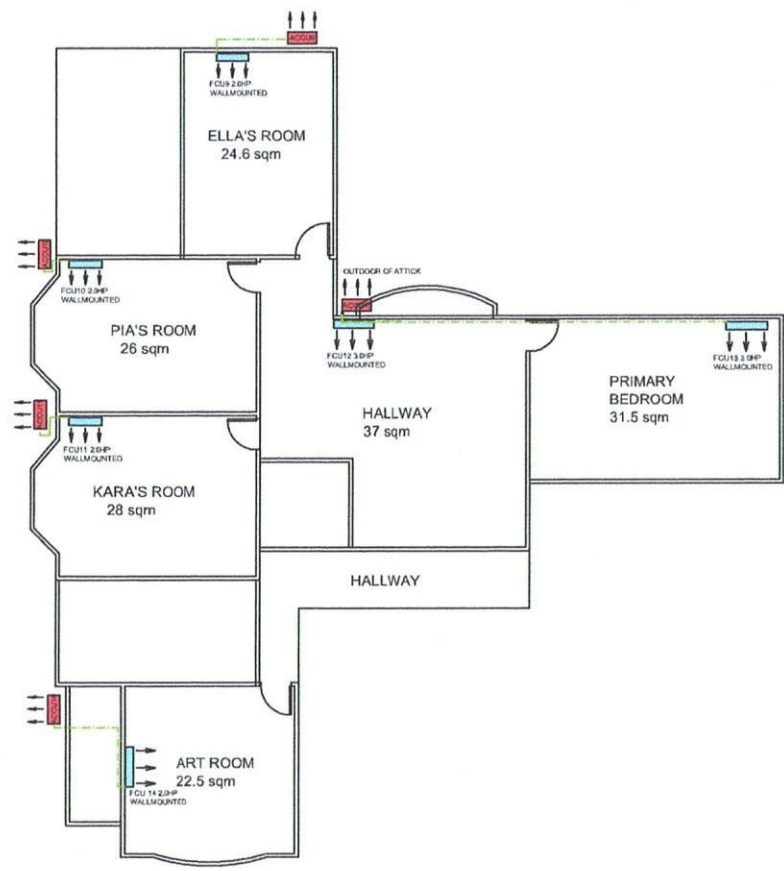

SECOND FLOOR

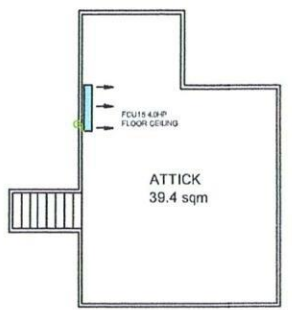

ATTICK FLOOR