



February 13, 2025

MR. JASON TAN
11 DADIANGAS ST. DAMAR VILLAGE, SGT. RIVERA, QUEZON CITY
TEL#: 0917-5317531

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSM-IW15-WCT10M1M32 KOLIN WALL MOUNTED CERTUS SERIES AIRCONDITIONER 12,660 Kj/h (1.5HP) REGULAR INVERTER R-32	32,995.00	21,076.20	PHP	21,076.20
TOTAL UNIT COST					PHP	21,076.20
ESTIMATED COST OF INSTALLATION w/ dismantling of old unit (please see attached)					PHP	13,645.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	35,321.20

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual).**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:

MART NATHANIEL R. FLORES
KMI-SUPERVISOR


Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-02-25-0108
ECY-24%/4K

Conforme:

SIGNATURE OVER PRINTED NAME

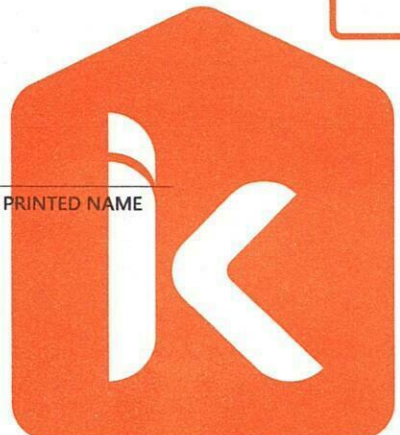

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines

Customer Name : J&S TRV Date : 2-6-8
 Address : 11 DOSTA/1625 ST. DOSTA/1625 VILLAGE SPT SJR No. : 2009-11
PRINCE, D.C.

Establishment Type: Residential Area Surveyed : REST ROOM 1
 Commercial Area Surveyed : _____

Recommended Product Model : KSLM-1415 INJECTION 1m32

Cooling Capacity Computation

Floor Area : 14.4 sqm.
 Ceiling Height : 2.6 mtr.

note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed.

Floor Area :	<u>14.4</u>	x	550 Btu/h	<u>7920</u>	Btu/h
Ceiling Height (excess of 3 mtrs.) :		x	20%		Btu/h
Window Direct Sunlight		x	20% - 50%	<u>1080</u>	Btu/h
Total Cooling Capacity				<u>9504</u>	Btu/h

Add : Additional Heat Load

No. of Person	<u>2</u>	x	300 Btu/h	<u>600</u>	Btu/h
No. of Ordinary Light (<40w)	<u>3</u>	x	200 Btu/h	<u>600</u>	Btu/h
No. of Special Light (>40w)		x	400 Btu/h		Btu/h
No. of Refrigerator (< 6 cu.ft.)		x	400 Btu/h		Btu/h
No. of Refrigerator (> 6 cu.ft.)		x	800 Btu/h		Btu/h
No. of Cooking Range		x	1500 Btu/h		Btu/h
No. of Laptop Computer		x	150 Btu/h		Btu/h
No. of Desktop Computer		x	400 Btu/h		Btu/h
No. of Printer		x	500 Btu/h		Btu/h
No. of Photocopier		x	1000 Btu/h		Btu/h
Total Cooling Capacity				<u>1200</u>	Btu/h

Recommended Cooling Capacity 10,704 Btu/h

Note : Compressor warranty will be **reduced to** ____ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.


Scope of Work Agreement

- 1. Copper tube lay-out Expose Embedded
- 2. Chipping Included Not Included
- 3. Fabricated Bracket Yes Shop Site No
- 4. Service Ledge Yes No
- 5. Dismantling of existing Aircon Included Not Included
- 6. Ducting Yes No

Dimension : _____

- 7. Plastering, carpentry and restoration works are to be done by the customer.
- 8. Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
- 9. Processing of mechanical plan, working permit, electrical permit are to be done by the customer.
- 10. Other concern;

DISMANTLE AND REPAIR UNIT - 4 PAX.
DRAFT WORKS OUTSIDE AIRCRAFT IF OUTSIDE
WORKS NOT FIT ON UNIT. NEED ROOF
AND HANGING (XPOSE CONDENSATE AND DRAINAGE
WIRE LEFT AT XPOSE. USE EXISTING AIRCRAFT.

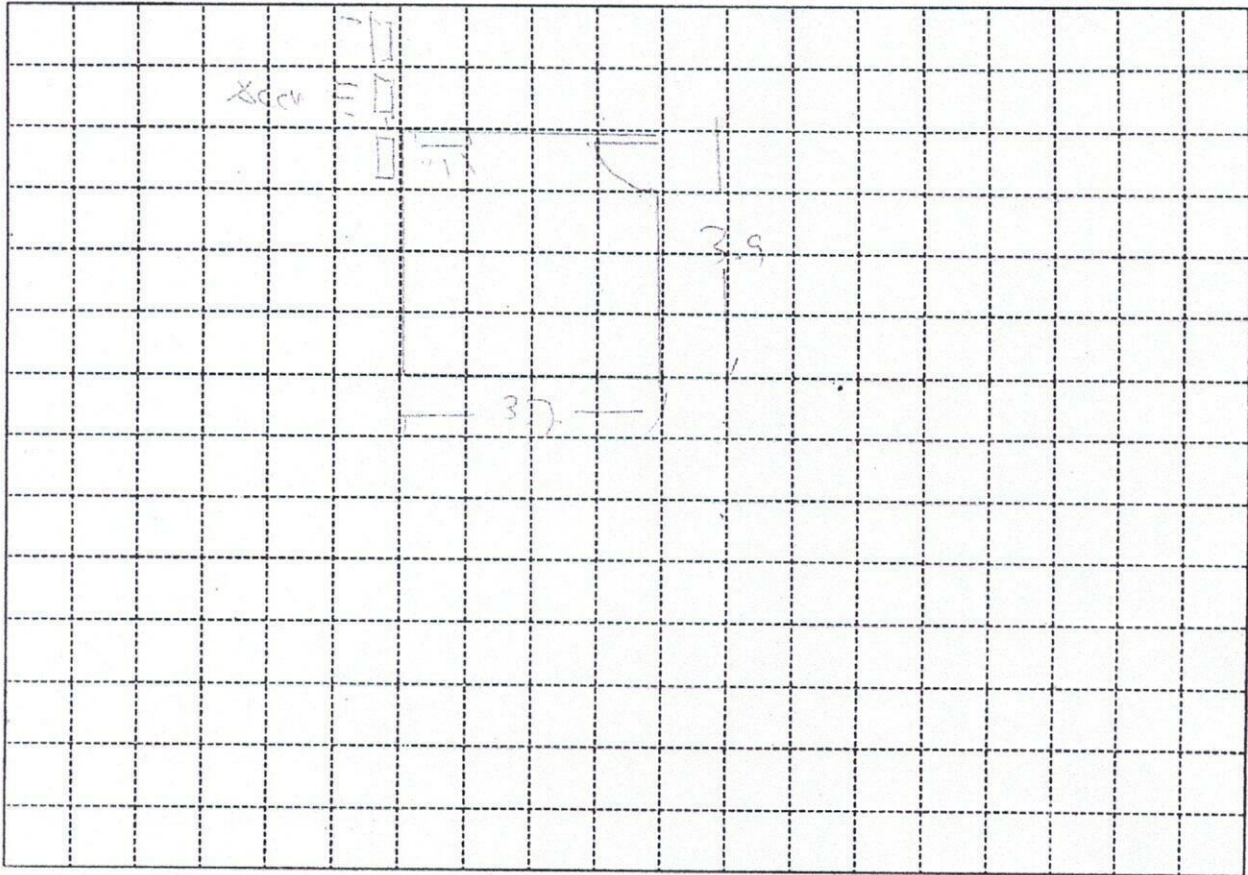

Indoor Unit Location : 4 INCHES FROM LEFT WALL WITH LOCATOR
 Outdoor Unit Location : SAME LOCATOR
 Pipe Length : 13 FT
 Special Note :

Installation Cost Estimate			
Material Description	Qty.	Unit Cost	Total Cost
Copper Tube (excess of 10 ft.)	2330, 2430, 2520, 3520, 4620	350	1050
Wire (Royal Cord-signal wire) (excess of 10ft.)	2.0mmx4C	100	1000
Wire (Royal Cord - Breaker to ODU)	3.5mm / 5.5mm x 3C	60	420
Circuit Breaker	20A, 30A, 40A/1ph, 40A/3ph		
Bracket (ODU)	(Imptd. / Fabricated) (Floor / Wall)	1500	1500
Bracket (WAC)	Angle Type		
PVC Pipe (drain)	1/2" (3/4")	2000	200
PVC Pipe (electrical)	3/4", 1"		
Drain Pump			
Drain Pump Hose		175	175
Chipping Works	mtr.		
Dismantling Fee (existing air-conditioner)			200
Initial Charge			670
TOTAL ESTIMATE			P 13,645

- Note :
1. Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials.
 2. Survey fee will be deducted in the installation fee.

Prepared by:
 Signature Over Printed Name

Customer Conforme:
 Signature Over Printed Name