



February 19, 2025

EVERLIVING COMPANY INC.
SANCTUARIUM BLDG. #739 G. ARANETA AVE., QUEZON CITY
TEL#: 0906-2570532 / 0927-5593377

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
4	UNIT/S	MODEL: KLM-IS60-AA1M32 KOLIN CEILING CASSETTE AIRCONDITIONER 55,503 Kj/h (5.0TR) DC INVERTER R-32 SINGLE PHASE	154,995.00	117,796.20	PHP	471,184.80
TOTAL UNIT COST						471,184.80
ESTIMATED COST OF INSTALLATION (please see attached)						428,060.00
OTHERS: DELIVERY CHARGE						600.00
TOTAL ESTIMATED COST OF THE PROJECT						899,844.80

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR CEILING CASSETTE (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.


PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s). this cost cannot avail separately (cost will be based on actual).


We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,


JANELLEN S. LIM
KMI-ASSISTANT

Noted by:


MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

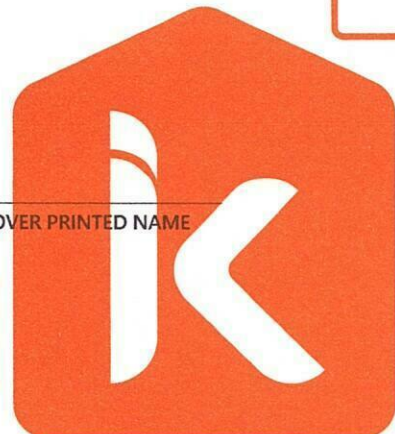

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-02-25-0131
REG-24%

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.
1854 Sta. Rita St., Guadalupe Nuevo, Makati City
Tel.: (632) 8852-6473
Fax: (632) 8852-2170 / (632) 8852-4792
 www.kolinphil.com.ph / kolinphilippines



MODEL QUANTITY
 KLM-IS60-AAM32-I 4

RECOMMENDATION
 EIGHT FLOOR

CHAMBER H Area = 81 sq.m

ACU 1 6.0hp Ceiling Cassette Inverter KLM-IS60-AAM32-I
 Estimated Pipe Length : 164 ft
 Estimated Royal Cord Length : 171 ft
 Initial Charge P 15,000.00

Includes:

Labor
 10ft Copper Tube
 10ft Royal Cord
 Indoor bracket (full thread)
 Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	3/8"x 5/8"	154 ft P	400.00 / ft	P 61,600.00
Royal Cord	2.mm2 x 4C	161 ft P	100.00 / ft	P 16,100.00
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft P	70.00 / ft	P 490.00
Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s) P	1,000.00 / pc	P 1,000.00
Rubber Insulation	2 1/8"x3/4" x 6'	25 pc(s) P	350.00 / pc	P 8,750.00
Rubber Insulation	1 1/8"x3/4" x 6'	5 pc(s) P	150.00 / pc	P 750.00
Full Thread	3 meters	6 pc(s) P	150.00 / pc	P 900.00
Pipe hanger	3 inches	20 pc(s) P	120.00 / pc	P 2,400.00
Outdoor Bracket(floor)	fabricated	1 pc(s) P	2,500.00 / pc	P 2,500.00
PVC(Drainline)	blue-1 inch	5 pc(s) P	200.00 / pc	P 1,000.00
				P 95,490.00

Estimated Charges P 110,490.00

ACU 2 6.0hp Ceiling Cassette Inverter KLM-IS60-AAM32-I
 Estimated Pipe Length : 138 ft
 Estimated Royal Cord Length : 145 ft
 Initial Charge P 15,000.00

Includes:

Labor
 10ft Copper Tube
 10ft Royal Cord
 Indoor bracket (full thread)
 Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	3/8"x 5/8"	128 ft P	400.00 / ft	P 51,200.00
Royal Cord	2.mm2 x 4C	135 ft P	100.00 / ft	P 13,500.00
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft P	70.00 / ft	P 490.00
Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s) P	1,000.00 / pc	P 1,000.00
Rubber Insulation	2 1/8"x3/4" x 6'	25 pc(s) P	350.00 / pc	P 8,750.00
Rubber Insulation	1 1/8"x3/4" x 6'	5 pc(s) P	150.00 / pc	P 750.00
Full Thread	3 meters	10 pc(s) P	150.00 / pc	P 1,500.00
Pipe hanger	3 inches	20 pc(s) P	120.00 / pc	P 2,400.00
Outdoor Bracket(floor)	fabricated	1 pc(s) P	2,500.00 / pc	P 2,500.00
PVC(Drainline)	blue-1 inch	5 pc(s) P	200.00 / pc	P 1,000.00
				P 83,090.00

Estimated Charges P 98,090.00

CHAMBER B

Area ≈ 106 sq.m

ACU 3 6.0hp Ceiling Cassette Inverter**KLM-IS60-AAM32-I**

Estimated Pipe Length : 164 ft

Estimated Royal Cord Length : 171 ft

Initial Charge P 15,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor bracket (full thread)

Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	3/8"x 5/8"	154 ft P	400.00 / ft	P 61,600.00
Royal Cord	2.mm2 x 4C	161 ft P	100.00 / ft	P 16,100.00
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft P	70.00 / ft	P 490.00
Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s) P	1,000.00 / pc	P 1,000.00
Rubber Insulation	2 1/8"x3/4" x 6'	22 pc(s) P	350.00 / pc	P 7,700.00
Rubber Insulation	1 1/8"x3/4" x 6'	5 pc(s) P	150.00 / pc	P 750.00
Full Thread	3 meters	10 pc(s) P	150.00 / pc	P 1,500.00
Pipe hanger	3 inches	20 pc(s) P	120.00 / pc	P 2,400.00
PVC(Drainline)	blue-1 inch	5 pc(s) P	200.00 / pc	P 1,000.00
Outdoor Bracket(wall)	fabricated	1 pc(s) P	5,000.00 / pc	P 5,000.00
Drain Hose	White -1/2"	7 ft P	25.00 / ft	P 175.00
				P 97,715.00

Estimated Charges**P 112,715.00****ACU 4 6.0hp Ceiling Cassette Inverter****KLM-IS60-AAM32-I**

Estimated Pipe Length : 145 ft

Estimated Royal Cord Length : 152 ft

Initial Charge P 15,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor bracket (full thread)

Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	3/8"x 5/8"	135 ft P	400.00 / ft	P 54,000.00
Royal Cord	2.mm2 x 4C	142 ft P	100.00 / ft	P 14,200.00
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft P	70.00 / ft	P 490.00
Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s) P	1,000.00 / pc	P 1,000.00
Rubber Insulation	2 1/8"x3/4" x 6'	25 pc(s) P	350.00 / pc	P 8,750.00
Rubber Insulation	1 1/8"x3/4" x 6'	5 pc(s) P	150.00 / pc	P 750.00
Full Thread	3 meters	10 pc(s) P	150.00 / pc	P 1,500.00
Pipe hanger	3 inches	20 pc(s) P	120.00 / pc	P 2,400.00
Outdoor Bracket(floor)	fabricated	1 pc(s) P	2,500.00 / pc	P 2,500.00
PVC(Drainline)	blue-1 inch	5 pc(s) P	200.00 / pc	P 1,000.00
Outdoor Bracket(wall)	fabricated	1 pc(s) P	5,000.00 / pc	P 5,000.00
Drain Hose	White -1/2"	7 ft P	25.00 / ft	P 175.00
				P 91,765.00

Estimated Charges**P 106,765.00**

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Note:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for marking and site visit before installation.
- 4 Copertube expose going inside the ceiling, customer make a manhole in the ceiling.
- 5 Working days: Monday to Saturday, 8am- 5pm with parking.6 pax
- 6 Mechanical Plans, Permits, Electrical permits not included.
- 7 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 8 Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , is not included in the scope of work of Kolin.
- 9 **Final charges will be based on actual installation.**

Prepared by:

Jeoffrey Dadios
Field Surveyor

Customer Conformance:

Signature Over Printed Name

Reviewed by:

Engr. Kenneth Zamora
Service Supervisor

