



February 18, 2025

MR. EDMOND SY
#28 STO. TOMAS ST., BRGY. DON MANUEL, QUEZON CITY
TEL#: 0917-8871681

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

**** OPTION 1**

| QTY | U/M | MODEL / DESCRIPTION | SRP | DISCOUNTED PRICE | | AMOUNT |
|--|--------|---|------------|------------------|-----|------------|
| 2 | UNIT/S | MODEL: KLM-SF70-4F1M410 KOLIN FLOOR MOUNTED AIRCONDITIONER 56,970 Kj/h (5.0TR) NON-INVERTER R-410A SINGLE PHASE | 110,995.00 | 81,356.20 | PHP | 162,712.40 |
| 1 | UNIT/S | MODEL: KLG-IF40-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 37,980 Kj/h (3.0TR) FULL DC INVERTER R-32 SINGLE PHASE | 113,195.00 | 79,028.20 | PHP | 79,028.20 |
| 1 | UNIT/S | MODEL: KLG-SF40-WBR6H1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 39,596 Kj/h (3.0TR) NON-INVERTER R-32 SINGLE PHASE | 80,495.00 | 58,676.20 | PHP | 58,676.20 |
| 2 | UNIT/S | MODEL: KSG-IWF-30WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32 | 76,595.00 | 51,212.20 | PHP | 102,424.40 |
| TOTAL UNIT COST | | | | | | 402,841.20 |
| ESTIMATED COST OF INSTALLATION (please see attached) | | | | | | 151,930.00 |
| OTHERS: DELIVERY CHARGE | | | | | | 600.00 |
| TOTAL ESTIMATED COST OF THE PROJECT | | | | | | 555,371.20 |

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately.**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:


MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-02-25-0119
REG-24%/3K/7K/2.5K

Conforme: _____
SIGNATURE OVER PRINTED NAME

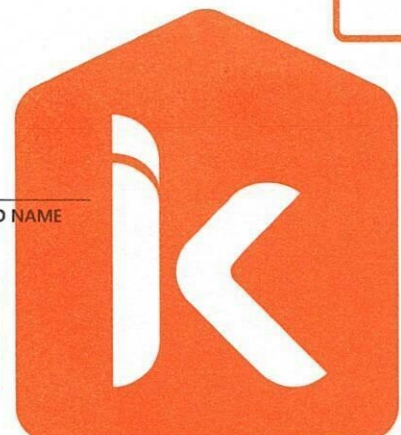

Kolin Marketing, Inc.
1854 Sta. Rita St., Guadalupe Nuevo, Makati City
Tel.: (632) 8852-6473
Fax: (632) 8852-2170 / (632) 8852-4792
www.kolinphil.com.ph / [kolinphilippines](http://kolinphilippines.com)

FEBRUARY 10, 2025

EDMOND SY

#28 Sto. Tomas St. Brgy, Don Manuel, Quezon City

0917-8871681

| MODEL | QUANTITY |
|----------------------|----------|
| KLM-SF70-4F1M410 | 2 |
| KLG-IF40-5G1M32 | 1 |
| KLG-SF40-WBR6H1M32 | 1 |
| KSG-IWF-30Wfy-8K1M32 | 2 |

OPTION 1-mixed

GROUND FLOOR

| | |
|-----------------|------------------|
| OFFICE 1 | Area ≈ 41.5 sq.m |
|-----------------|------------------|

| | | |
|--------------|-------------------------------------|------------------------|
| ACU 1 | 4.0hp Floor mounted Inverter | KLG-IF40-5G1M32 |
| | Estimated Pipe Length : | 20 ft |
| | Estimated Royal Cord Length : | 25 ft |
| | Initial Charge | P 11,000.00 |

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket

Other Consumables

| Additional Charges | Description | Unit | Price Per Unit | Subtotal |
|--------------------------|-------------|---------|-----------------|-------------|
| Copper Tube | 3/8"x 5/8" | 10 ft | P 400.00 / ft | P 4,000.00 |
| Royal Cord | 2.mm2 x 4C | 15 ft | P 100.00 / ft | P 1,500.00 |
| Royal Cord (ODU-Breaker) | 5.5mm2 x 3C | 5 ft | P 70.00 / ft | P 350.00 |
| Circuit Breaker(NEMA) | 40A/ 1Ph | 1 pc(s) | P 1,000.00 / pc | P 1,000.00 |
| Outdoor Bracket(wall) | Fabricated | 1 pc(s) | P 5,000.00 / pc | P 5,000.00 |
| Drain Hose | White -1/2" | 5 ft | P 25.00 / ft | P 125.00 |
| | | | | P 11,975.00 |

| | |
|--------------------------|--------------------|
| Estimated Charges | P 22,975.00 |
|--------------------------|--------------------|

SECOND FLOOR

| | |
|-------------------------|------------------|
| OFFICE 2 & 3 | Area ≈ 57.4 sq.m |
|-------------------------|------------------|

| | | |
|--------------|-----------------------------------|--------------------------------|
| ACU 2 | 3.0hp Wallmounted Inverter | KSG-IWF-30Wfy-8K1M32 |
| | Estimated Pipe Length : | 46 ft |
| | Estimated Royal Cord Length : | 51 ft |
| | Initial Charge | P 7,700.00 |
| | Includes: | less outdoor bracket inclusion |
| | Labor | |
| | 10ft Copper Tube | |
| | 10ft Royal Cord | |
| | Other Consumables | |

| Additional Charges | Description | Unit | Price Per Unit | Subtotal |
|-------------------------------|------------------|---------|-----------------|-------------|
| Copper Tube | 3/8"x 5/8" | 36 ft | P 400.00 / ft | P 14,400.00 |
| Royal Cord | 2.mm2 x 4C | 41 ft | P 100.00 / ft | P 4,100.00 |
| Royal Cord (ODU-Breaker) | 3.5mm2 x 3C | 5 ft | P 70.00 / ft | P 350.00 |
| Circuit Breaker(NEMA) | 30A/ 1Ph | 1 pc(s) | P 1,000.00 / pc | P 1,000.00 |
| Rubber Insulation | 2 1/8"x3/4" x 6' | 5 pc(s) | P 350.00 / pc | P 1,750.00 |
| Full Thread | 3 meters | 2 pc(s) | P 150.00 / pc | P 300.00 |
| Pipe hanger | 3 inches | 8 pc(s) | P 120.00 / pc | P 960.00 |
| Outdoor Bracket(Wall w/ledge) | fabricated | 1 pc(s) | P 6,500.00 / pc | P 6,500.00 |
| Drain Hose | White -1/2" | 5 ft | P 25.00 / ft | P 125.00 |
| | | | | P 29,485.00 |

| | |
|--------------------------|--------------------|
| Estimated Charges | P 37,185.00 |
|--------------------------|--------------------|

ACU 3 3.0hp Wallmounted Inverter KSG-IWF-30Wfy-8K1M32

Estimated Pipe Length : 27 ft
Estimated Royal Cord Length : 32 ft

Initial Charge

P 7,700.00
less outdoor
bracket
inclusion

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Other Consumables

| Additional Charges | Description | Unit | Price Per Unit | Subtotal |
|-------------------------------|-------------|---------|-----------------|-------------|
| Copper Tube | 3/8"x 5/8" | 17 ft | P 400.00 / ft | P 6,800.00 |
| Royal Cord | 2.mm2 x 4C | 22 ft | P 100.00 / ft | P 2,200.00 |
| Royal Cord (ODU-Breaker) | 3.5mm2 x 3C | 5 ft | P 70.00 / ft | P 350.00 |
| Circuit Breaker(NEMA) | 30A/ 1Ph | 1 pc(s) | P 1,000.00 / pc | P 1,000.00 |
| Outdoor Bracket(wall w/ledge) | fabricated | 1 pc(s) | P 6,500.00 / pc | P 6,500.00 |
| Drain Hose | White -1/2" | 5 ft | P 25.00 / ft | P 125.00 |
| | | | | P 16,975.00 |

Estimated Charges P **24,675.00**

THIRD FLOOR**SHOWROOM**

Area ≈ 58.2 sq.m

ACU 4 7.0hp Floor mounted Regular KLM-SF70-4F1M410

Estimated Pipe Length : 10 ft
Estimated Royal Cord Length : 17 ft

Initial Charge

P 14,000.00

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Indoor Bracket
Other Consumables

| Additional Charges | Description | Unit | Price Per Unit | Subtotal |
|-------------------------------|-------------|---------|-----------------|------------|
| Royal Cord | 2.mm2 x 4C | 7 ft | P 100.00 / ft | P 700.00 |
| Royal Cord (ODU-Breaker) | 5.5mm2 x 3C | 7 ft | P 70.00 / ft | P 490.00 |
| Circuit Breaker(NEMA) | 60A/ 1Ph | 1 pc(s) | P 1,000.00 / pc | P 1,000.00 |
| Outdoor Bracket(wall w/ledge) | fabricated | 1 pc(s) | P 6,500.00 / pc | P 6,500.00 |
| Drain Hose | White -1/2" | 7 ft | P 25.00 / ft | P 175.00 |
| | | | | P 8,865.00 |

Estimated Charges P **22,865.00**

TRAINING ROOM

Area ≈ 95.3 sq.m

ACU 5 7.0hp Floor mounted Regular KLM-SF70-4F1M410

Estimated Pipe Length : 10 ft
Estimated Royal Cord Length : 17 ft

Initial Charge

P 14,000.00

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Indoor Bracket
Other Consumables

| Additional Charges | Description | Unit | Price Per Unit | Subtotal |
|-------------------------------|-------------|---------|-----------------|------------|
| Royal Cord | 2.mm2 x 4C | 7 ft | P 100.00 / ft | P 700.00 |
| Royal Cord (ODU-Breaker) | 5.5mm2 x 3C | 7 ft | P 70.00 / ft | P 490.00 |
| Circuit Breaker(NEMA) | 60A/ 1Ph | 1 pc(s) | P 1,000.00 / pc | P 1,000.00 |
| Outdoor Bracket(wall w/ledge) | fabricated | 1 pc(s) | P 6,500.00 / pc | P 6,500.00 |
| Drain Hose | White -1/2" | 7 ft | P 25.00 / ft | P 175.00 |
| | | | | P 8,865.00 |

Estimated Charges P **22,865.00**

ACU 6 4.0hp Floor mounted Regular KLG-SF40-WBR6H1M32

Estimated Pipe Length : 10 ft
Estimated Royal Cord Length : 17 ft

Initial Charge P 11,000.00

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Indoor Bracket
Other Consumables

| Additional Charges | Description | Unit | Price Per Unit | Subtotal |
|-------------------------------|-------------|---------|-----------------|-------------|
| Royal Cord | 2.mm2 x 4C | 7 ft | P 100.00 / ft | P 700.00 |
| Royal Cord (ODU-Breaker) | 5.5mm2 x 3C | 7 ft | P 70.00 / ft | P 490.00 |
| Circuit Breaker(NEMA) | 40A/ 1Ph | 1 pc(s) | P 1,000.00 / pc | P 1,000.00 |
| Outdoor Bracket(wall w/ledge) | fabricated | 1 pc(s) | P 6,500.00 / pc | P 6,500.00 |
| Scaffoldings | 2sets | 1 pc(s) | P 1,500.00 / pc | P 1,500.00 |
| Drain Hose | White -1/2" | 7 ft | P 25.00 / ft | P 175.00 |
| | | | | P 10,365.00 |

Estimated Charges P 21,365.00

Total Estimated Charges P 151,930.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Note:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.recommendation for approved.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for marking and site visit before installation. Onsite fabricated outdoor bracket.
- 4 If units install at the cabinet need 10cm both side and 30cm upper portion.
- 5 ACU2 & ACU3 need to operate at the same time to avoid undercapacity.
- 6 Working days: Monday to Saturday, 8am- 5pm with parking.Need harness and rope.
- 7 Mechanical Plans, Permits, Electrical permits not included.
- 8 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 9 Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , is not included in the scope of work of Kolin.
- 10 Final charges will be based on actual installation.

Prepared by:


Jeoffrey Dadios
Field Surveyor

Customer Conformance:


Signature Over Printed Name

Reviewed by:


Engr. Kenneth Zamora
Service Supervisor

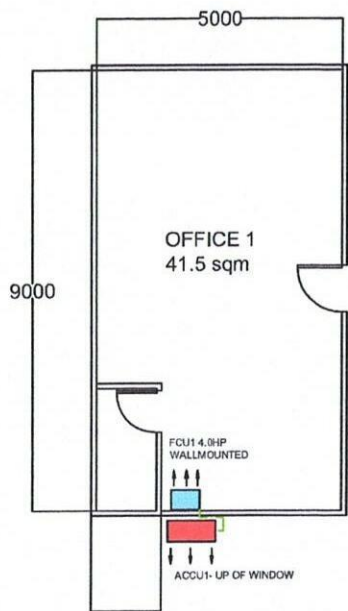

GROUND FLOOR

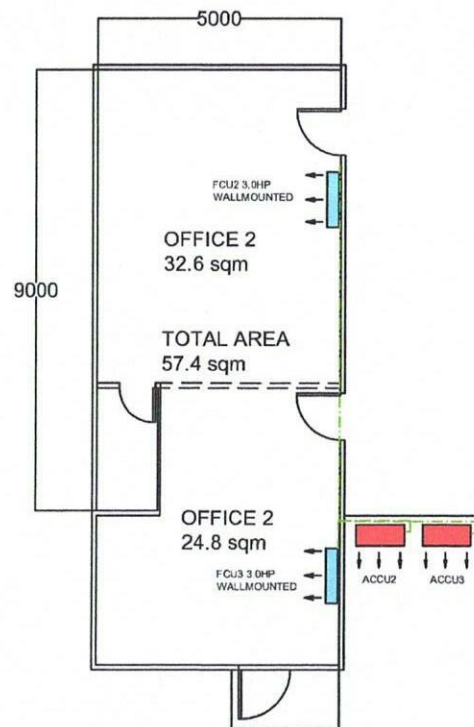

SECOND FLOOR

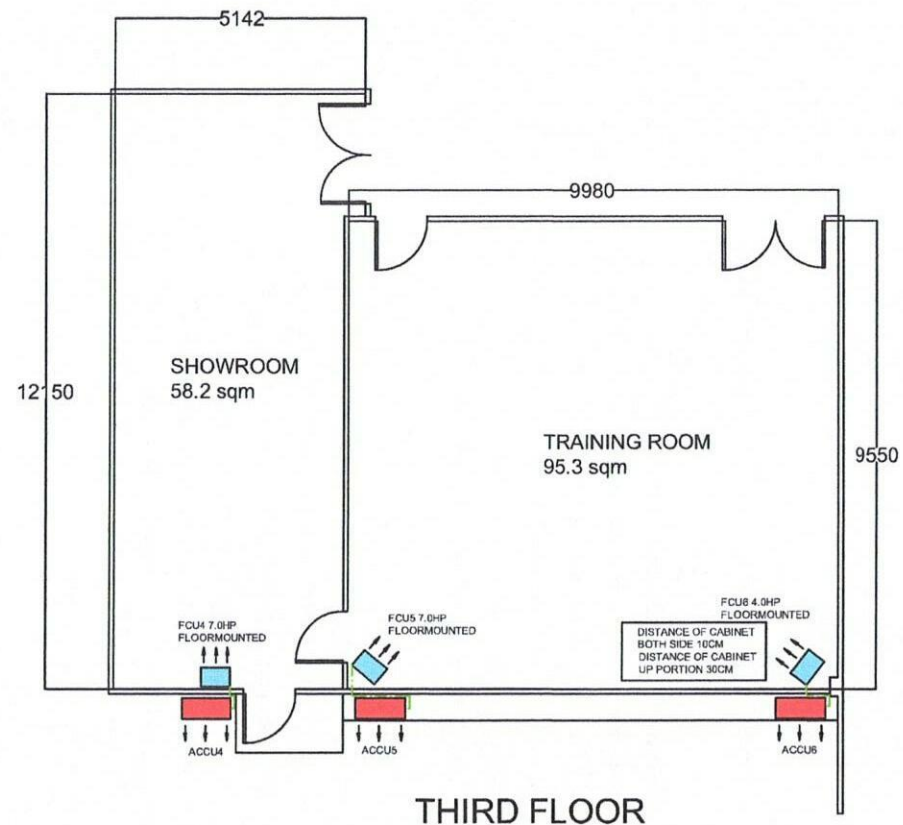

THIRD FLOOR