



February 24, 2025

SEC MOTOSUPPLY (Sct. Borromeo Branch)
ATTN: MR. REVO YAP
25 SCOUT BORROMEO ST., BRGY. DILIMAN, QUEZON CITY
TEL#: 0927-5869890

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

**** OPTION 2**

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
2	UNIT/S	MODEL: KL-IF60-G6H1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 58,140 Kj/h (5.0TR) FULL DC INVERTER R32 SINGLE PHASE	165,995.00	126,156.20	PHP	252,312.40
1	UNIT/S	MODEL: KSM-IW25-WCT10M1M32 KOLIN WALL MOUNTED CERTUS AIRCONDITIONER 23,210 Kj/h (2.5HP) REGULAR INVERTER W/ WIFI R-32	49,995.00	33,996.20	PHP	33,996.20
TOTAL UNIT COST					PHP	286,308.60
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	82,240.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	369,148.60

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual).**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-02-25-0140
ADR-24%/4K

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.
1854 Sta. Rita St., Guadalupe Nuevo, Makati City
Tel.: (632) 8852-6473
Fax: (632) 8852-2170 / (632) 8852-4792
www.kolinphil.com.ph / kolinphilippines



February 24, 2025

REVO YAP / SEC MOTOSUPPLY Sct. Borromeo Branch

25 Scout Borromeo St. Brgy, Diliman Quezon City

9275869890

vicmanhattan18@gmail.com

attn: Vicente Valiente

MODEL	QUANTITY
KL-IF60-G6H1M32	2
KSM-IW25-WCT10M1M32	1

OPTION 2

OFFICE AREA	Area ≈ 22.4 sq.m
-------------	------------------

ACU 1	2.5Hp Wallmounted Inverter	KSM-IW25-WCT10M1M32				
	Estimated Pipe Length :	23	ft			
	Estimated Royal Cord Length :	28	ft			
	Initial Charge				P	8,500.00
	Includes:					
	Labor					
	10ft Copper Tube					
	10ft Royal Cord					
	Outdoor Bracket (floor)					
	Other Consumables					
	Additional Charges	Description	Unit	Price Per Unit		Subtotal
	Copper Tube	1/4"x 1/2"	13 ft	P 400.00 / ft	P	5,200.00
	Royal Cord	2.mm2 x 4C	18 ft	P 100.00 / ft	P	1,800.00
	Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P 60.00 / ft	P	300.00
	Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P	1,000.00
	PVC(Drainline)	blue-3/4 inch	1 pc(s)	P 150.00 / pc	P	150.00
					P	8,450.00

Estimated Charges	P 16,950.00
--------------------------	--------------------


SHOWROOM AREA	Area ≈ 126 sq.m
---------------	-----------------

ACU 2	7.0HP FLOORMOUNTED INVERTER	KL-IF60-G6H1M32				
	Estimated Pipe Length :	23	ft			
	Estimated Royal Cord Length :	30	ft			
	Initial Charge				P	14,000.00
	Includes:					
	Labor					
	10ft Copper Tube					
	10ft Royal Cord					
	Other Consumables					
	Additional Charges	Description	Unit	Price Per Unit		Subtotal
	Copper Tube	3/8"x 5/8"	13 ft	P 400.00 / ft	P	5,200.00
	Royal Cord	2.mm2 x 4C	20 ft	P 100.00 / ft	P	2,000.00
	Royal Cord (ODU-Breaker)	5.5mm2 x 3C	5 ft	P 70.00 / ft	P	350.00
	Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P	1,000.00
	PVC(Drainline)	blue-1 inch	2 pc(s)	P 200.00 / pc	P	400.00
	Outdoor Bracket(floor)	fabricated	1 pc(s)	P 2,500.00 / pc	P	2,500.00
					P	11,450.00

Estimated Charges	P 25,450.00
--------------------------	--------------------

ACU 3	7.0HP FLOORMOUNTED INVERTER	KL-IF60-G6H1M32				
	Estimated Pipe Length :	40	ft			
	Estimated Royal Cord Length :	47	ft			
	Initial Charge				P	14,000.00
	Includes:					
	Labor					
	10ft Copper Tube					
	10ft Royal Cord					
	Other Consumables					
	Additional Charges	Description	Unit	Price Per Unit		Subtotal
	Copper Tube	3/8"x 5/8"	30 ft	P 400.00 / ft	P	12,000.00
	Royal Cord	2.mm2 x 4C	37 ft	P 100.00 / ft	P	3,700.00
	Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft	P 70.00 / ft	P	490.00
	Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P	1,000.00
	Rubber Insulation	2 1/8"x3/4" x 6	5 pc(s)	P 350.00 / pc	P	1,750.00
	PVC(Drainline)	blue-1 inch	2 pc(s)	P 200.00 / pc	P	400.00
	Outdoor Bracket(wall)	fabricated	1 pc(s)	P 5,000.00 / pc	P	5,000.00
	Scaffoldings	4sets	1 pc(s)	P 1,500.00 / pc	P	1,500.00
					P	25,840.00

Estimated Charges	P 39,840.00
--------------------------	--------------------

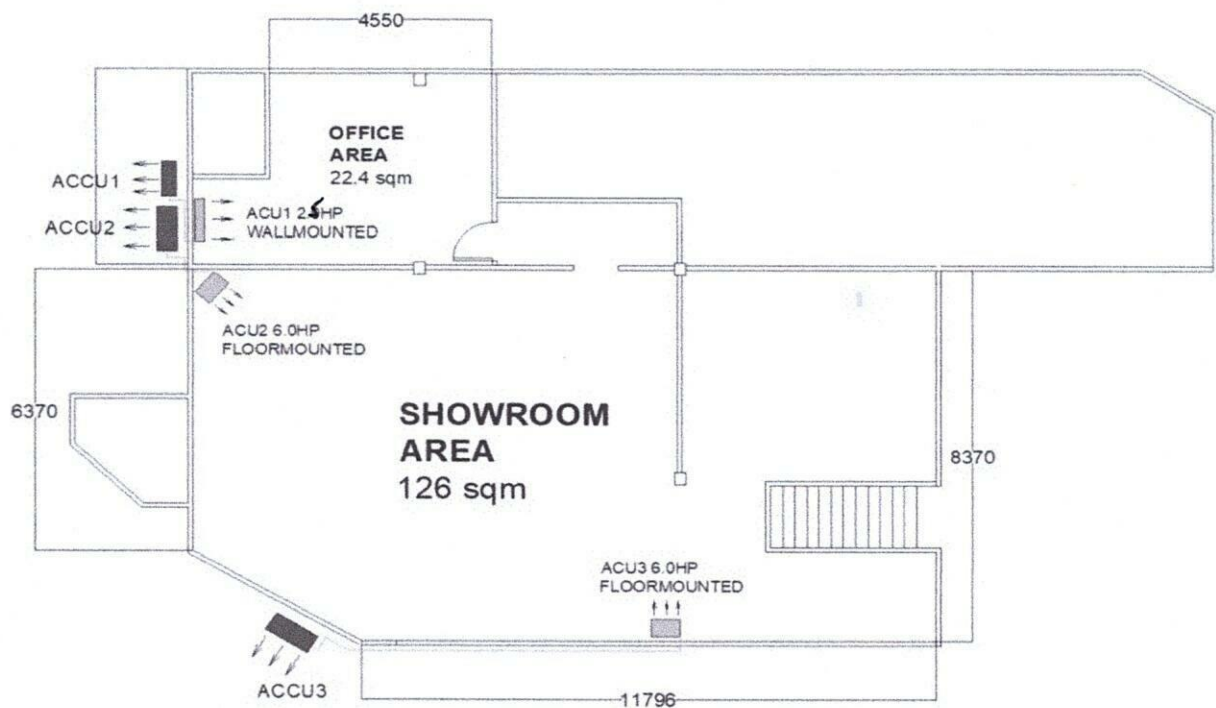

Total Estimated Charges

P 82,240.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Note:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for marking and site visit before installation. onsite fabricated bracket.
- 4 Coppertube expose going inside the ceiling, customer make a manhole in the ceiling.
- 5 Working days: Monday to Saturday, 8am- 5pm with parking. 6 pax
- 6 Mechanical Plans, Permits, Electrical permits not included.
- 7 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 8 Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , is not included in the scope of work of Kolin.
- 9 Final charges will be based on actual installation.

Prepared by:

Jeffrey Dadios
Field Surveyor

Customer Conformer:

Signature Over Printed Name

Reviewed by:

Engr. Kenneth Zamora
Service Supervisor
Field and Shop Operation