



February 2, 2026

FANTASTIC GOOD FOOD, INC.
UNIT 31F, 8 WACK WACK CONDOMINIUM, 8 WACK WACK ROAD, MANDALUYONG CITY
ATTN: MR. KELVIN PETER YU
TEL#: 0917-3080428

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

* OPTION 1 *

Table with 7 columns: QTY, U/M, MODEL / DESCRIPTION, SRP, DISCOUNTED PRICE, and AMOUNT. Includes details for Kolin Wall Mounted Certus AI Series Airconditioner and total estimated cost of 36,796.20.

* OPTION 2 *

Table with 7 columns: QTY, U/M, MODEL / DESCRIPTION, SRP, DISCOUNTED PRICE, and AMOUNT. Includes details for Kolin Wall Mounted Primus Gold Airconditioner and total estimated cost of 48,912.20.

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

BANK DETAILS:

- * Unit/s & Delivery: Account Name - KOLIN MARKETING INC. / Account# - 011808002307 (BDO-KALAYAAN)
* Installation: Will be provided by assigned installer.
** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: *** Need to sign waiver agreement due to under capacity of unit choice.

- PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.
PRICES IS VAT INCLUSIVE.
** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (Final charges will be based on actual works).

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.
If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted By:
MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:
MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-02-26-0054
REG-24%/6.5K/7K

Conforme:
SIGNATURE OVER PRINTED NAME



KOLIN Philippines International Inc.
Survey Form

No 003723

Customer Name : FANTASTIC FOODS FOOD INC. Date : 1-23-22
 Address : WILLIAMS ST. PARRISH VILLAGE CENTER, WALKER HILL RD. CANTON, MISSISSIPPI 39001 SJR No. : 171181
 Establishment Type : Residential Area Surveyed : LMPU 011112
 Commercial Area Surveyed : _____

Recommended Product Model : KS-1W20-MCX11201M32 (2 UNIT)

Cooling Capacity Computation

Floor Area : 50 sqm.
 Ceiling Height : 2.8 mtr. note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed.

Floor Area :	<u>50</u>	x	550 Btu/h	<u>27500</u> Btu/h
Ceiling Height (excess of 3 mtrs.) :	_____	x	20%	_____ Btu/h
Window Direct Sunlight	_____	x	20% - 50%	_____ Btu/h
Total Cooling Capacity				<u>27500</u> Btu/h

Add : Additional Heat Load

No. of Person	<u>15</u>	x	300 Btu/h	<u>4500</u> Btu/h
No. of Ordinary Light (<40w)	<u>12</u>	x	200 Btu/h	<u>2400</u> Btu/h
No. of Special Light (>40w)	_____	x	400 Btu/h	_____ Btu/h
No. of Refrigerator (< 6 cu.ft.)	_____	x	400 Btu/h	_____ Btu/h
No. of Refrigerator (> 6 cu.ft.)	_____	x	800 Btu/h	_____ Btu/h
No. of Cooking Range	_____	x	1500 Btu/h	_____ Btu/h
No. of Laptop Computer	_____	x	150 Btu/h	_____ Btu/h
No. of Desktop Computer <u>1</u>	<u>1</u>	x	400 Btu/h	<u>400</u> Btu/h
No. of Printer	_____	x	500 Btu/h	_____ Btu/h
No. of Photocopier	_____	x	1000 Btu/h	_____ Btu/h
Total Cooling Capacity				<u>7300</u> Btu/h

Recommended Cooling Capacity 38
34,800 Btu/h

Note : Compressor warranty will be reduced to 1 yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.

Scope of Work Agreement

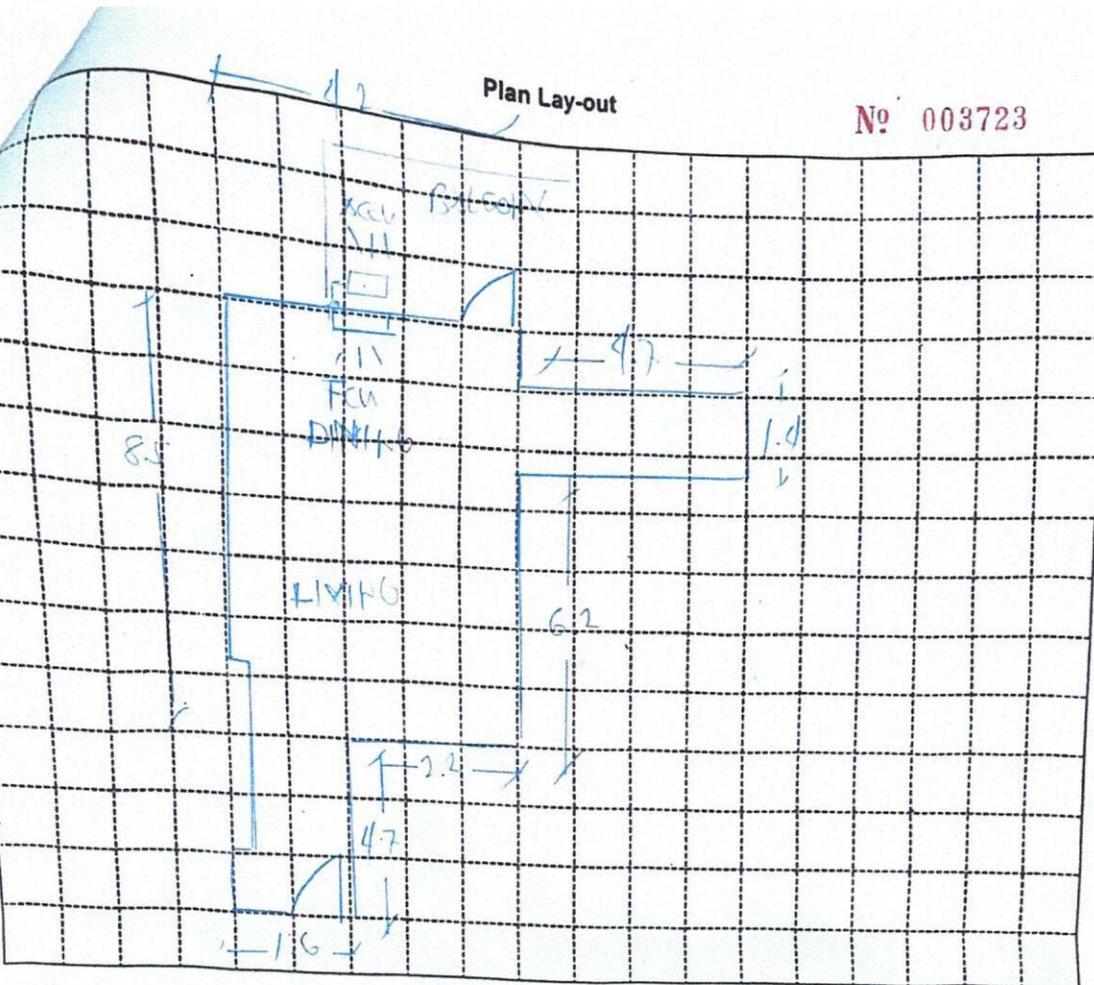
- | | | |
|-----------------------------------|--|--|
| 1. Copper tube lay-out | <input checked="" type="checkbox"/> Expose | <input type="checkbox"/> Embedded |
| 2. Chipping | <input type="checkbox"/> Included | <input checked="" type="checkbox"/> Not Included |
| 3. Fabricated Bracket | <input type="checkbox"/> Yes <input type="checkbox"/> Shop | <input type="checkbox"/> Site <input checked="" type="checkbox"/> No |
| 4. Service Ledge | <input type="checkbox"/> Yes | <input checked="" type="checkbox"/> No |
| 5. Dismantling of existing Aircon | <input type="checkbox"/> Included | <input checked="" type="checkbox"/> Not Included |
| 6. Ducting | <input type="checkbox"/> Yes | <input checked="" type="checkbox"/> No |

- Dimension : _____
- Plastering, carpentry and restoration works are to be done by the customer.
 - Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
 - Processing of mechanical plan, working permit, electrical permit are to be done by the customer.

10. Other concern; NEED TO CUT THE PLYWOOD LOCATING LOWVOLT. CUT A LITTLE OF ALUMINUM TO FIT THE UNIT COMPATIBLE. NEED WORKING PERMIT. CUSTOMER PURCHASE 1 UNIT ONLY NEED WORKER DUE TO UNEXPECTEDLY.

Plan Lay-out

Nº 003723



Indoor Unit Location : LEFT SIDE OF WINDOW UP
 Outdoor Unit Location : AT THE BALCONY FLOOR
 Pipe Length : 10 FT
 Special Note : _____

Installation Cost Estimate			
Material Description	Qty.	Unit Cost	Total Cost
Copper Tube (excess of 10 ft.)	2330, 2430, 2520, 3520, 4620		
Wire (Royal Cord-signal wire) (excess of 10ft.)	2.0mmx4C	5 FT	500
Wire (Royal Cord - Breaker to ODU)	3.5mm / 5.5mm x 3C	5 FT	300
Circuit Breaker	20A, 30A, 40A/1ph, 40A/3ph	1	1000
Bracket (ODU)	(Imptd.) Fabricated: (Floor / Wall)		
Bracket (WAC)	Angle Type		
PVC Pipe (drain)	1/2", 3/4"	1	150
PVC Pipe (electrical)	3/4", 1"		
Drain Pump			
Drain Pump Hose	WHITE 1/2"	10 FT	350
Chipping Works	mtr.		
Dismantling Fee (existing air-conditioner)			
Initial Charge			7500
TOTAL ESTIMATE			P 9,800 -

Note :
 1. Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials.
 2. Survey fee will be deducted in the installation fee.

Prepared by:

 Signature Over Printed Name

REVIEWED BY:

 ENGR. ADRIAN NOGOY
 PROJECT ENGINEER-KPII

Customer Conforme:

 Signature Over Printed Name 1/23/26

JANUARY 23, 2026
 FANTASTIC GOOD FOOD INC
 Unit 31F 8 Wack Wack Condo, Wack Wack Rd. Greenhills Mandaluyong City
 0917-3080428

Please be informed that the air-conditioner you intend to purchase is under capacity as compared to the following unit that we proposed:

Location	Area	Kolin's Recommendation	Customer's Choice	Remarks
LIVING, DINING	50 sqm	KS-IW20-MCAI1201M32 2 UNITS	KS-IW20-MCAI1201M32 1 UNIT	Calculated 3.8hp under by 1.8hp

Since the unit of your choice is under capacity, it is probable that you may experience the following;

1. Capacity of the unit to cool the area will take longer or it will not cool the area at all that may lead to your dissatisfaction with the cooling performance of our unit.
2. Power consumption will be higher due to frequent running of compressor for not reaching the desired temperature within the normal parameter.
3. Useful life of compressor will be shortened due to excessive running beyond the normal run cycle.


Considering the above conditions, we regret to inform you that we cannot guarantee the efficient performance of unit. **Also, One (1) year warranty for parts (compressor-1year).**

For your guidance and information


Prepared by:

Name
 Surveyor

Approved by:

 1/26/26
 Mr. Alvin de Rivera
 Assistant Service Manager

Noted by:

 01-26-2026
 Engr. Adrian Nogoy
 Project Engineer

Customer Conforme:

Signature Over Printed Name