



February 4, 2026

MR. KELVIN OR
3R1 HIGH ST. GRACE VILLAGE, BRGY. APOLONIO, SAMSON QUEZON CITY
TEL#: 0933-3733776

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSG-IWF-30Wfy-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	51,212.20	PHP	51,212.20
TOTAL UNIT COST					PHP	51,212.20
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	13,925.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	65,737.20

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

BANK DETAILS:

* Unit/s & Delivery: Account Name - KOLIN MARKETING INC. / Account# - 011808002307 (BDO-KALAYAAN)

* Installation: Will be provided by assigned installer.

** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (Final charges will be based on actual works).

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted By:
MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:
MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-02-26-0061
LCY-24%/7K

Conforme: _____
SIGNATURE OVER PRINTED NAME



Customer Name : KEVIN ORT Date : 2-3-26
 Address : 341 HILL ST. GARCIA VILLAGE, TAGAYtay CITY SJR No. : 2858

Establishment Type : Residential Area Surveyed : _____
 Commercial Area Surveyed : Classroom

Recommended Product Model : KSC-1W1-30WTR-2K1M92

Cooling Capacity Computation

Floor Area : 25 sqm.
 Ceiling Height : 2.7 mtr.
 note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed.

Floor Area :	<u>25</u>	x	550 Btu/h	<u>13,750</u> Btu/h
Ceiling Height (excess of 3 mtrs.) :		x	20%	
Window Direct Sunlight		x	20% - 50%	
Total Cooling Capacity				<u>13,750</u> Btu/h

Add : Additional Heat Load

No. of Person	<u>35</u>	x	300 Btu/h	<u>10,500</u> Btu/h
No. of Ordinary Light (<40w)	<u>5</u>	x	200 Btu/h	<u>1,000</u> Btu/h
No. of Special Light (>40w)		x	400 Btu/h	
No. of Refrigerator (< 6 cu.ft.)		x	400 Btu/h	
No. of Refrigerator (> 6 cu.ft.)		x	800 Btu/h	
No. of Cooking Range		x	1500 Btu/h	
No. of Laptop Computer	<u>1</u>	x	150 Btu/h	<u>150</u> Btu/h
No. of Desktop Computer	<u>1</u>	x	400 Btu/h	<u>400</u> Btu/h
No. of Printer	<u>1</u>	x	500 Btu/h	<u>500</u> Btu/h
No. of Photocopier		x	1000 Btu/h	
Total Cooling Capacity				<u>12,500</u> Btu/h
Recommended Cooling Capacity				<u>16,300</u> Btu/h

Note : Compressor warranty will be reduced to ___ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.

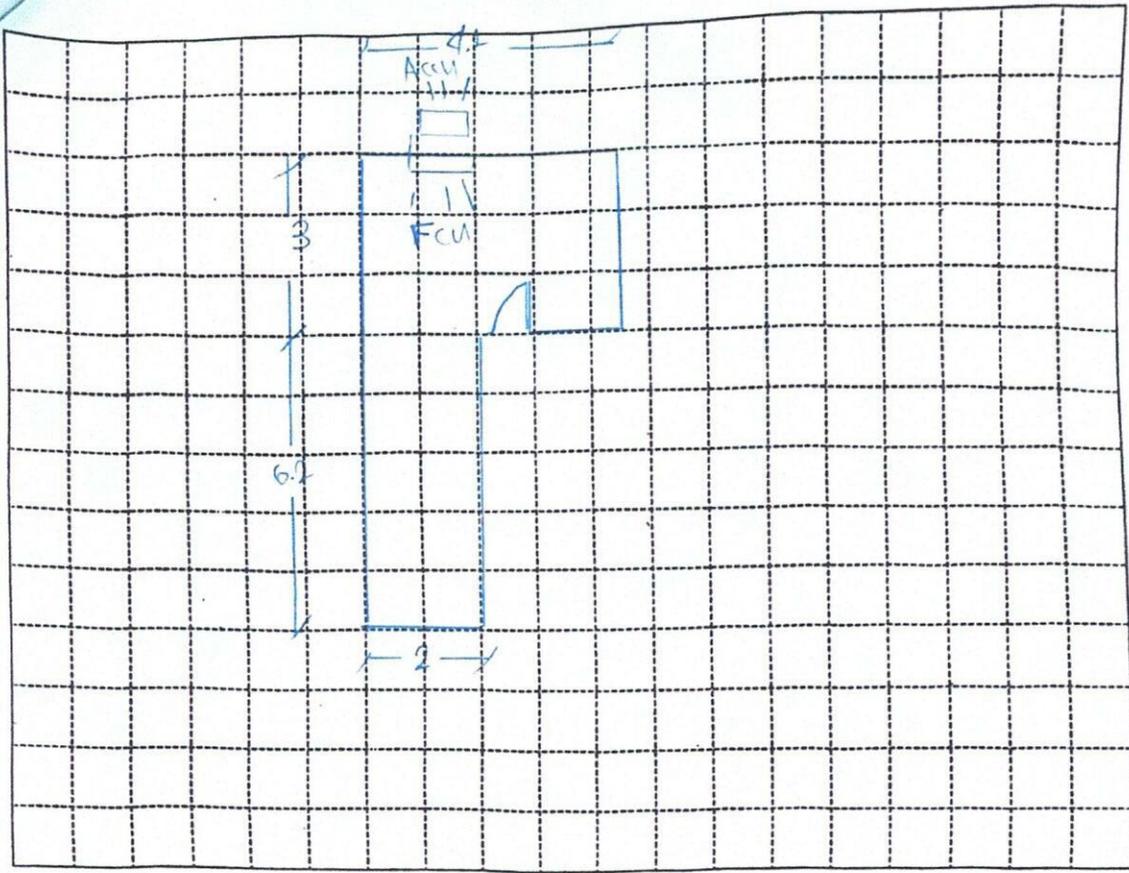
Scope of Work Agreement

- 1. Copper tube lay-out Expose Embedded
- 2. Chipping Included Not Included
- 3. Fabricated Bracket Yes Shop Site No
- 4. Service Ledge Yes No
- 5. Dismantling of existing Aircon Included Not Included
- 6. Ducting Yes No

Dimension : _____

- 7. Plastering, carpentry and restoration works are to be done by the customer.
- 8. Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
- 9. Processing of mechanical plan, working permit, electrical permit are to be done by the customer.


10. Other concern: DISMANTLE AND REPLACE CAPILLARIES, COMMUNICATION WIRE AND WATS. USE EXISTING OUTDOOR BLENDER, BATH ROPE AND HATCHES.




Indoor Unit Location : LEFT OF WALL SAME LOCATION OF EXISTING
 Outdoor Unit Location : AT THE BACK SAME LOCATION
 Pipe Length : 14 FT
 Special Note : _____

Installation Cost Estimate			
Material Description	Qty.	Unit Cost	Total Cost
Copper Tube (excess of 10 ft.)	2330, 2430, 2520, 3520, 4620	4 FT	1600
Wire (Royal Cord-signal wire) (excess of 10ft.)	2.0mmx4C	9 FT	900
Wire (Royal Cord - Breaker to ODU)	3.5mm / 5.5mm x 3C	5 FT	300
Circuit Breaker	20A, 30A, 40A/1ph, 40A/3ph		
Bracket (ODU)	(Imptd. / Fabricated) : (Floor / Wall)		
Bracket (WAC)	Angle Type		
PVC Pipe (drain)	1/2", 3/4"		
PVC Pipe (electrical)	3/4", 1"		
Drain Pump			
Drain Pump Hose	WHITE 1/2"	5 FT	125
Chipping Works	mlr.		
Dismantling Fee (existing air-conditioner)	2.0 FT	1	2500
Initial Charge			8500
TOTAL ESTIMATE		P 13,925 -	

- Note :
1. Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, C Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials.
 2. Survey fee will be deducted in the installation fee.

Prepared by:

 Signature Over Printed Name

REVIEWED BY:

 02/03/2026
 ENGR. ADRIAN NOGOY
 PROJECT ENGINEER-KPII

Customer Conforme:

 Signature Over Printed Name