



February 23, 2026

MR. KENDRICK RYAN CHUA
21 TAFT ST. WEST GREENHILLS, SAN JUAN
TEL#: 0917-9366152

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION - GAZEBO/GYM

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSG-IWF-30WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	49,680.30 1	PHP	49,680.30
TOTAL UNIT COST					PHP	49,680.30
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	10,625.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	60,305.30

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

BANK DETAILS:

- * Unit/s: Account Name - KOLIN MARKETING INC. / Account# - 011808002307 (BDO-KALAYAAN)
- * Installation: Will be provided by assigned installer.
- ** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.


PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph


Very Truly Yours,


JANELLEN S. LIM
KMI-ASSISTANT

Noted By:


MARTINA DANIEL R. FLORES
KMI-SUPERVISOR

Approved By:


MS. EDITHA M. FLORES
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

KMI-QUOTE-02-26-0085
BOD-26%/7K

Kolin Marketing, Inc.
1854 Sta. Rita St., Guadalupe Nuevo, Makati City
Tel.: (632) 8852-6473
Fax: (632) 8852-2170 / (632) 8852-4792
 www.kolinphil.com.ph / kolinphilippines



**KOLIN Philippines International Inc.
Survey Form**

No. 003733

Customer Name: KENDRICK PAXON CHUA Date: 6-4-16
 Address: 1178 FT. ST. WEST GREENHILLS, SAN JOSE SJR No.: 91124

Establishment Type: Residential Area Surveyed: 6x7.80 / 64M
 Commercial Area Surveyed: _____

Recommended Product Model: K56-1WF-30WY-81A/M32

Cooling Capacity Computation

Floor Area: 29 sqm.
 Ceiling Height: _____ mtr. note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed.

Floor Area :	<u>29</u>	x	550 Btu/h	<u>15,950</u> Btu/h
Ceiling Height (excess of 3 mtrs.) :	_____	x	20%	_____ Btu/h
Window Direct Sunlight	_____	x	40% 50%	<u>6,380</u> Btu/h
Total Cooling Capacity				<u>22,330</u> Btu/h

Add : Additional Heat Load

No. of Person	<u>5</u>	x	300 Btu/h	<u>1,500</u> Btu/h
No. of Ordinary Light (<40w)	<u>5</u>	x	200 Btu/h	<u>1,000</u> Btu/h
No. of Special Light (>40w)	_____	x	400 Btu/h	_____ Btu/h
No. of Refrigerator (< 6 cu.ft.)	_____	x	400 Btu/h	_____ Btu/h
No. of Refrigerator (> 6 cu.ft.)	_____	x	800 Btu/h	_____ Btu/h
No. of Cooking Range	_____	x	1500 Btu/h	_____ Btu/h
No. of Laptop Computer	_____	x	150 Btu/h	_____ Btu/h
No. of Desktop Computer PC	<u>1</u>	x	400 Btu/h	<u>400</u> Btu/h
No. of Printer	_____	x	500 Btu/h	_____ Btu/h
No. of Photocopier	_____	x	1000 Btu/h	_____ Btu/h
Total Cooling Capacity				<u>2,900</u> Btu/h
Recommended Cooling Capacity				<u>2.8</u> <u>25,230</u> Btu/h

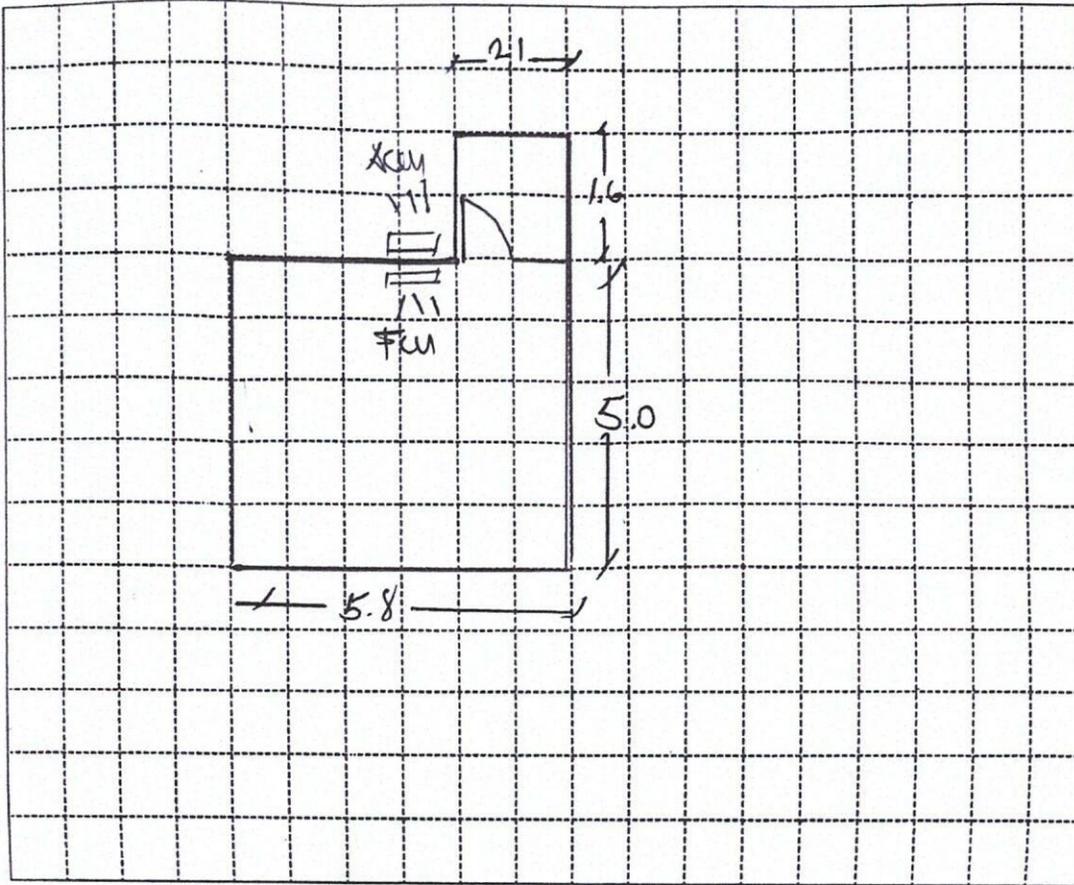
Note : Compressor warranty will be reduced to _____ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.

Scope of Work Agreement

- | | | |
|-----------------------------------|--|--|
| 1. Copper tube lay-out | <input checked="" type="checkbox"/> Expose | <input type="checkbox"/> Embedded |
| 2. Chipping | <input type="checkbox"/> Included | <input checked="" type="checkbox"/> Not Included |
| 3. Fabricated Bracket | <input type="checkbox"/> Yes <input type="checkbox"/> Shop | <input type="checkbox"/> Site <input checked="" type="checkbox"/> No |
| 4. Service Ledge | <input type="checkbox"/> Yes | <input checked="" type="checkbox"/> No |
| 5. Dismantling of existing Aircon | <input type="checkbox"/> Included | <input checked="" type="checkbox"/> Not Included |
| 6. Ducting | <input type="checkbox"/> Yes | <input checked="" type="checkbox"/> No |

Dimension : _____

7. Plastering, carpentry and restoration works are to be done by the customer.
8. Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
9. Processing of mechanical plan, working permit, electrical permit are to be done by the customer.
10. Other concern; CUSTOMER NEED TO PROVIDE POWER SUPPLY AT THE OUTDOOR LOCATION / METER.
EXPOSE COPPER TUBES OUTSIDE THE WALL.



Indoor Unit Location : CENTER OF AREA, NEAR OF DOOR
 Outdoor Unit Location : XTHE BXC
 Pipe Length : 10 FT
 Special Note : _____

Installation Cost Estimate			
Material Description	Qty.	Unit Cost	Total Cost
Copper Tube (excess of 10 ft.)	2330, 2430, 2520, <u>3520</u> , 4620		
Wire (Royal Cord-signal wire) (excess of 10ft.)	2.0mmx4C	<u>5 FT</u>	100
Wire (Royal Cord - Breaker to ODU)	<u>3.5mm</u> 5.5mm x 3C	<u>5 FT</u>	60
Circuit Breaker	20A, <u>30A</u> 40A/1ph, 40A/3ph	1	1000
Bracket (ODU)	<u>Impld. Fabricated</u> ; (Floor/Wall)	1	1000
Bracket (WAC)	Angle Type		
PVC Pipe (drain)	<u>1/2", 3/4"</u>	1	150
PVC Pipe (electrical)	<u>3/4", 1"</u>		
Drain Pump			
Drain Pump Hose	<u>White</u>	<u>7 FT</u>	75
Chipping Works	mtr.		
Dismantling Fee (existing air-conditioner)			
Initial Charge			8166 -
TOTAL ESTIMATE			P 10,625 -

- Note :
- Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials.
 - Survey fee will be **deducted** in the installation fee.

Prepared by:

 Signature Over Printed Name

Customer Conforme:
 Signature Over Printed Name

REVIEWED BY:

 02/21/2024
 ENGR. ADRIAN NCOY
 PROJECT ENGINEER - KPII