



February 18, 2026

MS. CRISTINA ROCES CHANCO
B2 L4 ST. VISTA VERDE EXECUTIVE VILLAGE, PHASE 8 BRGY. CAINTA RIZAL
TEL#: 0917-8852202

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSG-IWF-30Wfy-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	51,212.20	PHP	51,212.20
1	UNIT/S	MODEL: KS-IW15-MCAI1201M32 KOLIN WALL MOUNTED CERTUS A/ SERIES AIRCONDITIONER 12,880 Kj/h (1.5HP) FULL DC INVERTER W/ WIFI R-32	33,995.00	19,336.20	PHP	19,336.20
1	UNIT/S	MODEL: KS-IW10-MCAI1201M32 KOLIN WALL MOUNTED CERTUS A/ SERIES AIRCONDITIONER 9,800 Kj/h (1.0HP) FULL DC INVERTER W/ WIFI R-32	30,995.00	17,056.20	PHP	17,056.20
TOTAL UNIT COST					PHP	/ 87,604.60
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	/ 46,050.00
OTHERS: DELIVERY CHARGE					PHP	/ 600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	/ 134,254.60

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

BANK DETAILS:

- ** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.
- * Unit/s & Delivery: Account Name - KOLIN MARKETING INC. / Account# - 011808002307 (BDO-KALAYAAN)
- * Installation: Will be provided by assigned installer.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: ***** Need to sign waiver agreement due to under capacity of unit choice.**

PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted By:

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-02-26-0076-rev
OMF-24%/7K/6.5K

Conforme: _____
SIGNATURE OVER PRINTED NAME



FEBRUARY 16, 2026

CRISTINA ROCES CHANCO

B2 L4 Victoria St. Vista Verde Executive Village Phase8 Brgy Cainta Rizal

0917-8852202

KSG-IWF-30WFY-8K1M32	1
KS-IW15-MCAI1201M32	1
KS-IW10-MCAI1201M32	1

REV1

GROUND FLOOR- CUSTOMER CHOICE

LIVING/DINING/KITCHEN Area ≈ 60 sq.m

ACU 1	3.0hp Wallmounted Inverter		KSG-IWF-30WFY-8K1M32			
	Estimated Pipe Length	:	10	ft		
	Estimated Royal Cord Length	:	15	ft		
	Initial Charge				P	8,500.00
	Includes:					
	Labor					
	10ft Copper Tube					
	10ft Royal Cord					
	Outdoor Bracket (wall)					
	Other Consumables					
	Additional Charges	Description	Unit	Price Per Unit		Subtotal
	Royal Cord	2.mm2 x 4C	5 ft	P 100 / ft	P	500
	Royal Cord (ODU-Breaker)	5.0mm2 x 3C	7 ft	P 70 / ft	P	490
	Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	P 1,000 / pc	P	1,000
	PVC(Drainline)	blue - 3/4"	2 pc(s)	P 150 / pc	P	300
	Drain Hose	White -1/2"	7 ft	P 25 / ft	P	175 P
						<u>2,465.00</u>

Estimated Charges	P	10,965.00
--------------------------	----------	------------------

SECOND FLOOR

BEDROOM1 Area ≈ 13.7 sq.m

ACU 2	1.0hp Wallmounted Inverter		KS-IW10-MCAI1201M32			
	Estimated Pipe Length	:	14	ft		
	Estimated Royal Cord Length	:	19	ft		
	Initial Charge				P	7,500.00
	Includes:					
	Labor					
	10ft Copper Tube					
	10ft Royal Cord					
	Outdoor Bracket (wall)					
	Other Consumables					
	Additional Charges	Description	Unit	Price Per Unit		Subtotal
	Copper Tube	1/4"x 3/8"	4 ft	P 350 / ft	P	1,400
	Royal Cord	2.mm2 x 4C	9 ft	P 100 / ft	P	900
	Royal Cord (ODU-Breaker)	3.5mm2 x 3C	7 ft	P 60 / ft	P	420
	Circuit Breaker(NEMA)	20A/ 1Ph	1 pc(s)	P 1,000 / pc	P	1,000
	PVC(Drainline)	blue - 3/4"	2 pc(s)	P 150 / pc	P	300
	Drain Hose	White -1/2"	7 ft	P 25 / ft	P	175 P
						<u>4,195.00</u>

Estimated Charges	P	11,695.00
--------------------------	----------	------------------

BEDROOM2 Area ≈ 13.2 sq.m

ACU 3	1.0hp Wallmounted Inverter		Customer's unit			
	Estimated Pipe Length	:	14	ft		
	Estimated Royal Cord Length	:	19	ft		
	Initial Charge				P	7,500.00
	Includes:					
	Labor					
	10ft Copper Tube					
	10ft Royal Cord					
	Outdoor Bracket (wall)					
	Other Consumables					
	Additional Charges	Description	Unit	Price Per Unit		Subtotal
	Copper Tube	1/4"x 3/8"	4 ft	P 350 / ft	P	1,400
	Royal Cord	2.mm2 x 4C	9 ft	P 100 / ft	P	900
	Royal Cord (ODU-Breaker)	3.5mm2 x 3C	7 ft	P 60 / ft	P	420
	Circuit Breaker(NEMA)	20A/ 1Ph	1 pc(s)	P 1,000 / pc	P	1,000
	PVC(Drainline)	blue - 3/4"	2 pc(s)	P 150 / pc	P	300

Drain Hose White -1/2" 7 ft P 25 / ft P 175 P 4,195.00

Estimated Charges P 11,695.00

MASTER BEDROOM Area ≈ 15 sq.m

ACU 4 1.5hp Wallmounted Inverter *KS-IW15-MCAI1201M32*

Estimated Pipe Length : 14 ft
 Estimated Royal Cord Length : 19 ft
 Initial Charge P 7,500.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (wall)
- Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	1/4"x 3/8"	4 ft	P 350 / ft	P 1,400
Royal Cord	2.mm2 x 4C	9 ft	P 100 / ft	P 900
Royal Cord (ODU-Breaker)	3.5mm2 x 3C	7 ft	P 60 / ft	P 420
Circuit Breaker(NEMA)	20A/ 1Ph	1 pc(s)	P 1,000 / pc	P 1,000
PVC(Drainline)	blue - 3/4"	2 pc(s)	P 150 / pc	P 300
Drain Hose	White -1/2"	7 ft	P 25 / ft	P 175 P 4,195.00

Estimated Charges P 11,695.00

Total Estimated Charges P 46,050.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Note:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 Outdoor height not yet final, for site visit with installer and owner for final location and for markings.**
- 3 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 4 Working days: Monday to Saturday, 8am- 5pm with parking.
- 5 Mechanical Plans, Permits, Electrical permits not included.
- 6 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.**
- 7 Electrical power supply (feeder line) **230v/ 60hz/ 1ph**, is not included in the scope of work of Kolin.
- 8 Final charges will be based on actual installation.**

Prepared by:


Customer Conformer:

Jeffrey Dadios
Field Surveyor


Signature Over Printed Name

Reviewed by: 02/18/2026

Engr. Adrian E. Nogoy
Project Engineer

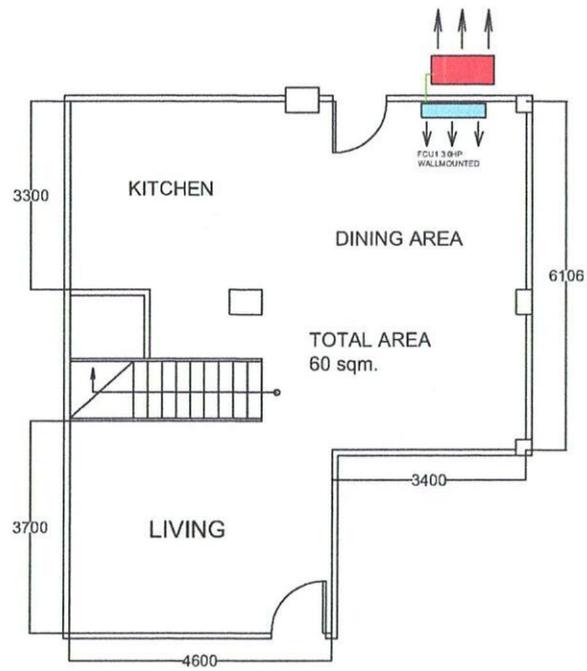

GROUND FLOOR

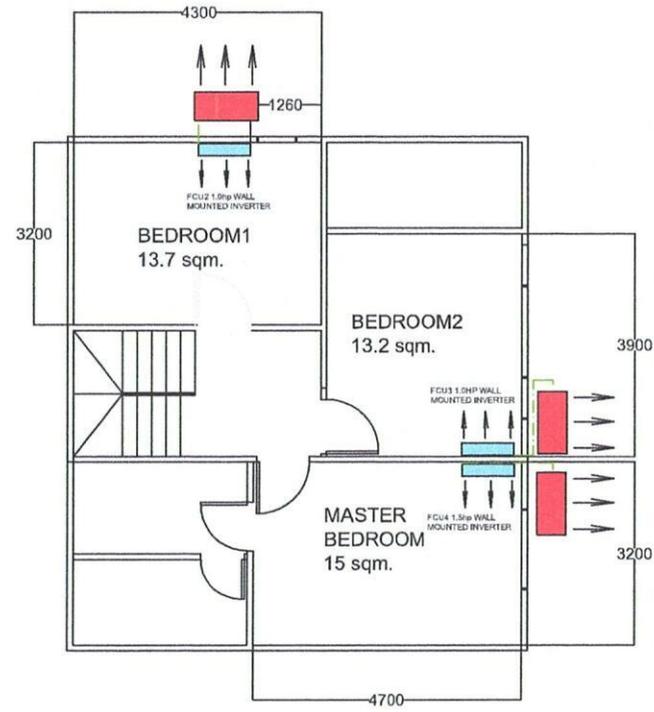

SECOND FLOOR



PROJECT TITLE:

PROJECT OWNER:

SHEET CONTENTS

SHEET NO.

PROJECT LOCATION:

B2 L4 Victoria St. Vista Verde Executive Village Phase8 Brgy Cainta Rizal

CHRISTINA CHANCO

AC SYSTEM LAYOUT OF GF & 2F

A

01

01

DRAWN BY : JD

CHECKED BY : AN

PROJ NO.

FEBRUARY 16, 2026

CRISTINA ROCES CHANCO

B2 L4 Victoria St. Vista Verde Executive Village Phase8 Brgy Cainta Rizal

0917-8852202

Please be informed that the air-conditioner you intend to purchase is under capacity as compared to the following unit that we proposed:

Area	Kolin's Recommendation	Customer's Choice	Remarks
LIVING , DINING ,KITCHEN	KL-IF60-6H1M32	KSG-IWF-30WFY-8K1M32	Calculated 4.7hp
			Under by 1.7hp

Since the unit of your choice is under capacity, it is probable that you may experience the following;

1. Capacity of the unit to cool the area will take longer or it will not cool the area at all that may lead to your dissatisfaction with the cooling performance of our unit.
2. Power consumption will be higher due to frequent running of compressor for not reaching the desired temperature within the normal parameter.
3. Useful life of compressor will be shortened due to excessive running beyond the normal run cycle.

Considering the above conditions, we regret to inform you that we cannot guarantee the efficient performance of unit. **Also, One (1) year warranty for parts with the compressor warranty voided.**


For your guidance and information

Prepared by:




Jeffrey Dadios
Surveyor

Noted by:


02/18/2026

Engr. Adrian E. Nogoy
Project Engineer

Approved by:

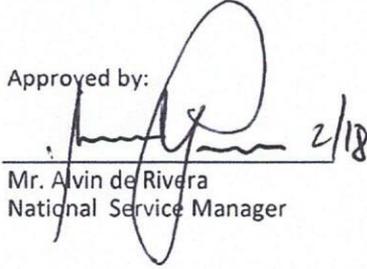

Mr. Alvin de Rivera
National Service Manager

Customer Conforme:

Signature Over Printed Name