



February 27, 2026

MS. JOVELYN SY LEE
U-16B BEVERLY CONDO, ANNAPOLIS ST. BRGY. GREENHILLS, SAN JUAN CITY
TEL#: 0922-6921579

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION - **OPTION 1**

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSG-IWF-30WYF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	51,212.20	PHP	51,212.20
1	UNIT/S	MODEL: KAG-200WCINV KOLIN WINDOW TYPE QUAD SERIES AIRCONDITIONER 19,080 Kj/h (2.0HP) FULL DC INVERTER W/ WIFI R-32 (WxDxH) 26"x28"x17"	43,595.00	31,332.20	PHP	31,332.20
2	UNIT/S	MODEL: KAG-145WCINV KOLIN WINDOW TYPE QUAD SERIES AIRCONDITIONER 13,210 Kj/h (1.5HP) FULL DC INVERTER W/ WIFI R-32 (WxDxH) 22"x28"x15"	32,995.00	23,776.20	PHP	47,552.40
TOTAL UNIT COST					PHP	130,096.80
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	22,395.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	153,091.80

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

BANK DETAILS:

* Unit/s & Delivery: Account Name - KOLIN MARKETING INC. / Account# - 011808002307 (BDO-KALAYAAN)

* Installation: Will be provided by assigned installer.

** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

FOR WINDOW TYPE: ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB, TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: *** Need to sign waiver agreement due to under capacity of unit choice.

PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Please be informed that there will be price increase starting March 1, 2026. Kindly inquire for updated price before placing purchase order.

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted By:
MARIA MANUEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

KMI-QUOTE-02-26-0096
MMC-24%/7K/1.8K/1.3K

Kolin Marketing, Inc.
1854 Sta. Rita St., Guadalupe Nuevo, Makati City
Tel.: (632) 8852-6473
Fax: (632) 8852-2170 / (632) 8852-4792
www.kolinphil.com.ph / kolinphilippines



FEBRUARY 26, 2026
 JOVELYN SY LEE
 U-16B Beverly Condo, Annapolis St. Brgy. GreenHills, San Juan City
 0922-6921579

MODEL	Qty
KSG-IWF-30Wfy8K1M32	1
KAG-200WCINV	1
KAG-145WCINV	2

LIVING, DINING, KITCHEN, HALLWAY		Area	60 sqm
----------------------------------	--	------	--------

ACU 1	3.0 HP Wall Mounted Inverter	KSG-IWF-30Wfy8K1M32			
	Estimated Pipe Length = 20 ft				
	Estimated Royal Cord Length = 25 ft				
	Initial Charge				P 8,500.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (WALL)				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Copper Tube	Ø 1/4" x Ø 5/8"	10 ft	P 400.00/ft	P 4,000.00
	Royal Cord (comm. wire)	2.0mm2 x 4C	15 ft	P 100.00/ft	P 1,500.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	P 60.00/ft	P 420.00
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	P 1,000.00/pc	P 1,000.00
	PVC (Drilline)	blue- 3/4"	1 pc/s	P 150.00/pc	P 150.00
	Dismantle	2.5hp- outdoor only	1 set	P 1,250.00/set	P 1,250.00
	Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
					P 8,495.00
	Estimated Charges				P 16,995.00

GUESTROOM		Area	14.7 sqm
-----------	--	------	----------

ACU 2	1.5 HP Window type Inverter	KAG-145WCINV			
	Initial Charge				P 1,200.00
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Window Bracket	Angle Bracket	1 pc/s	P 600.00/pc	P 600.00
					P 600.00
	Estimated Charges				P 1,800.00

OFFICE		Area	12.7 sqm
--------	--	------	----------

ACU 3	1.5 HP Window type Inverter	KAG-145WCINV			
	Initial Charge				P 1,200.00
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Window Bracket	Angle Bracket	1 pc/s	P 600.00/pc	P 600.00
					P 600.00
	Estimated Charges				P 1,800.00

MASTER BEDROOM		Area	19.6 sqm
----------------	--	------	----------

ACU 4	2.0 HP Window type Inverter	KAG-200WCINV			
	Initial Charge				P 1,200.00
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Window Bracket	Angle Bracket	1 pc/s	P 600.00/pc	P 600.00
					P 600.00
	Estimated Charges				P 1,800.00


Total Estimated Charges	P 22,395.00
-------------------------	-------------

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for site visit for the final location of indoor unit. ACU1 need waiver due to undercapacity.**
- 4 Bring plywood for indoor Backing. Expose Coppertube in the area.
- 5 Need to cover the windowtype side of unit. Carpentry works.
- 6 KAG-145WCINV Dimension: W x D x H, = 560 X 708 x 375 mm. (22 x 28 x 15 inches)
- 7 KAG-200WCINV Dimension: W x D x H, = 660 X 700 x 428 mm. (26 x 28 x 17 inches)
- 8 Working days: Monday to Saturday, 8am- 5pm parking for confirmation. Need working permit.
- 9 Mechanical Plans, Permits, Electrical permits not included.
- 10 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 11 Air conditioning drain line and Electrical power supply (feeder line) **230v/ 60hz/ 1ph** should be provided by customer's contractor.
- 12 Final charges will be based on actual installation.**


Prepared by:

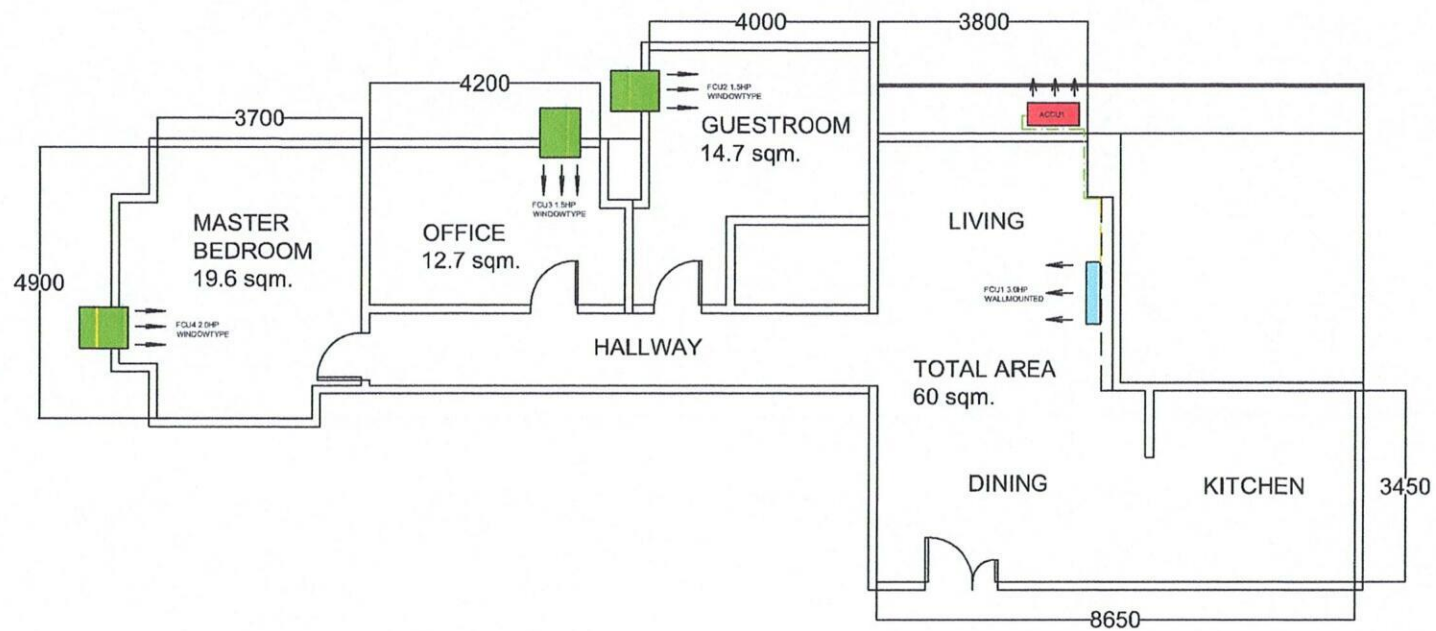

Jeffrey Dadios
Field Surveyor

Customer Conformance:

Signature Over Printed Name

Reviewed by:


02/27/2026
Engr. Adrian E. Nogoy
Project Engineer



PROJECT TITLE:

AIR CONDITIONING SYSTEM – RESIDENTIAL INSTALLATION

PROJECT LOCATION:

U-16B Beverly Condo, Annapolis St. Brgy. GreenHills, San Juan City

PROJECT OWNER:

JOVELYN SY LEE

SHEET CONTENTS

AC SYSTEM LAYOUT

DRAWN BY : JD

CHECKED BY : AN

SHEET NO.

A

01

01

PROJ NO.

FEBRUARY 26, 2026
JOVELYN SY LEE
U-16B Beverly Condo, Annapolis St. Brgy. GreenHills, San Juan City
0922-6921579

Please be informed that the air-conditioner you intend to purchase is under capacity as compared to the following unit that we proposed:

Location	Area	Kolin's Recommendation	Customer's Choice	Remarks
LIVING DINING KITCHEN HALLWAY	60 sqm	KL-IF60-G6HIM32	KSG-IWF-30WFFY8K1M32	Calculated 4.4hp under by 1.4hp


Since the unit of your choice is under capacity, it is probable that you may experience the following;

1. Capacity of the unit to cool the area will take longer or it will not cool the area at all that may lead to your dissatisfaction with the cooling performance of our unit.
2. Power consumption will be higher due to frequent running of compressor for not reaching the desired temperature within the normal parameter.
3. Useful life of compressor will be shortened due to excessive running beyond the normal run cycle.

Considering the above conditions, we regret to inform you that we cannot guarantee the efficient performance of unit. **Also, One (1) year warranty for parts (compressor-VOID).**

For your guidance and information

Prepared by:



Jeffrey T. Dadios
Surveyor

Approved by:


Mr. Alvin de Rivera
Service Manager

2/27/26

Noted by:


Engr. Adrian E. Nogoy
Project Engineer

02/27/2026

Customer Conforme:

Signature Over Printed Name