



February 9, 2026

SUPREME CARE MEDICAL DIAGNOSTIC CENTER
92 CLAUDIO ST., BRGY. SAN JUAN, MORONG RIZAL
TEL#: 0917-5030232

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION - **OPTION 1**

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSG-IWF-20WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 19,000 Kj/h (2.0HP) FULL DC INVERTER W/ WIFI R-32	59,595.00	38,292.20	PHP	38,292.20
1	UNIT/S	MODEL: KSG-IWF-25WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	45,436.20	PHP	45,436.20
TOTAL UNIT COST					PHP	83,728.40
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	50,050.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	134,378.40

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

BANK DETAILS:

- ** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.
- * Unit/s & Delivery: Account Name - KOLIN MARKETING INC. / Account# - 011808002307 (BDO-KALAYAAN)
- * Installation: Will be provided by assigned installer.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (Final charges will be based on actual works).

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-02-26-0065
MMC-24%/7K

Conforme: _____
SIGNATURE OVER PRINTED NAME



JRA JERRICO

Refrigeration and Air-conditioning Services
 B4, 19 Felixvill, Mangahan, Sto. Niño Sibiran, Binangonan Rizal
 Email: jraairconditioning@gmail.com
 Contact Nos: 09267189004/09615215615

Survey Form

Customer Name: Supreme Care Medical Diagnostic and Imaging Date: 2/4/20
 Address: 92 Claudio St. Brgy. San Juan Morong Rizal SJR No: HO-00289507

Establishment Type: Residential Area Surveyed: _____
 Commercial Area Surveyed: Scan room waiting area

Recommended Product Model: KSG-WF-20 WFY-8K1M32

Cooling Capacity Computation

Floor Area: 12.60 sqm
 Ceiling Height: 8.5 mtr.

note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed.

Floor Area:	<u>12.60</u>	x	550 Btu/h	<u>6930</u> Btu/h
Ceiling Height (excess of 3 mtrs.):	<u>1</u>	x	20%	<u>1390</u> Btu/h
Window Direct Sunlight		x	20% - 50%	<u>1790</u> Btu/h
Total Cooling Capacity				<u>9710</u> Btu/h

Add : Additional Heat Load

No. of Person	<u>4</u>	x	300 Btu/h	<u>1200</u> Btu/h
No. of Ordinary Light (<40w)	<u>8</u>	x	200 Btu/h	<u>1600</u> Btu/h
No. of Special Light (>40w)		x	400 Btu/h	
No. of Refrigerator (< 6 cu.ft.)		x	400 Btu/h	
No. of Refrigerator (> 6 cu.ft.)		x	800 Btu/h	
No. of Cooking Range		x	1500 Btu/h	
No. of Laptop Computer		x	150 Btu/h	
No. of Desktop Computer		x	400 Btu/h	
No. of Printer		x	500 Btu/h	
No. of Photocopier		x	1000 Btu/h	
Total Cooling Capacity				<u>2800</u> Btu/h

Recommended Cooling Capacity

12510 Btu/h

Note : Compressor warranty will be reduced to ___ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.


Scope of Work Agreement

- | | | |
|-----------------------------------|--|--|
| 1. Copper tube lay-out | <input checked="" type="checkbox"/> Expose | <input type="checkbox"/> Embedded |
| 2. Chipping | <input type="checkbox"/> Included | <input checked="" type="checkbox"/> Not Included |
| 3. Fabricated Bracket | <input type="checkbox"/> Yes <input type="checkbox"/> Shop | <input type="checkbox"/> Site <input checked="" type="checkbox"/> No |
| 4. Service Ledge | <input type="checkbox"/> Yes | <input checked="" type="checkbox"/> No |
| 5. Dismantling of existing Aircon | <input checked="" type="checkbox"/> Included | <input type="checkbox"/> Not Included |
| 6. Ducting | <input type="checkbox"/> Yes | <input checked="" type="checkbox"/> No |

Dimension :

- Plastering, carpentry and restoration works are to be done by the customer.
- Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
- Processing of mechanical plan, working permit, electrical permit are to be done by the customer.
- Other concern: Expose Drain line and copper pipe


Will use existing breaker

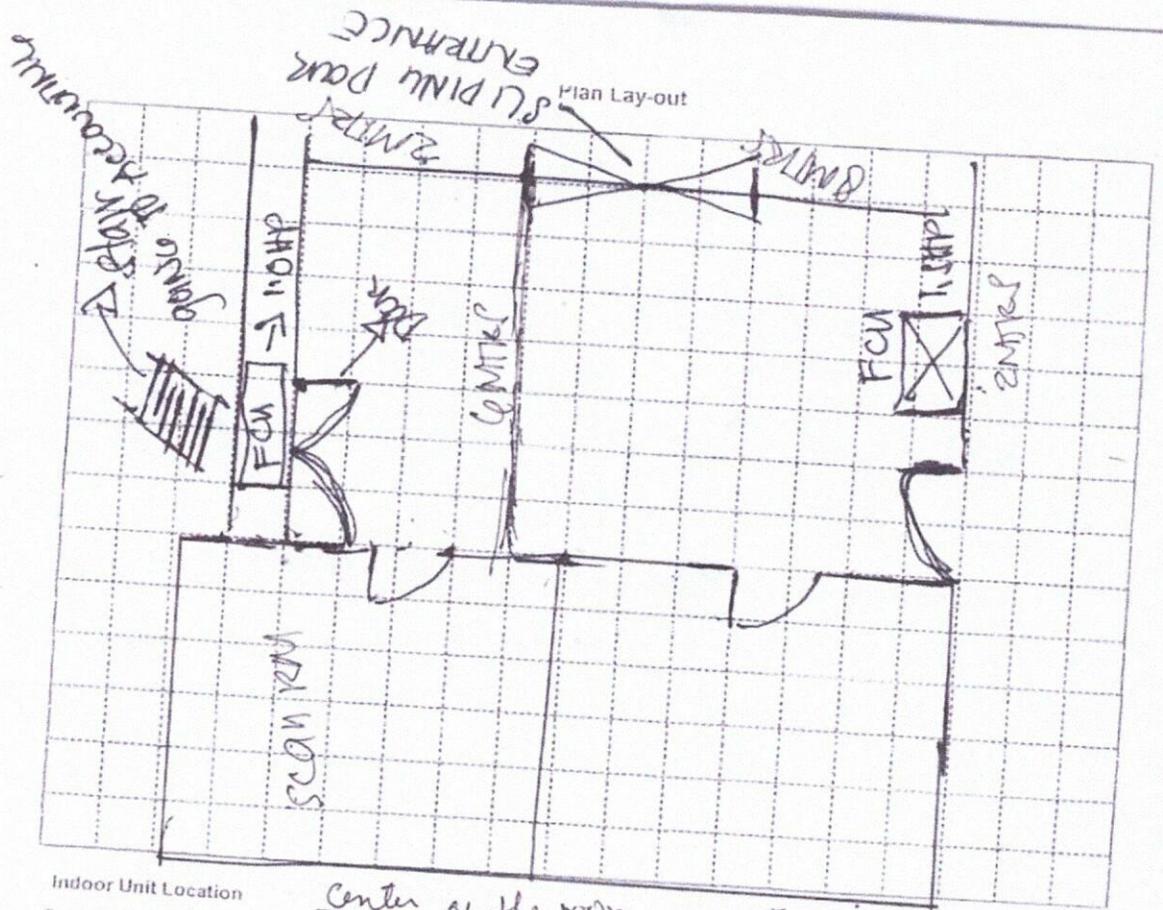

Indoor Unit Location: Center of the room upon Entering
 Outdoor Unit Location: Out side the room
 Pipe Length: 39 Ft.
 Special Note: _____

Installation Cost Estimate			
Material Description	Qty	Unit Cost	Total Cost
Copper Tube (excess of 10 ft)	2330, 2430, 2520, 3520, 4520		
Wire (Royal Cord-signal wire) (excess of 10ft)	29 Ft.	350/ft	P 10,150
Wire (Royal Cord - Breaker to ODU)	39 Ft.	120/ft	P 4,680
Circuit Breaker	1		P 300
Bracket (ODU)	20A, 30A, 40A/1ph, 40A/3ph		
Bracket (WAC)	(Imptd. / Fabricated) : (Floor / Wall)		
PVC Pipe (drain)	Angle Type		
PVC Pipe (electrical)	1/2", 3/4"		
Drain Pump	3/4", 1"	3 pcs	150/pcs = P 450
Drain Pump Hose			
Chipping Works			
Dismantling Fee (existing air-conditioner)	mitr.		
Initial Charge	1 unit	1,500	P 1,500
TOTAL ESTIMATE			P 17,500
			P 13,300

- Note:
- 1 Initial Charge includes labor, 10ft Copper tube, 10ft Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials.
 - 2 Survey fee will be deducted in the installation fee

Prepared by: 
 Signature Over Printed Name

Customer Conforms: _____
 Signature Over Printed Name

REVIEWED BY:


 ENGR. ADRIAN NOGOY
 PROJECT ENGINEER-KPII
 02/07/2026

JRA JERRICO

Refrigeration and Air-conditioning Services
 54, 19 Felixvill, Mangahan, Sto. Niño Bitubiran, Binangonan Rizal
 Email: jraairconditioning@gmail.com
 Contact Nos. 09267189004/09615215615

Survey Form

Customer Name: Supreme care medical diagnostic and imaging Date: 2/4/24
 Address: 92 claudis st. Brgy. San Juan Morong, Pnd S.J.R. No.: HO-0088956
 Establishment Type: Residential: Area Surveyed: _____
 Commercial: Area Surveyed: Hallway/Entrance a Ramp
 Recommended Product Model: KSG-1WF-25WPKY-8K1M32

Cooling Capacity Computation

Floor Area:	<u>16.02</u> sqm.			
Ceiling Height:	<u>8.5</u> mtr.			
		note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed.		
Floor Area:	<u>16.02</u>	x	550 Btu/h	<u>8811</u> Btu/h
Ceiling Height (excess of 3 mtrs.):	<u>1</u>	x	20%	<u>1762</u> Btu/h
Window Direct Sunlight		x	<u>20%</u> - 50%	<u>1762</u> Btu/h
Total Cooling Capacity				<u>10573</u> Btu/h
Add : Additional Heat Load				
No. of Person	<u>6</u>	x	300 Btu/h	<u>1800</u> Btu/h
No. of Ordinary Light (<40w)	<u>8</u>	x	200 Btu/h	<u>1600</u> Btu/h
No. of Special Light (>40w)		x	400 Btu/h	
No. of Refrigerator (< 6 cu.ft.)		x	400 Btu/h	
No. of Refrigerator (> 6 cu.ft.)		x	800 Btu/h	
No. of Cooking Range		x	1500 Btu/h	
No. of Laptop Computer		x	150 Btu/h	
No. of Desktop Computer		x	400 Btu/h	
No. of Printer		x	500 Btu/h	
No. of Photocopier		x	1000 Btu/h	
Total Cooling Capacity				<u>3400</u> Btu/h
Recommended Cooling Capacity				<u>13973</u> Btu/h

Note : Compressor warranty will be reduced to ___ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length

Scope of Work Agreement


- | | | |
|-----------------------------------|--|--|
| 1. Copper tube lay-out | <input checked="" type="checkbox"/> Expose | <input type="checkbox"/> Embedded |
| 2. Chipping | <input type="checkbox"/> Included | <input checked="" type="checkbox"/> Not Included |
| 3. Fabricated Bracket | <input type="checkbox"/> Yes <input type="checkbox"/> Shop | <input type="checkbox"/> Site <input checked="" type="checkbox"/> No |
| 4. Service Ledge | <input type="checkbox"/> Yes | <input checked="" type="checkbox"/> No |
| 5. Dismantling of existing Aircon | <input checked="" type="checkbox"/> Included | <input type="checkbox"/> Not Included |
| 6. Ducting | <input type="checkbox"/> Yes | <input checked="" type="checkbox"/> No |

Dimension : _____

- Plastering, carpentry and restoration works are to be done by the customer.
- Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer
- Processing of mechanical plan, working permit, electrical permit are to be done by the customer
- Other concern: 1. Expose Drainline and Copper Pipe

2. Will use existing breaker

3. Existing unit in location is 1.5 HP

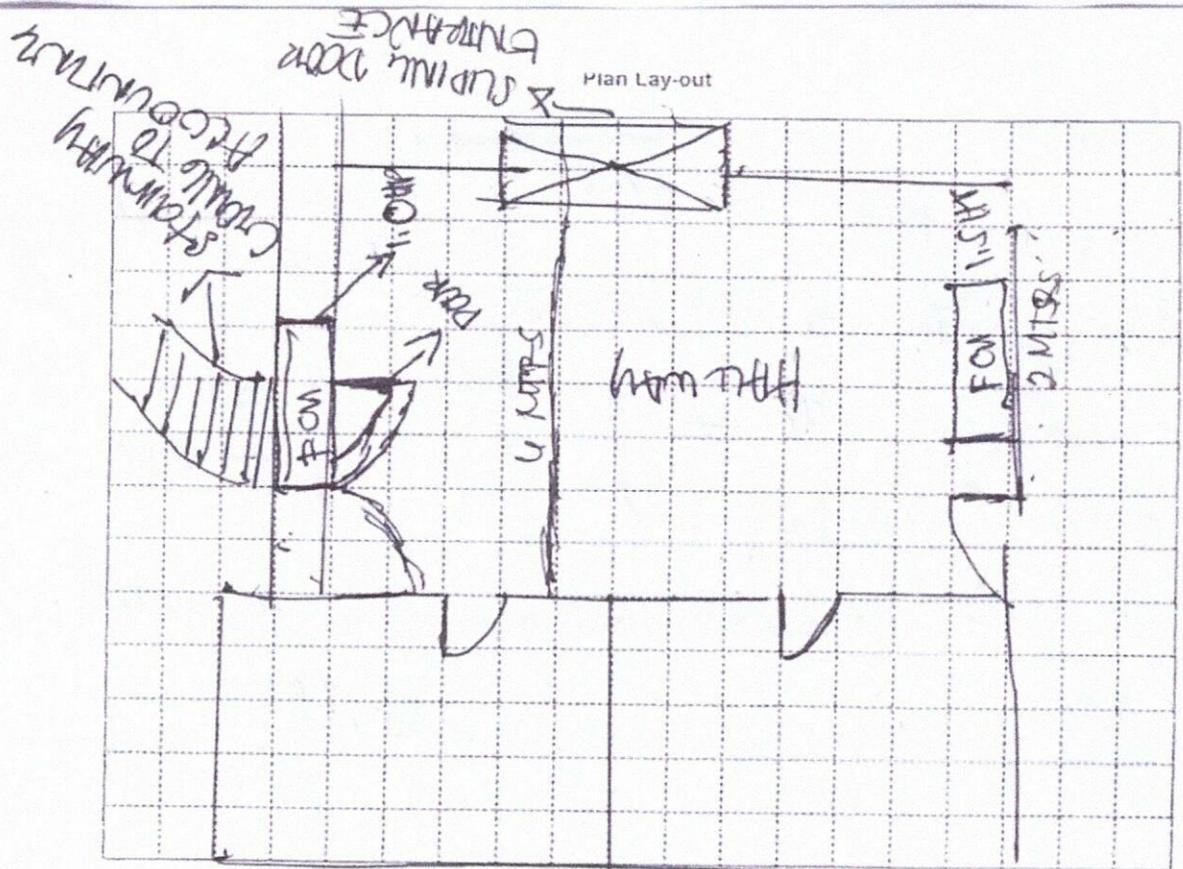


Indoor Unit Location Center of the room
 Outdoor Unit Location outside the room
 Pipe Length 41 Ft.
 Special Note _____

Installation Cost Estimate			
Material Description	Qty	Unit Cost	Total Cost
Copper Tube (excess of 10 ft)	2330, 2430, 2520, 3520, 4620		
Wire (Royal Cord-signal wire) (excess of 10ft.)	2 5mmx4C	31 ft.	400/ft. P 12,400
Wire (Royal Cord - Breaker to ODU)	3.5mm / 5.5mm x 3C	36 ft.	100/ft. P 3,600
Circuit Breaker	20A, 30A, 40A/1ph, 40A/3ph	5 pt.	60/pt. P 300
Bracket (ODU)	(Imptd / Fabricated) - (Floor / Wall)		
Bracket (WAC)	Angle Type		
PVC Pipe (drain)	1/2" . 3/4"	3 pcs	150/pc. P 450
PVC Pipe (electrical)	3/4" . 1"		
Drain Pump			
Drain Pump Hose			
Chipping Works	mtr		
Dismantling Fee (existing air-conditioner)	1 unit	1500	1500
Initial Charge			8500
TOTAL ESTIMATE		P	26,750

- Note :
- 1 Initial Charge includes labor, 10ft Copper tube, 10ft Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials.
 - 2 Survey fee will be deducted in the installation fee

Prepared by: 
 Signature Over Printed Name

Customer Conforme: _____
 Signature Over Printed Name

REVIEWED BY:

 02/07/2026
 ENGR. ADRIAN NOGOY
 PROJECT ENGINEER-KPII