



January 14, 2025

DR. MAE CAMPOMANES
28 TWIN HILLS STREET, (LOT 15 & LOT 17, BLK 14) ROLLING HILLS VILLAGE, NEW MANILA QUEZON CITY
TEL#: 0995-0447074

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

**** OPTION 2 FOR 1ST FLOOR**

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSG-IWF-30WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	52,744.10	PHP	52,744.10
2	UNIT/S	MODEL: KSG-IWF-25WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	46,816.10	PHP	93,632.20
TOTAL UNIT COST					PHP	146,376.30
OTHERS: DELIVERY CHARGE					PHP	600.00
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	66,280.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	213,256.30

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual).**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

**** CURRENTLY NO AVAILABLE STOCK FOR MODEL KSG-IWF-30WFF-8K1M32.**

Very Truly Yours,


JANELLE S. LIM
KMI-ASSISTANT

Noted by:


MART NATIVIDAD R. FLORES
KMI-SUPERVISOR

Approved By:


MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-01-25-0033
REG-22%/7K

Conforme:

SIGNATURE OVER PRINTED NAME



Kolin Marketing, Inc.
1854 Sta. Rita St., Guadalupe Nuevo, Makati City
Tel.: (632) 8852-6473
Fax: (632) 8852-2170 / (632) 8852-4792
 www.kolinphil.com.ph / kolinphilippines.com

JANUARY 11, 2025

DR. MAE CAMPOMANES

28 Twin Hills Street, (lot 15 & Lot 17 Blk 14) Rolling Hills Village New Manila Quezon City

viber: 09950447074

MODEL	Qty
KSG-IWF-30WIFY8K1M32	1
KSG-IWF-25WIFY8K1M32	2

OPTION2

FIRST FLOOR

GUEST ROOM	Area	32.5 sqm
-------------------	------	----------

ACU 1 3.0 HP Wall Mounted Inverter KSG-IWF-30WIFY8K1M32

Estimated Pipe Length = 27 ft

Estimated Royal Cord Length : 34 ft

Initial Charge

₱ 8,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	17 ft	₱ 400.00/ft	₱ 6,800.00
Royal Cord (comm. wire)	2.mm2 x 4C	24 ft	₱ 100.00/ft	₱ 2,400.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	2 pc/s	₱ 350.00/pc	₱ 700.00
Full thread	3/8" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Metal Clamp	3"	4 pc/s	₱ 120.00/pc	₱ 480.00
				₱ 11,950.00

Estimated Charges	₱ 20,450.00
--------------------------	-------------

ENTERTAINMENT	Area	42 sqm
----------------------	------	--------

ACU 2 2.5 HP Wall Mounted Inverter KSG-IWF-25WIFY8K1M32

Estimated Pipe Length = 20 ft

Estimated Royal Cord Length : 27 ft

Initial Charge

₱ 8,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (floor)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	10 ft	₱ 400.00/ft	₱ 4,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	17 ft	₱ 100.00/ft	₱ 1,700.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00
Circuit Breaker waterproof	40A/ 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	3 pc/s	₱ 350.00/pc	₱ 1,050.00
Metal Clamp	3"	4 pc/s	₱ 120.00/pc	₱ 480.00
				₱ 8,650.00

Estimated Charges	₱ 17,150.00
--------------------------	-------------

ACU 3 2.5 HP Wall Mounted Inverter**KSG-IWF-25WFY8K1M32**

Estimated Pipe Length = 40 ft

Estimated Royal Cord Length = 47 ft

Initial Charge**₱ 8,500.00**

Includes:

Labor

10ft Copper Tube

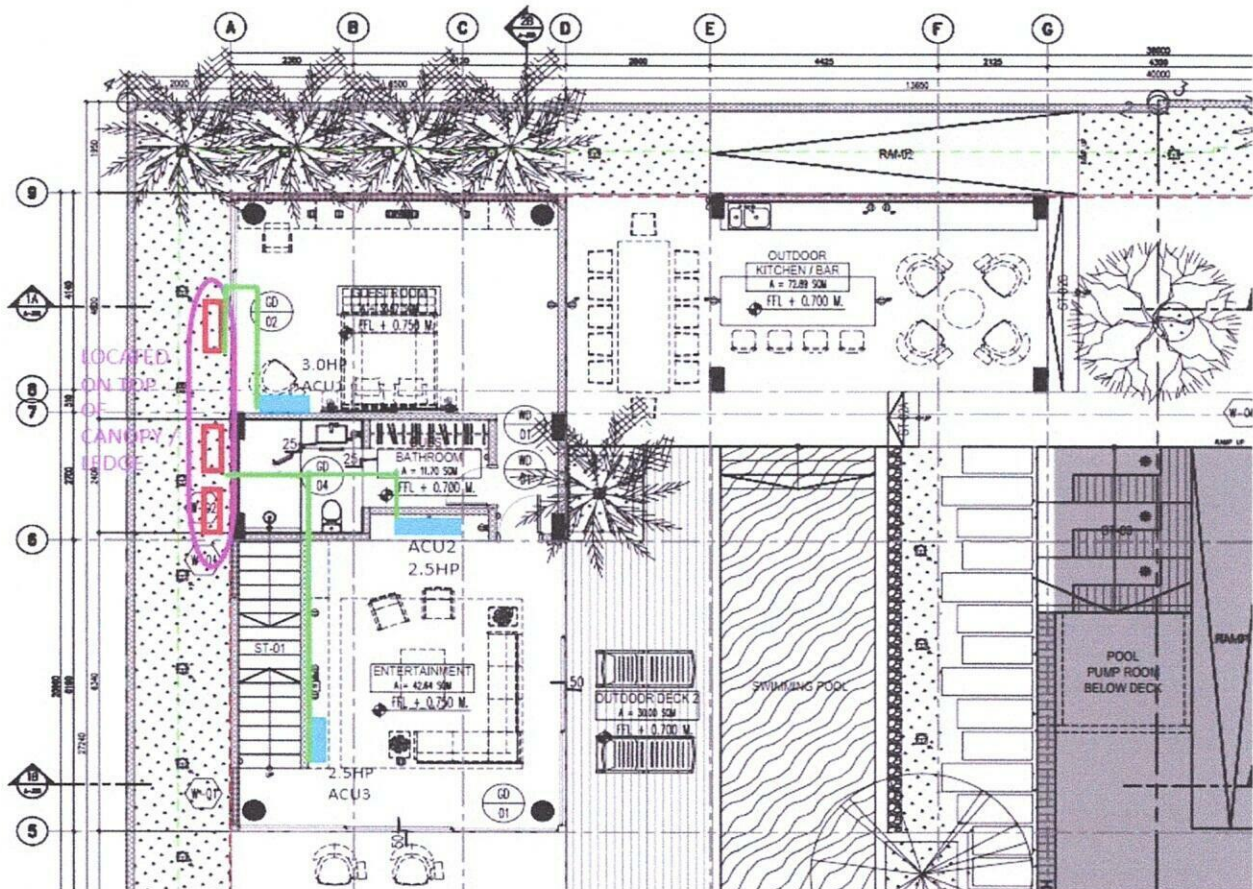
10ft Royal Cord

Outdoor Bracket (floor)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube $\varnothing 1/4" \times \varnothing 5/8"$	30 ft	₱ 400.00/ft	₱ 12,000.00
Royal Cord (comm. wire) 2.mm2 x 4C	37 ft	₱ 100.00/ft	₱ 3,700.00
Royal Cord (ACCU-Breaker) 3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00
Circuit Breaker waterproof 40A/ 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation 2 1/8" x 3/4" x 6'	6 pc/s	₱ 350.00/pc	₱ 2,100.00
Metal Clamp 3"	8 pc/s	₱ 120.00/pc	₱ 960.00
			₱ 20,180.00


Estimated Charges**₱ 28,680.00**

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location based in floor plan only.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for marking and site visit before installation.
- 4 **Need clearance top of unit to ceiling atleast 10cm each units.**
- 5 Working days: Monday to Saturday, 8am- 5pm with parking. Need working permit.
- 6 Mechanical Plans, Permits, Electrical permits not included.
- 7 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 8 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** should be provided by customer's contractor.
- 9 **Final charges will be based on actual installation.**


Prepared by:


Jeffrey Dadios
Field Surveyor

Customer Conformance:

Signature Over Printed Name

Reviewed by:


Engr. Kenneth Zamora
Service Supervisor Shop and
Field Operation