



July 18, 2025

MR. EDDIE GOBING
79 FIREFLY ST., VALLE VERDE 6, BRGY. UGONG, PASIG CITY
TEL#: 0977-7808507 / 0919-0795657 / (02) 8829-4919
Email: jamesgobing@outlook.com

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
2	UNIT/S	MODEL: KLM-IC60-AA1M32 KOLIN FLOOR/CEILING AIRCONDITIONER 55,503 Kj/h (5.0TR) INVERTER R-32 SINGLE PHASE	151,995.00	115,516.20	PHP	231,032.40
2	UNIT/S	MODEL: KLM-IS40-AA1M32 KOLIN CEILING CASSETTE AIRCONDITIONER 37,980 Kj/h (3.0TR) DC INVERTER R-32 SINGLE PHASE	119,995.00	91,196.20	PHP	182,392.40
3	UNIT/S	MODEL: KSG-IWF-30WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	51,212.20	PHP	153,636.60
3	UNIT/S	MODEL: KSG-IWF-25WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	45,436.20	PHP	136,308.60
2	UNIT/S	MODEL: KSG-IWF-20WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 19,000 Kj/h (2.0HP) FULL DC INVERTER W/ WIFI R-32	59,595.00	38,292.20	PHP	76,584.40
3	UNIT/S	MODEL: KSG-IWF-15WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 12,960 Kj/h (1.5HP) FULL DC INVERTER W/ WIFI R-32	46,595.00	28,412.20	PHP	85,236.60
TOTAL UNIT COST					PHP	865,191.00
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	609,470.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	1,474,661.00

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR/CEILING: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.
FOR CEILING CASSETTE (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.
FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).

*** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:

MARTIN HANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

KMI-QUOTE-04-25-0276-rev
DCG-24%/7K

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines



July 18, 2025

EDDIE GOBING

79 Firefly St. Valle Verde 6 Brgy Ugong, Pasig City

0977-7808507, 0919-0795657, (020)8829-4919

jamesgobing@outlook.com

Model	Qty
KLM-IC60-AA1M32-I	2
KLM-IS40-AA1M32-I	2
KSG-IWF-30Wfy-8K1M32	3
KSG-IWF-25Wfy-8K1M32	3
KSG-IWF-20Wfy-8K1M32	2
KSG-IWF-15Wfy-8K1M32	3

rev1

GROUND FLOOR

LANAI	Area ≈ 50 sq.m
--------------	----------------

ACU 1	4.0hp Ceiling Cassette Inverter	KLM-IS40-AA1M32
Estimated Pipe Length :	69	ft
Estimated Royal Cord Length :	76	ft
Initial Charge		P 12,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	3/8"x 5/8"	59 ft	P 400.00 / ft	P 23,600.00
Royal Cord	2.mm2 x 4C	66 ft	P 100.00 / ft	P 6,600.00
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	5 ft	P 70.00 / ft	P 350.00
Circuit Breaker(NEMA)	40A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Rubber Insulation	2 1/8"x3/4" x 6'	8 pc(s)	P 350.00 / pc	P 2,800.00
Full Thread	3 meters	5 pc(s)	P 150.00 / pc	P 750.00
Pipe hanger	3 inches	12 pc(s)	P 120.00 / pc	P 1,440.00
Outdoor Bracket(WALL)	fabricated	1 pc(s)	P 5,000.00 / pc	P 5,000.00
Pvc (drainline)	blue- 1 inch	6 pc(s)	P 200.00 / pc	P 1,200.00
				P 42,740.00

Estimated Charges	P 54,740.00
--------------------------	--------------------

ACU 2	4.0hp Ceiling Cassette Inverter	KLM-IS40-AA1M32
Estimated Pipe Length :	60	ft
Estimated Royal Cord Length :	67	ft
Initial Charge		P 12,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	3/8"x 5/8"	50 ft	P 400.00 / ft	P 20,000.00
Royal Cord	2.mm2 x 4C	57 ft	P 100.00 / ft	P 5,700.00
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	5 ft	P 70.00 / ft	P 350.00
Circuit Breaker(NEMA)	40A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Rubber Insulation	2 1/8"x3/4" x 6'	8 pc(s)	P 350.00 / pc	P 2,800.00
Full Thread	3 meters	5 pc(s)	P 150.00 / pc	P 750.00
Pipe hanger	3 inches	12 pc(s)	P 120.00 / pc	P 1,440.00
Outdoor Bracket(WALL)	fabricated	1 pc(s)	P 5,000.00 / pc	P 5,000.00
Pvc (drainline)	blue- 1 inch	6 pc(s)	P 200.00 / pc	P 1,200.00
				P 38,240.00

Estimated Charges	P 50,240.00
--------------------------	--------------------

Estimated Charges	P 56,780.00
-------------------	-------------

SECOND FLOOR

MASTER BEDROOM 2 Area ≈ 24 sq.m**ACU 9 2.5hp Wallmounted Inverter** *KSG-IWF-25Wfy-8K1M32*

Estimated Pipe Length : 46 ft

Estimated Royal Cord Length : 51 ft

Initial Charge

P 8,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (wall)

Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	1/4"x 5/8"	36 ft	P 400.00 / ft	P 14,400.00
Royal Cord	2.mm2 x 4C	41 ft	P 100.00 / ft	P 4,100.00
Royal Cord (ODU-Breaker)	3.5mm2 x 3C	7 ft	P 60.00 / ft	P 420.00
Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Rubber Insulation	2 1/8"x3/4" x 6'	6 pc(s)	P 350.00 / pc	P 2,100.00
Full Thread	3 meters	1 pc(s)	P 150.00 / pc	P 150.00
Pipe hanger	3 inches	10 pc(s)	P 120.00 / pc	P 1,200.00
Pvc (drainline)	blue- 3/4 inch	2 pc(s)	P 150.00 / pc	P 300.00
				P 23,670.00

Estimated Charges **P 32,170.00****MASTER BEDROOM3** Area ≈ 31 sq.m**ACU 10 3.0hp Wallmounted Inverter** *KSG-IWF-30Wfy-8K1M32*

Estimated Pipe Length : 43 ft

Estimated Royal Cord Length : 48 ft

Initial Charge

P 8,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket

Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	1/4"x 5/8"	33 ft	P 400.00 / ft	P 13,200.00
Royal Cord	2.mm2 x 4C	38 ft	P 100.00 / ft	P 3,800.00
Royal Cord (ODU-Breaker)	3.5mm2 x 3C	7 ft	P 60.00 / ft	P 420.00
Rubber Insulation	2 1/8"x3/4" x 6'	2 pc(s)	P 350.00 / pc	P 700.00
Full Thread	3 meters	1 pc(s)	P 150.00 / pc	P 150.00
Pipe hanger	3 inches	4 pc(s)	P 120.00 / pc	P 480.00
Circuit Breaker(NEMA)	40A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Pvc (drainline)	blue- 3/4 inch	2 pc(s)	P 150.00 / pc	P 300.00
				P 20,050.00

Estimated Charges **P 28,550.00****ANTEROOM** Area ≈ 20 sq.m**ACU 11 2.0hp Wallmounted Inverter** *KSG-IWF-20Wfy-8K1M32*

Estimated Pipe Length : 56 ft

Estimated Royal Cord Length : 61 ft

Initial Charge

P 7,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (wall)

Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	1/4"x 1/2"	46 ft	P 350.00 / ft	P 16,100.00
Royal Cord	2.mm2 x 4C	51 ft	P 100.00 / ft	P 5,100.00
Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P 60.00 / ft	P 300.00
Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Rubber Insulation	2 1/8"x3/4" x 6'	6 pc(s)	P 350.00 / pc	P 2,100.00
Full Thread	3 meters	2 pc(s)	P 150.00 / pc	P 300.00
Pipe hanger	3 inches	10 pc(s)	P 120.00 / pc	P 1,200.00
Pvc (drainline)	blue- 3/4 inch	2 pc(s)	P 150.00 / pc	P 300.00
				P 26,400.00

Estimated Charges **P 33,900.00**

WALK IN CLOSET	Area ≈ 29 sq.m
-----------------------	----------------

ACU 12 3.0hp Wallmounted Inverter **KSG-IWF-30Wfy-8K1M32**
 Estimated Pipe Length : 56 ft
 Estimated Royal Cord Length : 61 ft
 Initial Charge P 8,500.00

Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Outdoor Bracket
 Other Consumables

Additional Charges	Description	Unit		Price Per Unit		Subtotal
Copper Tube	1/4"x 5/8"	46 ft	P	400.00 / ft	P	18,400.00
Royal Cord	2.mm2 x 4C	51 ft	P	100.00 / ft	P	5,100.00
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	5 ft	P	70.00 / ft	P	350.00
Rubber Insulation	2 1/8"x3/4" x 6'	10 pc(s)	P	350.00 / pc	P	3,500.00
Full Thread	3 meters	2 pc(s)	P	150.00 / pc	P	300.00
Pipe hanger	3 inches	14 pc(s)	P	120.00 / pc	P	1,680.00
Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	P	1,000.00 / pc	P	1,000.00
Pvc (drainline)	blue- 3/4 inch	1 pc(s)	P	150.00 / pc	P	150.00
						P 30,480.00

Estimated Charges	P 38,980.00
--------------------------	--------------------

MASTER BEDROOM	Area ≈ 29 sq.m
-----------------------	----------------

ACU 13 3.0hp Wallmounted Inverter **KSG-IWF-30Wfy-8K1M32**
 Estimated Pipe Length : 82 ft
 Estimated Royal Cord Length : 87 ft
 Initial Charge P 8,500.00

Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Outdoor Bracket
 Other Consumables

Additional Charges	Description	Unit		Price Per Unit		Subtotal
Copper Tube	1/4"x 5/8"	72 ft	P	400.00 / ft	P	28,800.00
Royal Cord	2.mm2 x 4C	77 ft	P	100.00 / ft	P	7,700.00
Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P	60.00 / ft	P	300.00
Rubber Insulation	2 1/8"x3/4" x 6'	12 pc(s)	P	350.00 / pc	P	4,200.00
Full Thread	3 meters	2 pc(s)	P	150.00 / pc	P	300.00
Pipe hanger	3 inches	16 pc(s)	P	120.00 / pc	P	1,920.00
Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	P	1,000.00 / pc	P	1,000.00
Pvc (drainline)	blue- 3/4 inch	2 pc(s)	P	150.00 / pc	P	300.00
						P 44,520.00

Estimated Charges	P 53,020.00
--------------------------	--------------------

BEDROOM2	Area ≈ 25 sq.m
-----------------	----------------

ACU 14 2.5hp Wallmounted Inverter **KSG-IWF-25Wfy-8K1M32**
 Estimated Pipe Length : 79 ft
 Estimated Royal Cord Length : 84 ft
 Initial Charge P 8,500.00

Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Outdoor Bracket (wall)
 Other Consumables


Additional Charges	Description	Unit		Price Per Unit		Subtotal
Copper Tube	1/4"x 5/8"	69 ft	P	400.00 / ft	P	27,600.00
Royal Cord	2.mm2 x 4C	74 ft	P	100.00 / ft	P	7,400.00
Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P	60.00 / ft	P	300.00
Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	P	1,000.00 / pc	P	1,000.00
Rubber Insulation	2 1/8"x3/4" x 6'	12 pc(s)	P	350.00 / pc	P	4,200.00
Full Thread	3 meters	2 pc(s)	P	150.00 / pc	P	300.00
Pipe hanger	3 inches	16 pc(s)	P	120.00 / pc	P	1,920.00
Pvc (drainline)	blue- 3/4 inch	2 pc(s)	P	150.00 / pc	P	300.00
						P 43,020.00

Estimated Charges	P 51,520.00
--------------------------	--------------------


ACU 15	2.5hp Wallmounted Inverter		KSG-IWF-25Wfy-8K1M32	
	Estimated Pipe Length	:	82	ft
	Estimated Royal Cord Length	:	87	ft
	Initial Charge			P 8,500.00

Total Estimated Charges	P 609,470.00
-------------------------	--------------

Engr. Kenneth Zamora
Service Supervisor
Field and Shop Operation

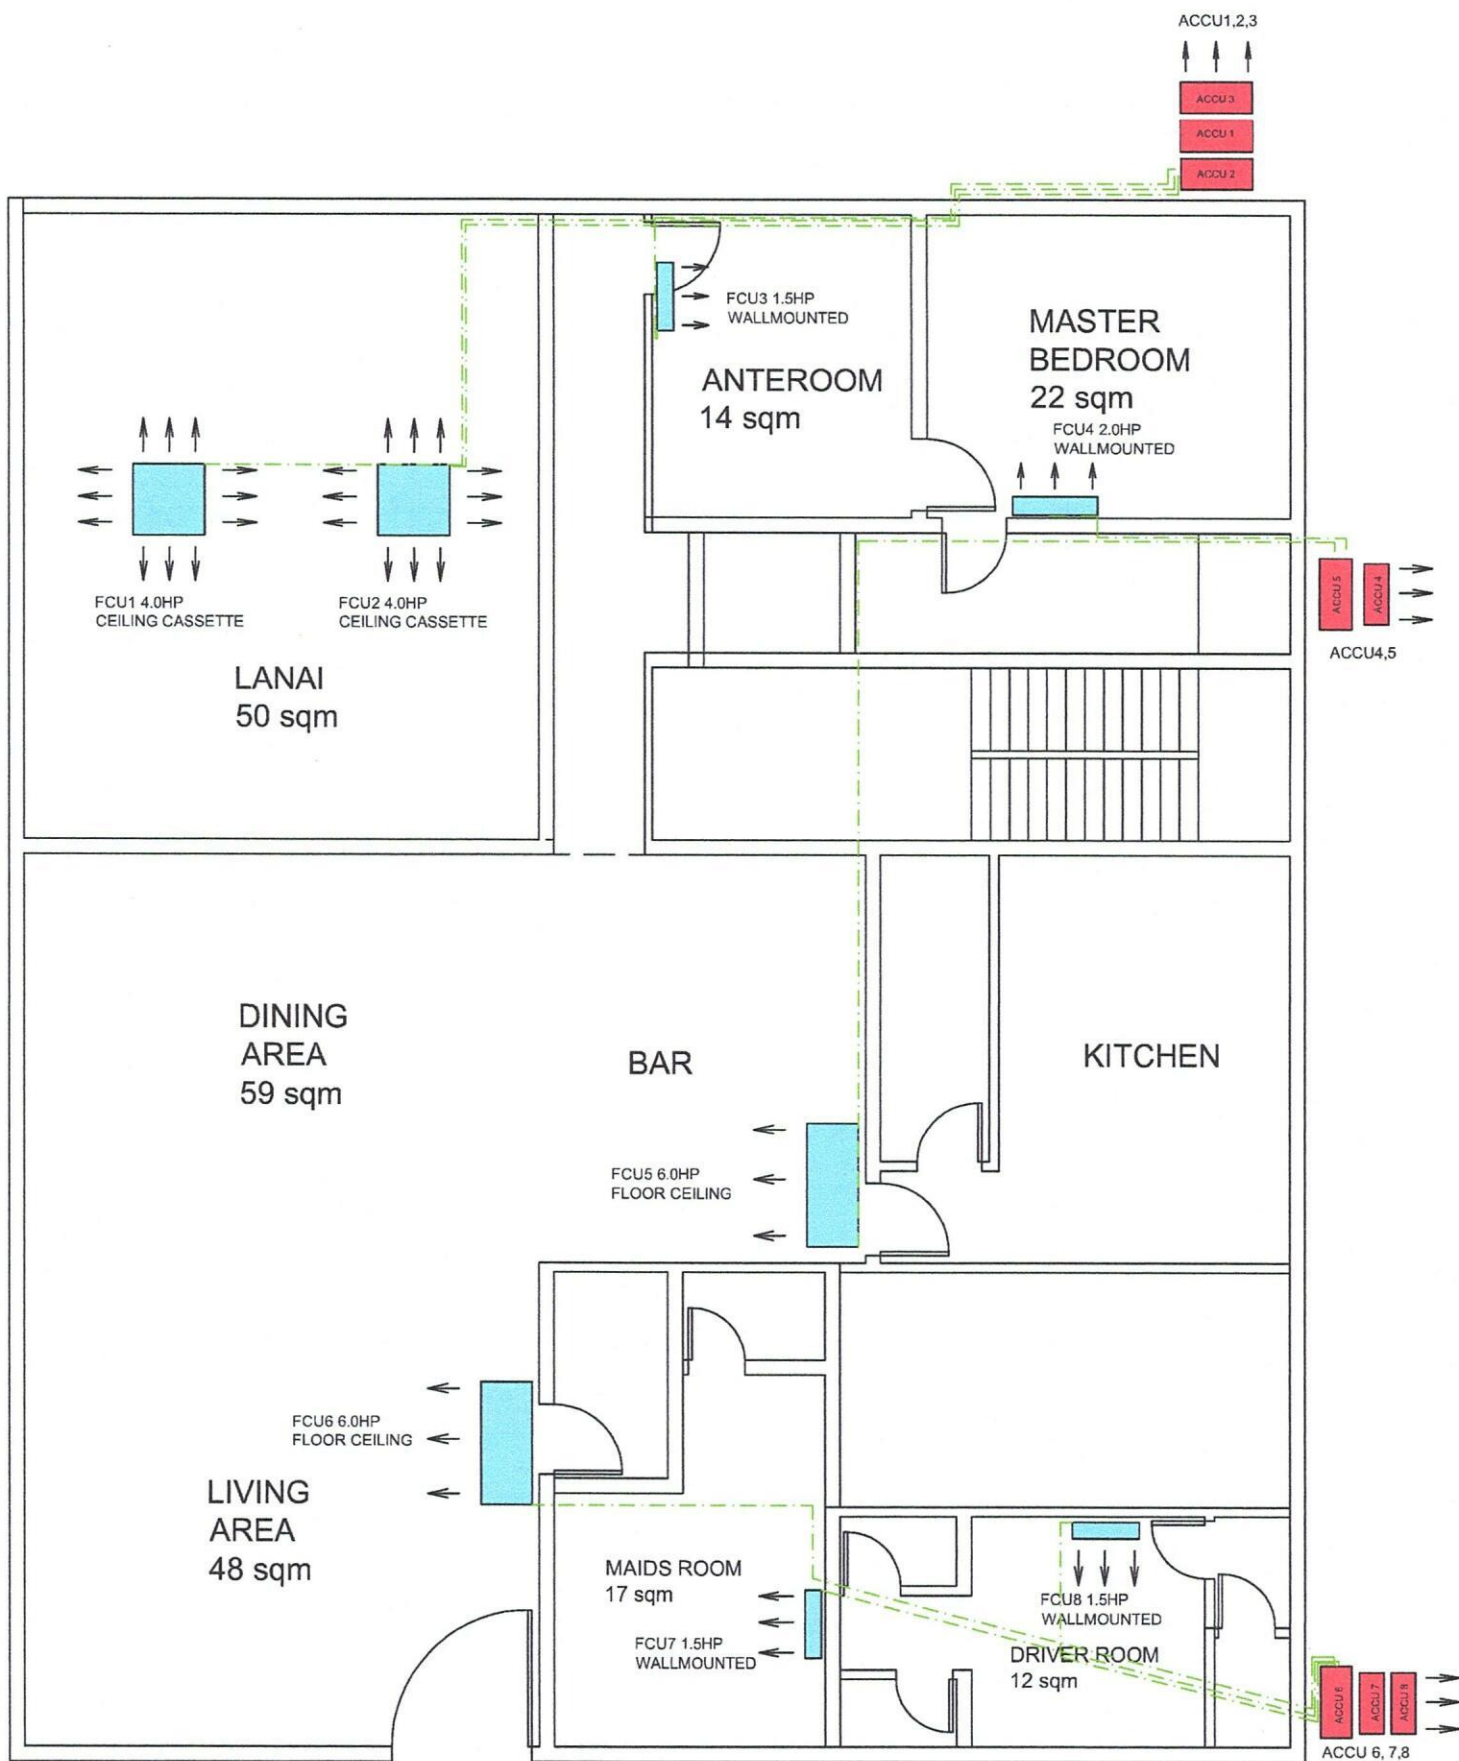

GROUND FLOOR

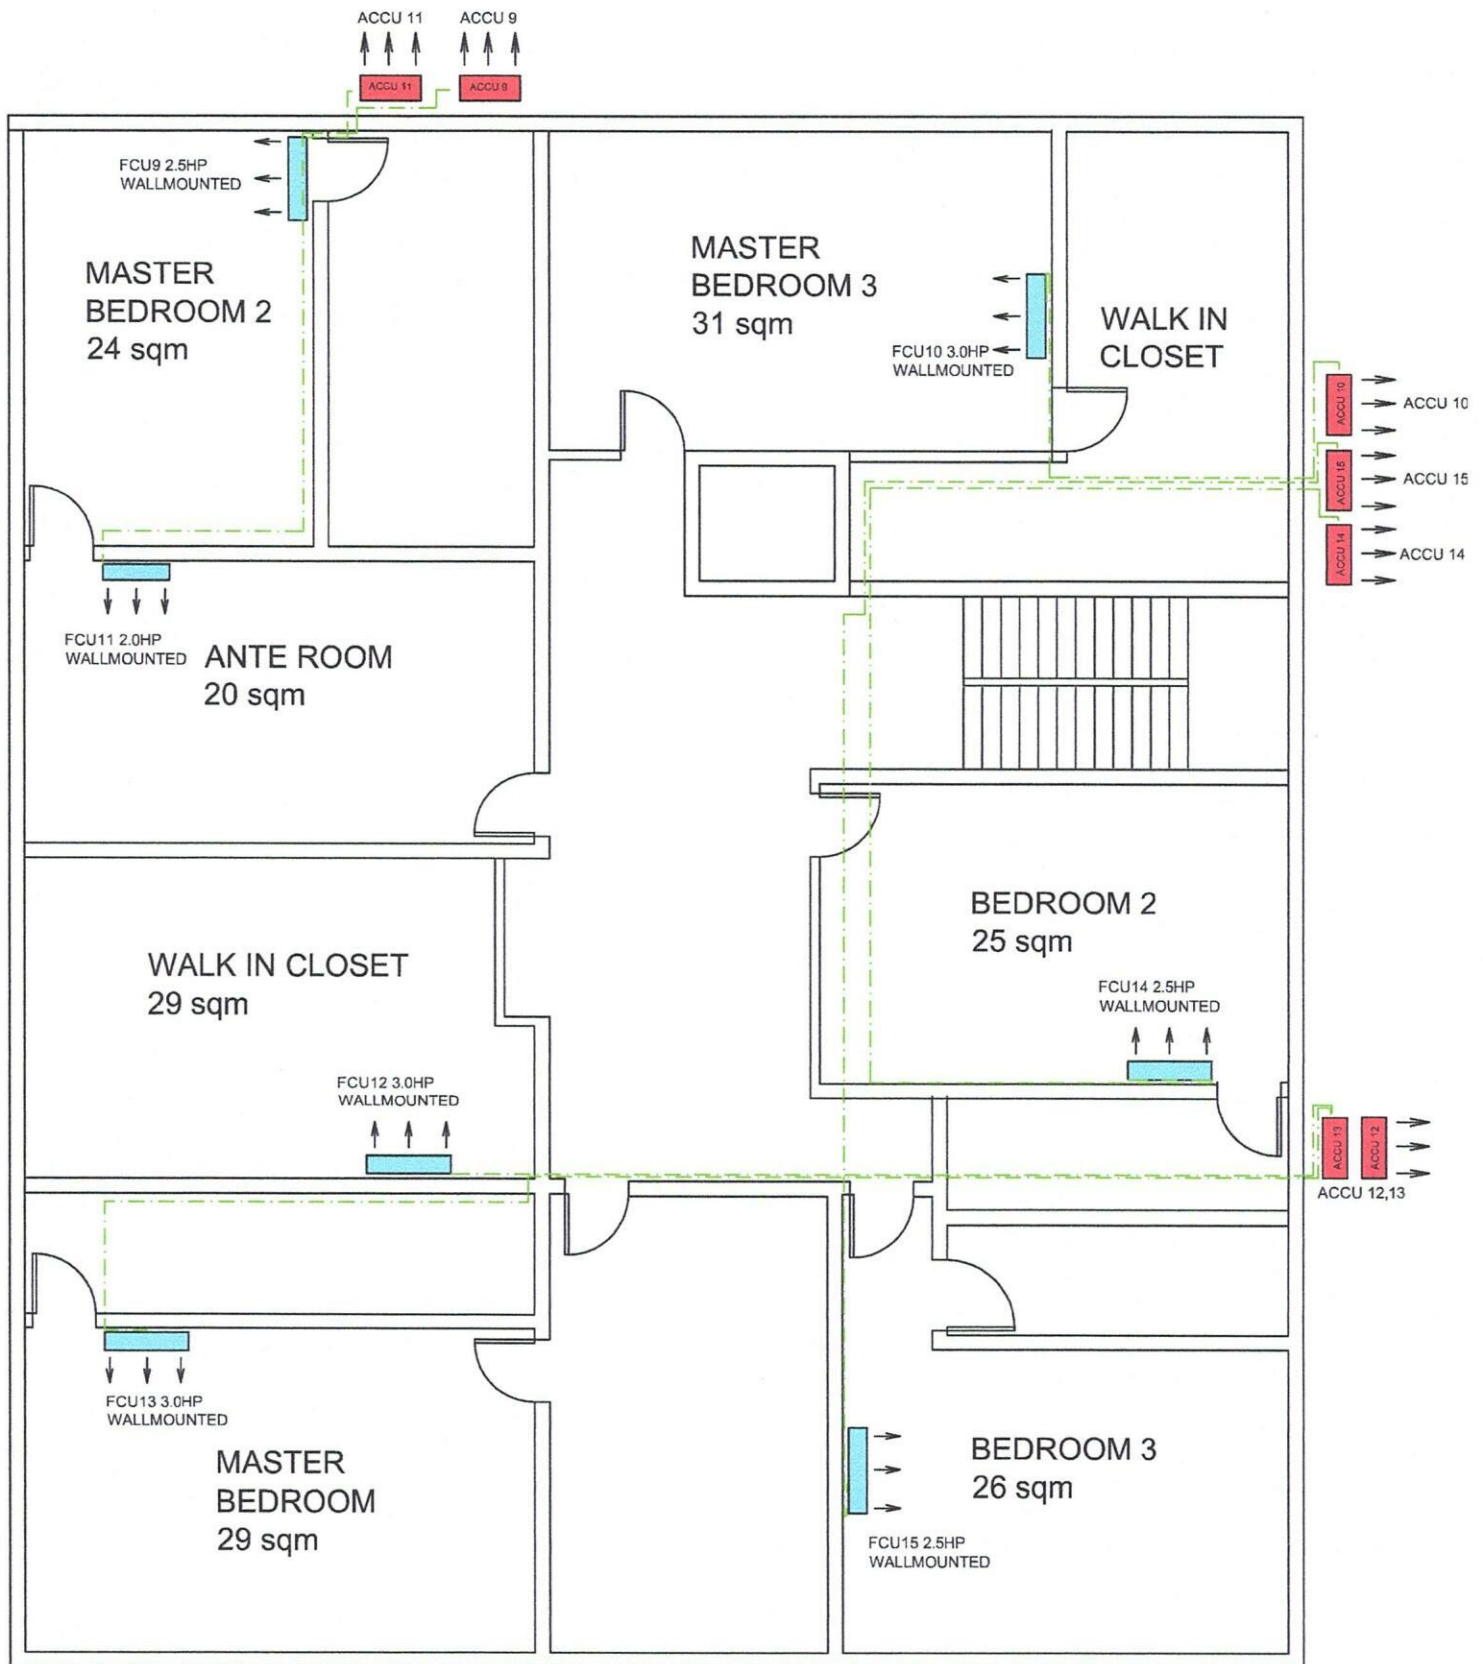

SECOND FLOOR