

July 28, 2025

MR. KENDRICK CHUA
21 TAFT WEST GREENHILLS, BRGY. GREENHILLS, SAN JUAN CITY
TEL#: 0917-8190131

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
2	UNIT/S	MODEL: KL-IF60-G6H1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 58,140 Kj/h (5.0TR) FULL DC INVERTER R32 SINGLE PHASE	165,995.00	108,836.30	PHP	217,672.60
1	UNIT/S	MODEL: KLG-IF40-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 37,980 Kj/h (3.0TR) FULL DC INVERTER R-32 SINGLE PHASE	113,195.00	76,764.30	PHP	76,764.30
1	UNIT/S	MODEL: KLM-IC40-AA1M32 KOLIN FLOOR/CEILING AIRCONDITIONER 37,980 Kj/h (3.0TR) DC INVERTER R-32	117,995.00	87,316.30	PHP	87,316.30
2	UNIT/S	MODEL: KSG-IWF-30WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	49,680.30	PHP	99,360.60
2	UNIT/S	MODEL: KSG-IWF-25WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	44,056.30	PHP	88,112.60
3	UNIT/S	MODEL: KSG-IWF-20WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 19,000 Kj/h (2.0HP) FULL DC INVERTER W/ WIFI R-32	59,595.00	37,100.30	PHP	111,300.90
1	UNIT/S	MODEL: KAG-200WCINV KOLIN WINDOW TYPE QUAD SERIES AIRCONDITIONER 19,080 Kj/h (2.0HP) FULL DC INVERTER W/ WIFI R-32 (WxDxH) 26"x28"x17"	43,595.00	30,460.30	PHP	30,460.30
TOTAL UNIT COST					PHP	710,987.60
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	270,945.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	981,932.60

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.
FOR SPLIT TYPE: ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB, TEN (10) YEARS WARRANTY ON COMPRESSOR.
FOR WINDOW TYPE: ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB, TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).

*** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:

MARTIN HANIEL R. PEORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-07-25-0569
BOD-24%/14K/7K/1.8K

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines



July 25, 2025

KENDRICK CHUA

21 Taft West Greenhills, Brgy Greenhills San Juan City

[0917-8190131](tel:0917-8190131)

MODEL	Qty
KL -IF60-G6H1M32	2
KLG-IF40-5G1M32	1
KLM-IC40-AA1M32	1
KSG-IWF-30Wfy8K1M32	2
KSG-IWF-25Wfy8K1M32	2
KSG-IWF-20Wfy8K1M32	3
KAG-200WCINV	1

GUEST ROOM	Area	32 sqm
-------------------	------	--------

ACU 1	2.5 HP Wall Mounted Inverter	KSG-IWF-25Wfy8K1M32			
	Estimated Pipe Length =	23 ft			
	Estimated Royal Cord Length =	28 ft			
	Initial Charge				₱ 8,500.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Wall)				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Copper Tube	Ø 1/4" x Ø 5/8"	13 ft	₱ 400.00/ft	₱ 5,200.00
	Royal Cord (comm. wire)	2.mm2 x 4C	18 ft	₱ 100.00/ft	₱ 1,800.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
					₱ 8,720.00

Estimated Charges	₱ 17,220.00
--------------------------	--------------------

DINING AREA	Area	38 sqm
--------------------	------	--------

ACU 2	3.0 HP Wall Mounted Inverter	KSG-IWF-30Wfy8K1M32			
	Estimated Pipe Length =	10 ft			
	Estimated Royal Cord Length =	15 ft			
	Initial Charge				₱ 8,500.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Wall)				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Royal Cord (comm. wire)	2.mm2 x 4C	5 ft	₱ 100.00/ft	₱ 500.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
					₱ 2,100.00

Estimated Charges	₱ 10,600.00
--------------------------	--------------------

LANAI	Area 57 sqm
--------------	--------------------

ACU 3	6.0 HP Floor Standing Inverter	KL-IF60-G6H1M32
--------------	---------------------------------------	------------------------

Estimated Pipe Length = 12 ft

Estimated Royal Cord Length = 19 ft

Initial Charge

₱ 14,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	2 ft	₱ 400.00/ft	₱ 800.00
Royal Cord (comm. wire)	9 ft	₱ 100.00/ft	₱ 900.00
Royal Cord (ACCU-Breaker)	5 ft	₱ 70.00/ft	₱ 350.00
Circuit Breaker waterproof	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Outdoor bracket	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	2 pc/s	₱ 200.00/pc	₱ 400.00
			₱ 8,450.00

Estimated Charges

₱ 22,450.00

MAIN LIVING AREA	Area 88 sqm
-------------------------	--------------------

ACU 4	6.0 HP Floor Standing Inverter	KL-IF60-G6H1M32
--------------	---------------------------------------	------------------------

Estimated Pipe Length = 10 ft

Estimated Royal Cord Length = 17 ft

Initial Charge

₱ 14,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Royal Cord (comm. wire)	7 ft	₱ 100.00/ft	₱ 700.00
Royal Cord (ACCU-Breaker)	5 ft	₱ 70.00/ft	₱ 350.00
Circuit Breaker waterproof	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Outdoor bracket	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	2 pc/s	₱ 200.00/pc	₱ 400.00
			₱ 7,450.00

Estimated Charges

₱ 21,450.00

ACU 5 4.0 HP Floor Standing Inverter**KLG-IF40-5G1M32**

Estimated Pipe Length = 50 ft

Estimated Royal Cord Length = 55 ft

Initial Charge

₱ 11,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket (Floor)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	40 ft ₱ 400.00/ft	₱ 16,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	45 ft ₱ 100.00/ft	₱ 4,500.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	5 ft ₱ 70.00/ft	₱ 350.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s ₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	8 pc/s ₱ 350.00/pc	₱ 2,800.00
Full thread	3/8" x 10'	2 pc/s ₱ 150.00/pc	₱ 300.00
Metal Clamp	3"	10 pc/s ₱ 120.00/pc	₱ 1,200.00
PVC blue	1" x 10'	2 pc/s ₱ 200.00/pc	₱ 400.00
Outdoor bracket	Fabricated wall	1 pc/s ₱ 5,000.00/pc	₱ 5,000.00
			₱ 31,550.00

Estimated Charges**₱ 42,550.00****ROOM3**

Area 24.6 sqm

ACU 6 2.0 HP Wall Mounted Inverter**KSG-IWF-20Wfy8K1M32**

Estimated Pipe Length = 23 ft

Estimated Royal Cord Length = 28 ft

Initial Charge

₱ 7,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	13 ft ₱ 350.00/ft	₱ 4,550.00
Royal Cord (comm. wire)	2.mm2 x 4C	18 ft ₱ 100.00/ft	₱ 1,800.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft ₱ 60.00/ft	₱ 300.00
Rubber Insulation	1 1/8" x 3/8" x 6'	3 pc/s ₱ 150.00/pc	₱ 450.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s ₱ 1,000.00/pc	₱ 1,000.00
PVC blue	3/4" x 10'	2 pc/s ₱ 150.00/pc	₱ 300.00
			₱ 8,400.00

Estimated Charges**₱ 15,900.00**

ROOM2	Area 26 sqm
--------------	--------------------

ACU 7	2.0 HP Wall Mounted Inverter	KSG-IWF-20Wfy8K1M32
--------------	-------------------------------------	----------------------------

Estimated Pipe Length = 10 ft
 Estimated Royal Cord Length = 15 ft

Initial Charge ₱ 7,500.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (Wall)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Royal Cord (comm. wire)	2.mm2 x 4C	5 ft	₱ 100.00/ft	₱ 500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 2,100.00

Estimated Charges	₱ 9,600.00
--------------------------	------------

ROOM1	Area 28 sqm
--------------	--------------------

ACU 8	2.0 HP Wall Mounted Inverter	KSG-IWF-20Wfy8K1M32
--------------	-------------------------------------	----------------------------

Estimated Pipe Length = 10 ft
 Estimated Royal Cord Length = 15 ft

Initial Charge ₱ 7,500.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (Wall)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Royal Cord (comm. wire)	2.mm2 x 4C	5 ft	₱ 100.00/ft	₱ 500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 2,100.00

Estimated Charges	₱ 9,600.00
--------------------------	------------

FAMILY ROOM	Area 37 sqm
--------------------	--------------------

ACU 9	3.0 HP Wall Mounted Inverter	KSG-IWF-30Wfy8K1M32
--------------	-------------------------------------	----------------------------

Estimated Pipe Length = 23 ft
 Estimated Royal Cord Length = 28 ft

Initial Charge ₱ 8,500.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (Wall)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	13 ft	₱ 400.00/ft	₱ 5,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	18 ft	₱ 100.00/ft	₱ 1,800.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	2 pc/s	₱ 350.00/pc	₱ 700.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	3/4" x 10'	5 pc/s	₱ 150.00/pc	₱ 750.00
				₱ 14,750.00

Estimated Charges	₱ 23,250.00
--------------------------	-------------

MASTER BEDROOM	Area	31.5 sqm
-----------------------	------	----------

ACU 10 2.5 HP Wall Mounted Inverter

KSG-IWF-25Wfy8K1M32

Estimated Pipe Length = 53 ft

Estimated Royal Cord Length = 58 ft

Initial Charge

₱ 8,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	43 ft	₱ 400.00/ft	₱ 17,200.00
Royal Cord (comm. wire)	48 ft	₱ 100.00/ft	₱ 4,800.00
Royal Cord (ACCU-Breaker)	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	8 pc/s	₱ 350.00/pc	₱ 2,800.00
Full thread	1 pc/s	₱ 150.00/pc	₱ 150.00
Metal Clamp	10 pc/s	₱ 120.00/pc	₱ 1,200.00
Outdoor bracket	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	2 pc/s	₱ 150.00/pc	₱ 300.00
			₱ 32,750.00

Estimated Charges

₱ 41,250.00

DEN	Area	22.5 sqm
------------	------	----------

ACU 11 2.0 HP Window type Inverter

KAG-200WCINV

Initial Charge

₱ 1,200.00

Includes:

Labor

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Window type bracket	1 pc/s	₱ 600.00/pc	₱ 600.00
PVC blue	2 pc/s	₱ 150.00/pc	₱ 300.00
Drain Hose	5 ft	₱ 25.00/ft	₱ 125.00
			₱ 1,025.00

Estimated Charges

₱ 2,225.00

ATTICK	Area	40 sqm
---------------	------	--------

ACU 12 4.0HP Floor Ceiling Inverter

KLM-IC40-AA1M32

Estimated Pipe Length = 23 ft

Estimated Royal Cord Length = 30 ft

Initial Charge

₱ 12,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	13 ft	₱ 400.00/ft	₱ 5,200.00
Royal Cord (comm. wire)	20 ft	₱ 100.00/ft	₱ 2,000.00
Royal Cord (ACCU-Breaker)	5 ft	₱ 70.00/ft	₱ 350.00
Circuit Breaker waterproof	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 pc/s	₱ 350.00/pc	₱ 700.00
Full thread	1 pc/s	₱ 150.00/pc	₱ 150.00
Indoor bracket	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	1 pc/s	₱ 6,500.00/pc	₱ 6,500.00
PVC blue	3 pc/s	₱ 150.00/pc	₱ 450.00
			₱ 17,850.00

Estimated Charges

₱ 29,850.00

Dismantle	Window Type	4 set	₱ 500.00/set	₱ 2,000.00
Dismantle	Wall Mounted	3 set	₱ 2,500.00/set	₱ 7,500.00
Dismantle	Floor Standing	4 set	₱ 3,000.00/set	₱ 12,000.00
Dismantle	Ceiling Suspended	1 set	₱ 3,500.00/set	₱ 3,500.00

Total Dismantled Units	₱ 25,000.00
-------------------------------	--------------------


Total Estimated Charges	₱ 270,945.00
--------------------------------	---------------------

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location based in floor plan. Recommendation not yet final.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for markings of each units and site visit before installation.need to open the ceiling.
- 4 Working days: Monday to Saturday, 8am- 5pm with parking.Need working permit.
- 5 Mechanical Plans, Permits, Electrical permits not included.
- 6 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 7 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , should be provided by customer's contractor.
- 8 **Final charges will be based on actual installation.**


Prepared by:



 Jeffrey Dadios
 Field Surveyor

Customer Conformance:


 Signature Over Printed Name

Reviewed by:



 Engr. Kenneth Zamora
 Service Supervisor Shop and
 Field Operation

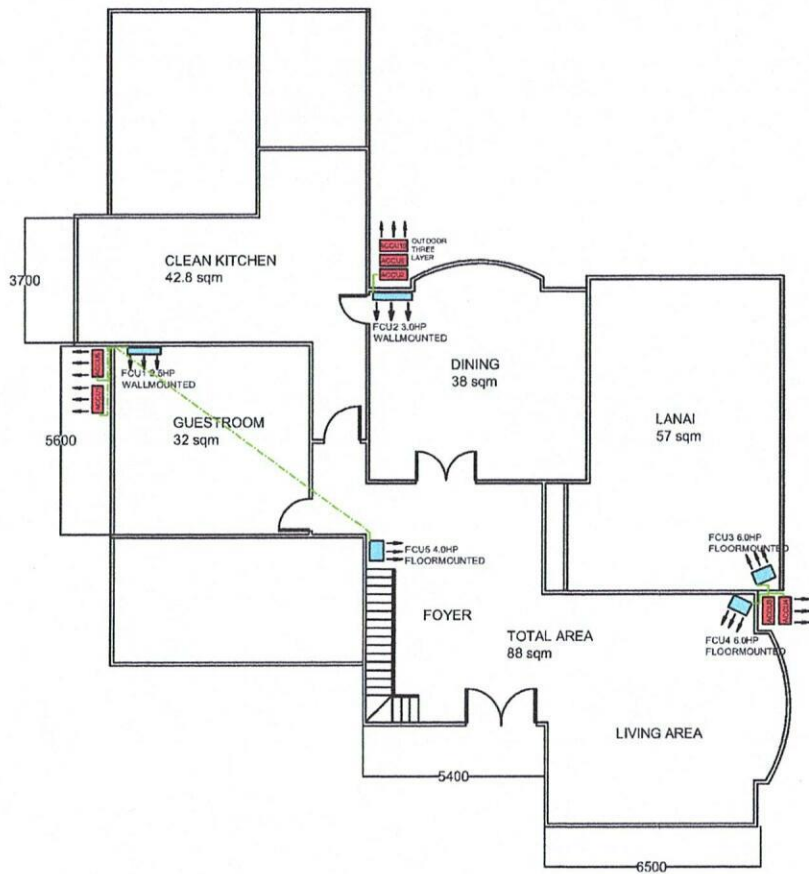

GROUND FLOOR

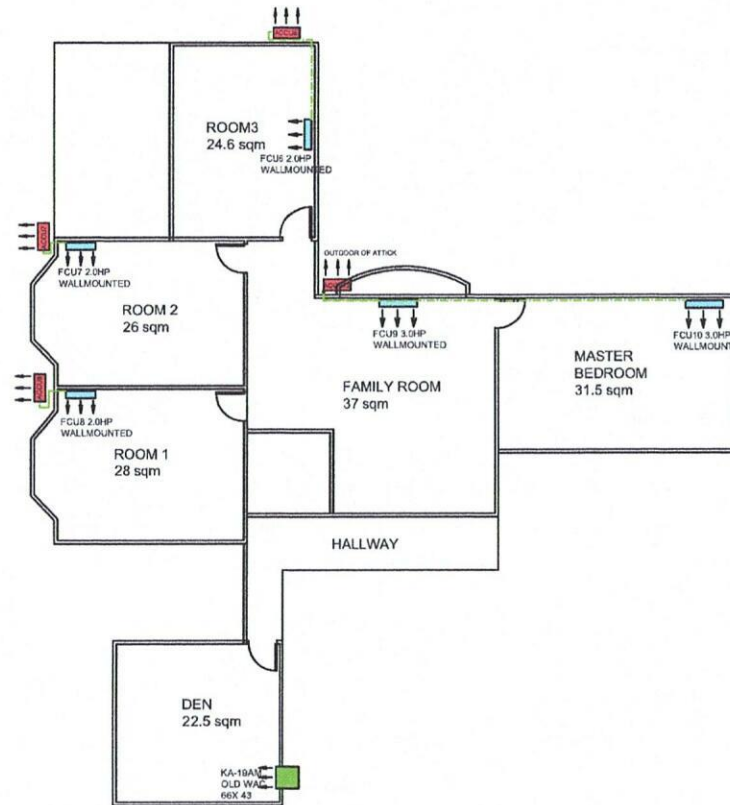

SECOND FLOOR



ATTICK