



July 24, 2025

MS. BEVERLY GALLMAN
UNIT 2015 LUSH RESIDENCES, BAGTIKAN COR. KAMAGONG ST., MAKATI CITY
TEL#: 0917-5221568

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

* OPTION 1 *

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSM-IW15-WCT10M1M32 KOLIN WALL MOUNTED CERTUS SERIES AIRCONDITIONER 12,660 Kj/h (1.5HP) REGULAR INVERTER W/ WIFI R-32	32,995.00	21,076.20	PHP	21,076.20
TOTAL UNIT COST					PHP	21,076.20
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	12,060.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	33,736.20

* OPTION 2 *

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSG-IWF-15WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 12,960 Kj/h (1.5HP) FULL DC INVERTER W/ WIFI R-32	46,595.00	28,412.20	PHP	28,412.20
TOTAL UNIT COST					PHP	28,412.20
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	12,060.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	41,072.20

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).

*** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:
MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:
MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-07-25-0564
LCY-24%/4K/7K

Conforme: _____
SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines



**1st Quad Airconditioning Specialists'
Trading & Services**

2644 Taft Avenue Brgy. 97, Zone 14 Pasay City

Tel No. (02) 659-8867

Email Address: 1stQuadaircon@gmail.com



Survey Form

Customer Name Beverly Gallman Date July 18, 2025
Address UNIT 2015 With Redundant car-kamagong Motor SJR No HO-00265428
Establishment Type Residential ☒ Area Surveyed Bedroom
Commercial ☐ Area Surveyed _____

Recommended Product Model: _____

Cooling Capacity Computation

Floor Area 12.5 sqm
Ceiling Height _____ mtr
note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed
Floor Area 12.5 x 550 Btu/h 6875 Btu/h
Ceiling Height (excess of 3 mtrs) _____ x 20% _____ Btu/h
Window Direct Sunlight _____ x 20% - 50% _____ Btu/h
Total Cooling Capacity _____ Btu/h

Add: Additional Heat Load

No. of Person 1 x 300 Btu/h 300 Btu/h
No. of Ordinary Light (<40w) 1 x 200 Btu/h 200 Btu/h
No. of Special Light (>40w) _____ x 400 Btu/h _____ Btu/h
No. of Refrigerator (< 6 cu ft.) _____ x 400 Btu/h _____ Btu/h
No. of Refrigerator (> 6 cu ft.) _____ x 800 Btu/h _____ Btu/h
No. of Cooking Range _____ x 1500 Btu/h _____ Btu/h
No. of Laptop Computer _____ x 150 Btu/h _____ Btu/h
No. of Desktop Computer _____ x 400 Btu/h _____ Btu/h
No. of Printer _____ x 500 Btu/h _____ Btu/h
No. of Photocopier _____ x 1000 Btu/h _____ Btu/h
Total Cooling Capacity 7375 Btu/h

Recommended Cooling Capacity

1.5HP Btu/h

Note: Compressor warranty will be reduced to _____ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.

Scope of Work Agreement


1. Copper tube lay-out ☐ Expose ☒ Embedded
2. Chipping ☐ Included ☐ Not Included
3. Fabricated Bracket ☒ Yes ☐ Shop ☐ Site ☐ No
4. Service Ledge ☐ Yes ☐ No
5. Dismantling of existing Aircon ☐ Included ☐ Not Included
6. Ducting ☐ Yes ☐ No

Dimension

7. Plastering, carpentry and restoration works are to be done by the customer
8. Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer
9. Processing of mechanical plan, working permit, electrical permit are to be done by the customer
10. Other concern

Note: 1.5HP Air Recommended Capacity from Kapeg
bracket in customer's unit showing down at malangan din
yang wala nisa, Existing bracket

Plan Lay-out

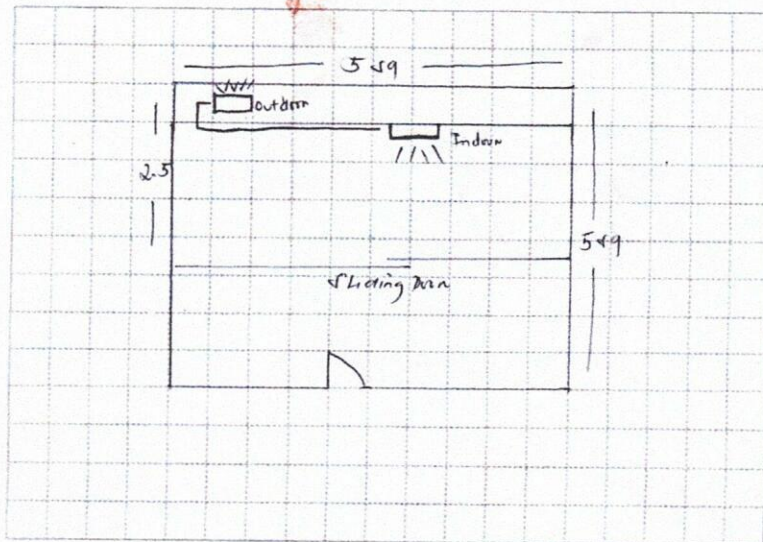

Indoor Unit Location

Bedroom

Outdoor Unit Location

ra box, ra may babe ng matn unit

Pipe Length

20 ft

Special Note

Installation Cost Estimate

Material Description	Qty	Unit Cost	Total Cost
Copper Tube (excess of 10 ft.)	2330, 2430, 2520, 3520, 4620		
Wire (Royal Cord-signal wire) (excess of 10ft.)	2 0mmx4C		
Wire (Royal Cord - Breaker to ODU)	3.5mm / 5.5mm x 3C		
Circuit Breaker	20A, 30A, 40A/1ph, 40A/3ph		
Bracket (ODU)	(impld / Fabricated) (Floor / Wall)		
Bracket (WAC)	Angle Type		
PVC Pipe (drain)	1/2" 3/4"		
PVC Pipe (electrical)	3/4" 1"		
Drain Pump			
Drain Pump Hose			
Chipping Works	m ²		
Dismantling Fee (existing air conditioner)			
Initial Charge			7,500
TOTAL ESTIMATE			P 12,060

Note:

1. Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials
2. Survey fee will be deducted in the installation fee

Prepared by:

Forgers Pasumbal
Signature Over Printed Name

Customer Conforme:

Signature Over Printed Name