

MAY 14, 2025

PHHELP DODGE PHIL INC

2nd Flr. BCS Prime Bldg. 2297 Pasong Tamo Extn. Brgy Pasong Tamo, Makati City

0918-9166529

MODEL
KL-IF60-G6H1M32


QUANTITY
1

SALES AREA				Area ≈ 210 sq.m	
------------	--	--	--	-----------------	--

ACU	6.0hp Floormounted Inverter	KL-IF60-G6H1M32			
	Estimated Pipe Length :	132	ft		
	Estimated Royal Cord Length :	139	ft		
	Initial Charge			P	14,000.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Indoor bracket (floor)				
	Other Consumables				

Additional Charges	Description	Unit		Price Per Unit		Subtotal
	Copper Tube	3/8"x 5/8"	122 ft	P	400.00 / ft	P 48,800.00
	Royal Cord	2.mm2 x 4C	129 ft	P	100.00 / ft	P 12,900.00
	Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft	P	70.00 / ft	P 490.00
	Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s)	P	1,000.00 / pc	P 1,000.00
	Rubber Insulation	2 1/8"x3/4" x 6'	20 pc(s)	P	350.00 / pc	P 7,000.00
	Full Thread	3 meters	6 pc(s)	P	150.00 / pc	P 900.00
	Pipe hanger	3 inches	26 pc(s)	P	120.00 / pc	P 3,120.00
	PVC(Drainline)	Blue -1 inch	1 pc(s)	P	200.00 / pc	P 200.00
	Outdoor Bracket(floor)	fabricated	1 pc(s)	P	2,500.00 / pc	P 2,500.00
	Dismantle	5tr	1 pc(s)	P	3,000.00 / pc	P 3,000.00
	Scaffoldings	4sets	1 pc(s)	P	1,500.00 / pc	P 1,500.00
	Drain Hose	White -1/2"	7 ft	P	25.00 / ft	P 175.00
						P 81,585.00

Estimated Charges	P 95,585.00
-------------------	-------------

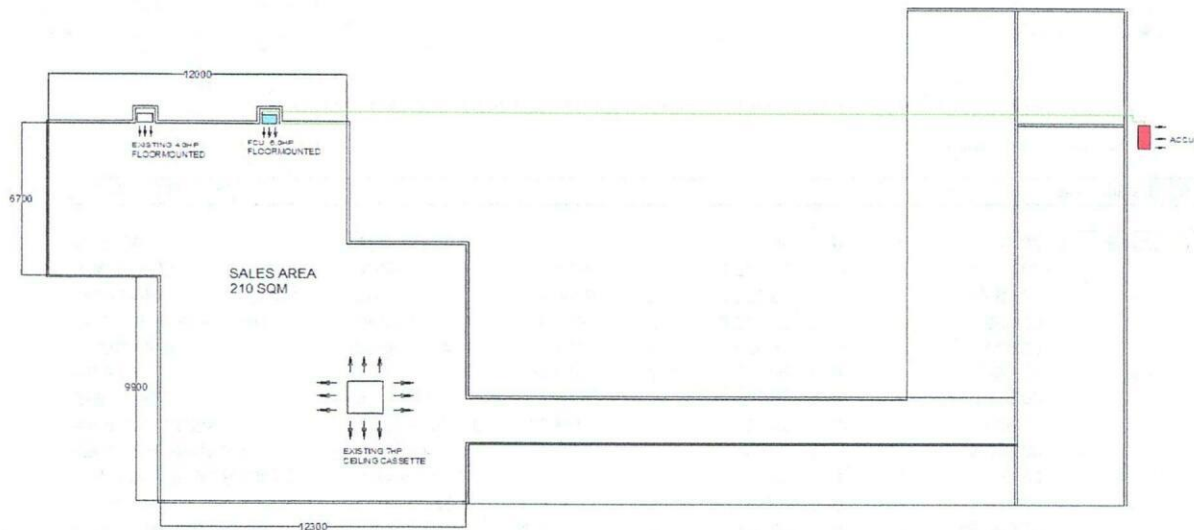

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Note:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Bring rope and harness.
- 4 Coppertube expose inside the area going inside the ceiling.
- 5 Need waiver due to long pipelength.
- 4 Working days: Saturday and Sunday only, 8am- 5pm with parking. Need working permit.
- 5 Mechanical Plans, Permits, Electrical permits not included.
- 6 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 7 Electrical power supply (feeder line) **220v/ 60hz/ 1ph** is not included in the scope of work of Kolin.
- 8 **Final charges will be based on actual installation.**

Prepared by:

Jeffrey Dadios

Field Surveyor

Customer Conformer:

Signature Over Printed Name

Reviewed by:

Engr. Kenneth Zamora

Service Supervisor

Field and Shop Operation

MAY 14, 2025

PHELP DODGE PHIL INC

2nd Flr. BCS Prime Bldg. 2297 Pasong Tamo Extn. Brgy Pasong Tamo, Makati City

0918-9166529

Please be informed that the air-conditioner you intend to purchase is under capacity as compared to the following unit that we proposed:

Area	Kolin's Recommendation	Customer's Choice	Remarks
SALES AREA	KAG-IF100-4F3M410	KL-IF60-G60H1M32	Estimated pipe length of 40 meters exceeds the maximum allowable length of 30 meters.


Since the unit of your choice is under capacity, it is probable that you may experience the following;

1. Capacity of the unit to cool the area will take longer or it will not cool the area at all that may lead to your dissatisfaction with the cooling performance of our unit.
2. Power consumption will be higher due to frequent running of compressor for not reaching the desired temperature within the normal parameter.
3. Useful life of compressor will be shortened due to excessive running beyond the normal run cycle.

Considering the above conditions, we regret to inform you that we cannot guarantee the efficient performance of unit. **Also, One (1) year warranty for parts (compressor warranty - VOID).**

For your guidance and information

Prepared by:



Jeffrey Dadios
Surveyor

Noted by:



Engr. Kenneth Zamora
Service Supervisor
Field and Shop Operation

Approved by:



Mr. Alvin de Rivera
Service Manager

Customer Conforme:

Signature Over Printed Name