



July 4, 2025

MR. JORES MAGSOMBOL  
93 LILAC ST., SSS VILLAGE MARIKINA CITY  
TEL#: 0967-3963544  
Email: mydel40@gmail.com

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

\* OPTION 2 \*

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
2	UNIT/S	MODEL: KSG-IWF-30Wfy-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	51,212.20	PHP	102,424.40
1	UNIT/S	MODEL: KSG-IWF-25Wfy-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	45,436.20	PHP	45,436.20
TOTAL UNIT COST					PHP	147,860.60
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	53,100.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	201,560.60

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: \*\*\* Need to sign waiver agreement due to under capacity of unit choice.

PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

\*\* *Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual).*

\*\*\* *You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.*

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi\_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM  
KMI-ASSISTANT

Noted by:

MART NAYANIEL R. FLORES  
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES  
AVP - FINANCE

KMI-QUOTE-07-25-0519  
ADR-24%/7K

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines

June 24, 2025  
 Jores Magsombol  
 93 Lilac St. SSS Village, Marikina City  
 0967-3963544  
[mydel40@gmail.com](mailto:mydel40@gmail.com)

MODEL	Qty
KSG-IWF-30WFFY8K1M32	2
KSG-IWF-25WFFY8K1M32	1

OPTION 2

DINING AREA EXTENSION		Area	32 sqm
-----------------------	--	------	--------

ACU 1	2.5 HP Wall Mounted Inverter	KSG-IWF-25WFFY8K1M32			
	Estimated Pipe Length = 10 ft				
	Estimated Royal Cord Length = 15 ft				
	<b>Initial Charge</b>				₱ 8,500.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Wall)				
	Consumables				
	<b>Installation Materials</b>	<b>Description</b>	<b>Qty</b>	<b>Price per qty</b>	<b>Subtotal</b>
	Royal Cord (comm. wire)	2.mm2 x 4C	5 ft	₱ 100.00/ft	₱ 500.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	PVC blue	3/4" x 10'	3 pc/s	₱ 150.00/pc	₱ 450.00
					₱ 2,250.00

<b>Estimated Charges</b>	₱ 10,750.00
--------------------------	-------------

MAIN DINING AREA		Area	60 sqm
------------------	--	------	--------


ACU 2	3.0 HP Wall Mounted Inverter	KSG-IWF-30WFFY8K1M32			
	Estimated Pipe Length = 39 ft				
	Estimated Royal Cord Length = 44 ft				
	<b>Initial Charge</b>				₱ 8,500.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Wall)				
	Consumables				
	<b>Installation Materials</b>	<b>Description</b>	<b>Qty</b>	<b>Price per qty</b>	<b>Subtotal</b>
	Copper Tube	Ø 1/4" x Ø 5/8"	29 ft	₱ 400.00/ft	₱ 11,600.00
	Royal Cord (comm. wire)	2.mm2 x 4C	34 ft	₱ 100.00/ft	₱ 3,400.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
					₱ 16,600.00

<b>Estimated Charges</b>	₱ 25,100.00
--------------------------	-------------

ACU 3	3.0 HP Wall Mounted Inverter	KSG-IWF-30WFFY8K1M32			
	Estimated Pipe Length = 23 ft				
	Estimated Royal Cord Length = 28 ft				
	<b>Initial Charge</b>				₱ 8,500.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Wall)				
	Consumables				
	<b>Installation Materials</b>	<b>Description</b>	<b>Qty</b>	<b>Price per qty</b>	<b>Subtotal</b>
	Copper Tube	Ø 1/4" x Ø 5/8"	13 ft	₱ 400.00/ft	₱ 5,200.00
	Royal Cord (comm. wire)	2.mm2 x 4C	18 ft	₱ 100.00/ft	₱ 1,800.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	PVC blue	3/4" x 10'	3 pc/s	₱ 150.00/pc	₱ 450.00
					₱ 8,750.00

<b>Estimated Charges</b>	₱ 17,250.00
--------------------------	-------------



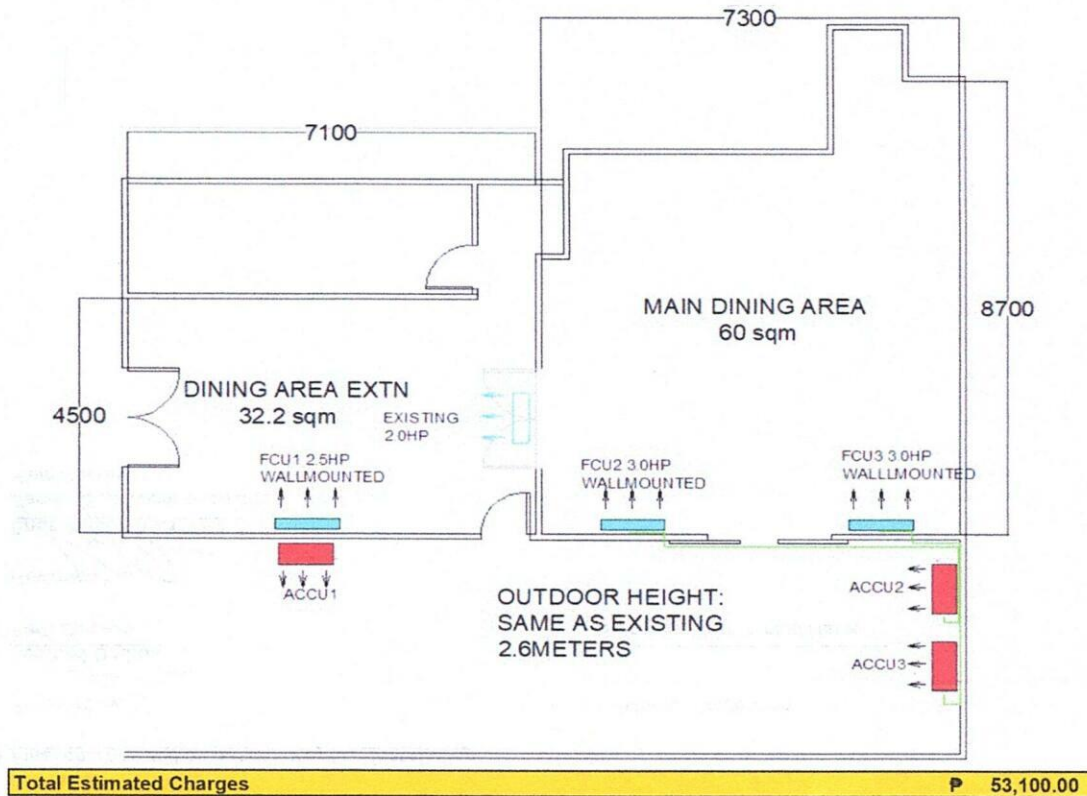

**Validity:** This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

**Installation notes:**

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 Mechanical Plans, Permits, Electrical permits not included.
- 3 ACU2 and ACU3 Need waiver due to undercapacity.
- 4 ACU1 With Existing 2.0hp wallmounted.
- 5 Expose copper tube and drainline in the area. Bring plywood 3/4 inch for indoor Backing all units.
- 6 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 7 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph**, should be provided by customer's contractor.
- 8 **Final charges will be based on actual installation.**

Prepared by:

Jeffrey Dadios  
Field Surveyor

Customer Conformer:

\_\_\_\_\_  
Signature Over Printed Name

Reviewed by:

Engr. Kenneth Zamora  
Service Supervisor Shop and  
Field Operation

July 3, 2025  
Jores Magsombol  
93 Lilac St. SSS Village, Marikina City  
0967-3963544  
mydel40@gmail.com

Please be informed that the air-conditioner you intend to purchase is under capacity as compared to the following unit that we proposed:

Location	Area	Kolin's Recommendation	Customer's Choice	Remarks
MAIN DINING	60 sqm	KLG-IF40-5G1M32 2 UNITS	KSG-IWF-30WFY8K1M32 2 UNITS	Calculated 7.8hp under by 1.8hp

Since the unit of your choice is under capacity, it is probable that you may experience the following;

1. Capacity of the unit to cool the area will take longer or it will not cool the area at all that may lead to your dissatisfaction with the cooling performance of our unit.
2. Power consumption will be higher due to frequent running of compressor for not reaching the desired temperature within the normal parameter.
3. Useful life of compressor will be shortened due to excessive running beyond the normal run cycle.

Considering the above conditions, we regret to inform you that we cannot guarantee the efficient performance of unit. **Also, One (1) year warranty for parts (compressor-1year).**

For your guidance and information


Prepared by:

Jeoffrey T. Dadios  
Surveyor

Approved by:

 7/4/25  
Mr. Alvin de Rivera  
Service Manager

Noted by:

  
Engr. Kenneth Zamora  
Service Supervisor - Field  
and Shop Operation

Customer Conforme:

Signature Over Printed Name