



July 7, 2025

MR. DARRICK TEE
18 IBSEN ST., FILINVEST BATASAN, QUEZON CITY
TEL#: 0977-2707943
Email: jaihanss@yahoo.com

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KL-IF60-G6H1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 58,140 Kj/h (5.0TR) FULL DC INVERTER R32 SINGLE PHASE	165,995.00	112,156.20	PHP	112,156.20
2	UNIT/S	MODEL: KLG-IF40-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 37,980 Kj/h (3.0TR) FULL DC INVERTER R-32 SINGLE PHASE	113,195.00	79,028.20	PHP	158,056.40
1	UNIT/S	MODEL: KAG-250WCINV KOLIN WINDOW TYPE QUAD SERIES AIRCONDITIONER 24,120 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32 (WxDxH) 26"x31.5"x17"	48,695.00	35,208.20	PHP	35,208.20
1	UNIT/S	MODEL: KAG-200WCINV KOLIN WINDOW TYPE QUAD SERIES AIRCONDITIONER 19,080 Kj/h (2.0HP) FULL DC INVERTER W/ WIFI R-32 (WxDxH) 26"x28"x17"	43,595.00	31,332.20	PHP	31,332.20
1	UNIT/S	MODEL: KAG-145WCINV KOLIN WINDOW TYPE QUAD SERIES AIRCONDITIONER 13,210 Kj/h (1.5HP) FULL DC INVERTER W/ WIFI R-32 (WxDxH) 22"x28"x15"	32,995.00	23,776.20	PHP	23,776.20
TOTAL UNIT COST					PHP	360,529.20
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	63,780.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	424,909.20

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

FOR WINDOW TYPE: ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB, TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual).**

***** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

**** CURRENTLY NO AVAILABLE STOCKS FOR ANGLE BRACKET.**

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:
MARTIN ANTONIO R. FLORES
KMI-SUPERVISOR

Approved By:
MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-07-25-0524
JCY-24%/14K/7K/1.8K/1.3K

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines

July 04, 2025

Darrick Tee

18 Ibsen St. Filinvest Batasan, Quezon City

0977-2707943

jaihanss@yahoo.com

Model	Qty
KL-IF60-G6H1M32	1
KL-IF40-G6H1M32	2
KAG-250WCINV	1
KAG-200WCINV	2
KAG-145WCINV	1

BASEMENT

DINING, KITCHEN	Area ≈ 60 sq.m
-----------------	----------------

ACU 1	6.0hp Floor mounted Inverter	KL-IF60-G6H1M32
	Estimated Pipe Length :	17 ft
	Estimated Royal Cord Length :	22 ft
	Initial Charge	P 14,000.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Indoor Bracket
- Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	3/8"x 5/8"	7 ft	P 400.00 / ft	P 2,800.00
Royal Cord	2.mm2 x 4C	12 ft	P 100.00 / ft	P 1,200.00
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	5 ft	P 70.00 / ft	P 350.00
Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Outdoor Bracket(wall)	fabricated	1 pc(s)	P 5,000.00 / pc	P 5,000.00
Scaffolding	1set	1 lot	P 1,500.00 / lot	P 1,500.00
PVC(Drainline)	blue-3/4'	2 pc(s)	P 150.00	P 300.00
				P 12,150.00

Estimated Charges	P 26,150.00
-------------------	-------------

LIVING AREA	Area ≈ 65 sq.m
-------------	----------------

ACU 2	4.0hp Floor mounted Inverter	KL-IF40-G6H1M32
	Estimated Pipe Length :	10 ft
	Estimated Royal Cord Length :	17 ft
	Initial Charge	P 11,000.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Indoor Bracket
- Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Royal Cord	2.mm2 x 4C	7 ft	P 100.00 / ft	P 700.00
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	5 ft	P 70.00 / ft	P 350.00
Circuit Breaker(NEMA)	40A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Outdoor Bracket(WALL)	Galvanised(larg	1 pc(s)	P 1,650.00 / pc	P 1,650.00
PVC(Drainline)	blue-3/4'	2 pc(s)	P 150.00	P 300.00
				P 4,000.00

Estimated Charges	P 15,000.00
-------------------	-------------

ACU 3 4.0hp Floor mounted Inverter *KL-IF40-G6H1M32*

Estimated Pipe Length : 10 ft

Estimated Royal Cord Length : 15 ft

Initial Charge P 11,000.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Indoor Bracket
- Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Royal Cord	2.mm2 x 4C	5 ft	P 100.00 / ft	P 500.00
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	14 ft	P 70.00 / ft	P 980.00
Circuit Breaker(NEMA)	40A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Outdoor Bracket(WALL)	Galvanised(larg	1 pc(s)	P 1,650.00 / pc	P 1,650.00
PVC(Drainline)	blue-3/4'	2 pc(s)	P 150.00	P 300.00
				P 4,430.00

Estimated Charges	P 15,430.00
--------------------------	-------------------------

GUESTROOM	Area ≈ 17 sq.m
------------------	-----------------------

ACU 4 1.5hp Windowtype Inverter *KAG-145WCINV*

Initial charge P 1,200.00

Angle Bracket P 600.00

Estimated charges	P 1,800.00
--------------------------	------------------------

CHILDREN ROOM 1	Area ≈ 24 sq.m
------------------------	-----------------------

ACU5 2.5hp Windowtype Inverter *KAG-250WCINV*

Initial charge P 1,200.00

Angle Bracket P 600.00

Estimated charges	P 1,800.00
--------------------------	------------------------

CHILDREN ROOM2	Area ≈ 19 sq.m
-----------------------	-----------------------

ACU 6 2.0hp Windowtype Inverter *KAG-200WCINV*

Initial charge P 1,200.00

Angle Bracket P 600.00

Estimated charges	P 1,800.00
--------------------------	------------------------

MASTER BEDROOM	Area ≈ 18 sq.m
-----------------------	-----------------------

ACU7 2.0hp Windowtype Inverter *KAG-200WCINV*

Initial charge P 1,200.00

Angle Bracket P 600.00


Estimated charges	P 1,800.00
--------------------------	------------------------

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Note:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Working days: Monday to Saturday, 8am- 5pm with parking.
- 4 KAG-145WCINV Dimension: W x D x H, = 560 X 708 x 375 mm. (22 x 28 x 15 inches)
- 5 KAG-200WCINV Dimension: W x D x H, = 660 X 700 x 428 mm. (26 x 28 x 17 inches)
- 6 KAG-250WCINV Dimension: W x D x H, = 660 X 800 x 428 mm. (26 x 31.5 x 17 inches)
- 7 Mechanical Plans, Permits, Electrical permits not included.
- 8 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 9 Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , is not included in the scope of work of Kolin.
- 10 **Final charges will be based on actual installation.**

Prepared by:



Jeffrey Dadios

Field Surveyor

Customer Conformance:


Signature Over Printed Name

Reviewed by:



Engr. Kenneth Zamora

Service Supervisor


Field and Shop Supervisor

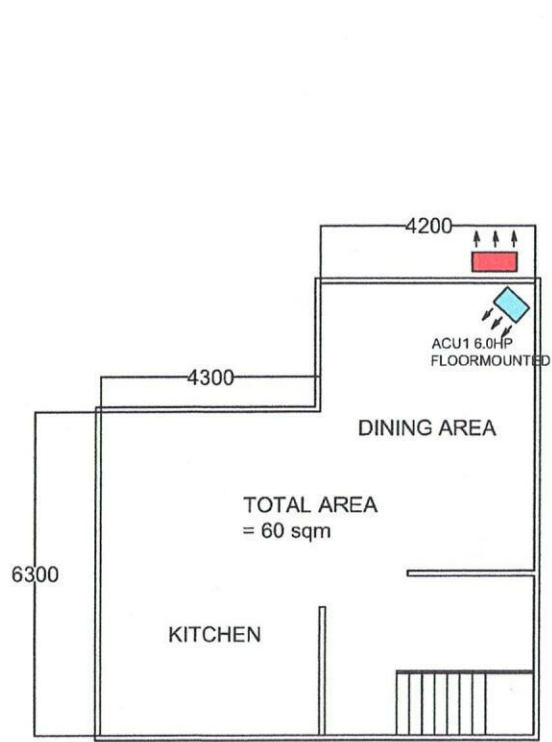

BASEMENT

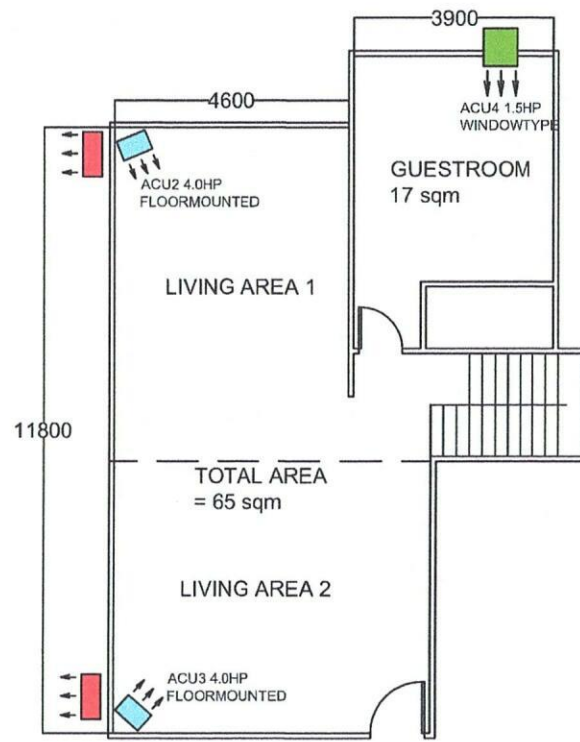

GROUND FLOOR

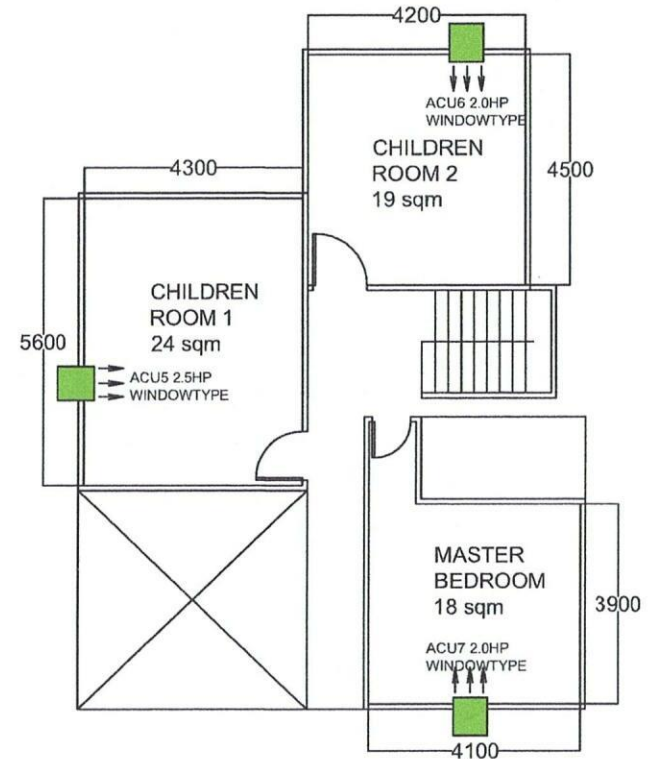

SECOND FLOOR