



June 20, 2025

MR. NESTOR MANAHAN
20 TIMOG AVE. TOYAMA BLDG. ROOM 401, 4TH FLR., BRGY. DILIMAN QUEZON CITY
TEL#: 0918-9005279

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

| QTY | U/M | MODEL / DESCRIPTION | SRP | DISCOUNTED PRICE | | AMOUNT |
|--|--------|---|-----------|------------------|-----|------------|
| 2 | UNIT/S | MODEL: KSG-IWF-30Wfy-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32 | 76,595.00 | 51,212.20 | PHP | 102,424.40 |
| 1 | UNIT/S | MODEL: KSG-IWF-15Wfy-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 12,960 Kj/h (1.5HP) FULL DC INVERTER W/ WIFI R-32 | 46,595.00 | 28,412.20 | PHP | 28,412.20 |
| TOTAL UNIT COST | | | | | PHP | 130,836.60 |
| ESTIMATED COST OF INSTALLATION (please see attached) | | | | | PHP | 143,960.00 |
| OTHERS: DELIVERY CHARGE | | | | | PHP | 600.00 |
| TOTAL ESTIMATED COST OF THE PROJECT | | | | | PHP | 275,396.60 |

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: *** Need to sign waiver agreement due to under capacity of unit choice.

PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,


JANELLEN S. LIM
KMI-ASSISTANT

Noted by:


MART NATHANIEL R. FLORES
KMI-SUPERVISOR

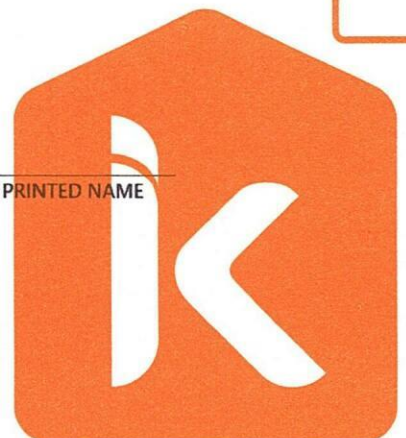
Approved By:


MS. EDITHA M. FLORES
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

KMI-QUOTE-06-25-0460-rev
REG-24%/7K



June 20, 2025
Nestor Manahan
20 Timog Ave. Toyama Bldg, room 401 4th floor Brgy Diliman Quezon City
0918-9005279

| MODEL | Qty |
|---------------------|-----|
| KSG-IWF-30WFY8K1M32 | 2 |
| KSG-IWF-15WFY8K1M32 | 1 |

revision1

| | | |
|------------------------|------|--------|
| Managers Office | Area | 16 sqm |
|------------------------|------|--------|

| | | | | | |
|--------------|-------------------------------------|----------------------------|------------|----------------------|----------------------|
| ACU 1 | 3.0 HP Wall Mounted Inverter | KSG-IWF-30WFY8K1M32 | | | |
| | Estimated Pipe Length = 92 ft | | | | |
| | Estimated Royal Cord Length = 97 ft | | | | |
| | Initial Charge | | | | ₱ 7,700.00 |
| | Includes: | | | | Less Outdoor Bracket |
| | Labor | | | | |
| | 10ft Copper Tube | | | | |
| | 10ft Royal Cord | | | | |
| | Consumables | | | | |
| | Installation Materials | Description | Qty | Price per qty | Subtotal |
| | Copper Tube | Ø 1/4" x Ø 5/8" | 82 ft | ₱ 400.00/ft | ₱ 32,800.00 |
| | Royal Cord (comm. wire) | 2.mm2 x 4C | 87 ft | ₱ 100.00/ft | ₱ 8,700.00 |
| | Royal Cord (ACCU-Breaker) | 3.5mm x 3c | 5 ft | ₱ 60.00/ft | ₱ 300.00 |
| | Circuit Breaker waterproof | 30A / 1Ph | 1 pc/s | ₱ 1,000.00/pc | ₱ 1,000.00 |
| | Rubber Insulation | 2 1/8" x 3/4" x 6' | 9 pc/s | ₱ 350.00/pc | ₱ 3,150.00 |
| | Rubber Insulation | 1 1/8" x 3/4" x 6' | 6 pc/s | ₱ 230.00/pc | ₱ 1,380.00 |
| | PVC (drainline) | blue - 3/4" | 5 pc/s | ₱ 150.00/pc | ₱ 750.00 |
| | Outdoor bracket | Modified | 1 pc/s | ₱ 1,500.00/pc | ₱ 1,500.00 |
| | | | | | ₱ 49,580.00 |

| | |
|--------------------------|-------------|
| Estimated Charges | ₱ 57,280.00 |
|--------------------------|-------------|

| | | |
|---------------|------|--------|
| OFFICE | Area | 38 sqm |
|---------------|------|--------|

| | | | | | |
|--------------|-------------------------------------|----------------------------|------------|----------------------|----------------------|
| ACU 2 | 3.0 HP Wall Mounted Inverter | KSG-IWF-30WFY8K1M32 | | | |
| | Estimated Pipe Length = 76 ft | | | | |
| | Estimated Royal Cord Length = 81 ft | | | | |
| | Initial Charge | | | | ₱ 7,700.00 |
| | Includes: | | | | Less Outdoor Bracket |
| | Labor | | | | |
| | 10ft Copper Tube | | | | |
| | 10ft Royal Cord | | | | |
| | Outdoor Bracket (Wall) | | | | |
| | Consumables | | | | |
| | Installation Materials | Description | Qty | Price per qty | Subtotal |
| | Copper Tube | Ø 1/4" x Ø 5/8" | 66 ft | ₱ 350.00/ft | ₱ 23,100.00 |
| | Royal Cord (comm. wire) | 2.mm2 x 4C | 71 ft | ₱ 100.00/ft | ₱ 7,100.00 |
| | Royal Cord (ACCU-Breaker) | 3.5mm x 3c | 5 ft | ₱ 60.00/ft | ₱ 300.00 |
| | Circuit Breaker waterproof | 30A / 1Ph | 1 pc/s | ₱ 1,000.00/pc | ₱ 1,000.00 |
| | Rubber Insulation | 2 1/8" x 3/4" x 6' | 5 pc/s | ₱ 350.00/pc | ₱ 1,750.00 |
| | Rubber Insulation | 1 1/8" x 3/4" x 6' | 3 pc/s | ₱ 230.00/pc | ₱ 690.00 |
| | PVC (drainline) | blue - 3/4" | 4 pc/s | ₱ 150.00/pc | ₱ 600.00 |
| | Outdoor bracket | Modified | 1 pc/s | ₱ 1,500.00/pc | ₱ 1,500.00 |
| | | | | | ₱ 36,040.00 |

| | |
|--------------------------|-------------|
| Estimated Charges | ₱ 43,740.00 |
|--------------------------|-------------|

CONFERENCE ROOM

Area 11 sqm

ACU 3 1.5 HP Wall Mounted Inverter**KSG-IWF-15Wfy8K1M32**

Estimated Pipe Length = 76 ft

Estimated Royal Cord Length = 81 ft

Initial Charge

₱ 6,700.00

Includes:

Less Outdoor
Bracket

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

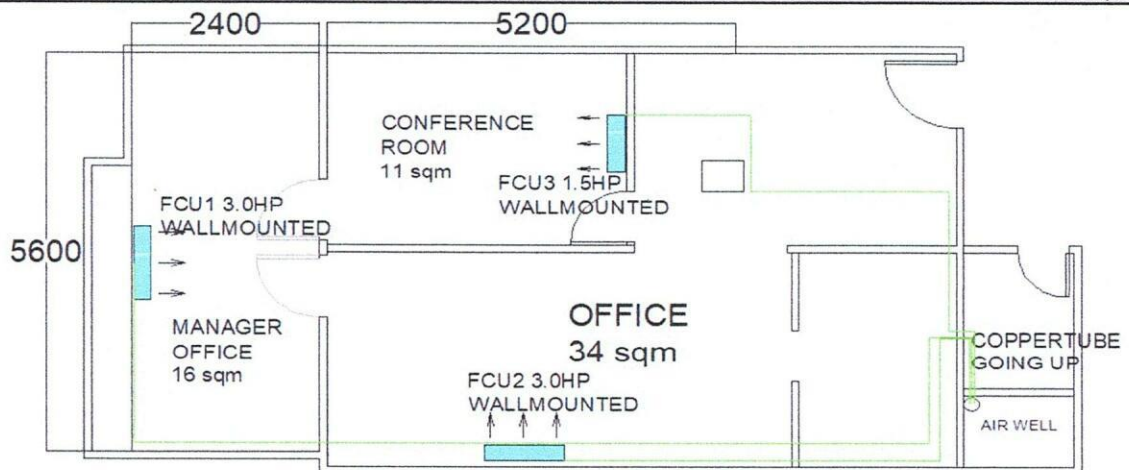
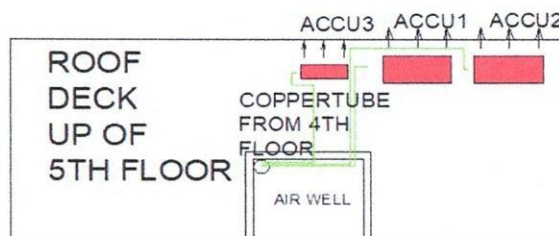
Consumables

Installation Materials

| Description | Qty | Price per qty | Subtotal |
|----------------------------|---------------------------|---------------|--------------------|
| Copper Tube | Ø 1/4" x Ø 3/8" 66 ft | ₱ 350.00/ft | ₱ 23,100.00 |
| Royal Cord (comm. wire) | 2.mm2 x 4C 71 ft | ₱ 100.00/ft | ₱ 7,100.00 |
| Royal Cord (ACCU-Breaker) | 3.5mm x 3c 5 ft | ₱ 60.00/ft | ₱ 300.00 |
| Circuit Breaker waterproof | 30A / 1Ph 1 pc/s | ₱ 1,000.00/pc | ₱ 1,000.00 |
| Rubber Insulation | 2 1/8" x 3/4" x 6' 6 pc/s | ₱ 350.00/pc | ₱ 2,100.00 |
| Rubber Insulation | 1 1/8" x 3/4" x 6' 3 pc/s | ₱ 230.00/pc | ₱ 690.00 |
| PVC (drainline) | blue - 3/4" 3 pc/s | ₱ 150.00/pc | ₱ 450.00 |
| Outdoor bracket | Modified 1 pc/s | ₱ 1,500.00/pc | ₱ 1,500.00 |
| | | | ₱ 36,240.00 |

Estimated Charges

₱ 42,940.00


**4TH FLOOR****5TH FLOOR**

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for marking and site visit before installation.
- 4 Need waiver due to long pipelength, standard pipelength installation is 25 meters or 82 feet.
- 5 Coppertube expose inside the area.
- 6 Working days: Monday to Saturday, 8am- 5pm with parking. Need working permit.
- 7 Mechanical Plans, Permits, Electrical permits not included.
- 8 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 9 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph**, should be provided by customer's contractor.
- 10 **Final charges will be based on actual installation.**

Prepared by:



Jeffrey Dadios

Field Surveyor

Customer Conformance:

Signature Over Printed Name

Reviewed by:


Engr. Kenneth Zamora

Service Supervisor Shop and
Field Operation