

MR. PHILIP YAO
ELECTROWELD BLDG. #249 RIZAL AVE. EXTN. COR. 7TH AVE., GRACE PARK WEST CALOOCAN CITY
TEL#: 0917-5372127
Email: gracelineproducts@yahoo.com

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION (OPTION 2)

* Unit Option 1 *

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSG-IWF-25WFF-8KIM32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	45,436.20	PHP	45,436.20
2	UNIT/S	MODEL: KSG-IWF-20WFF-8KIM32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 19,000 Kj/h (2.0HP) FULL DC INVERTER W/ WIFI R-32	59,595.00	38,292.20	PHP	76,584.40
TOTAL UNIT COST					PHP	122,020.60
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	76,130.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	198,750.60

* Unit Option 2 *

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSM-IW25-WCT10M1M32 KOLIN WALL MOUNTED CERTUS AIRCONDITIONER 23,210 Kj/h (2.5HP) REGULAR INVERTER W/ WIFI R-32	49,995.00	33,996.20	PHP	33,996.20
2	UNIT/S	MODEL: KSM-IW20-WCT10M1M32 KOLIN WALL MOUNTED CERTUS SERIES AIRCONDITIONER 18,990 Kj/h (2.0HP) REGULAR INVERTER R-32	41,995.00	27,916.20	PHP	55,832.40
TOTAL UNIT COST					PHP	89,828.60
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	76,130.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	166,558.60

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual).

*** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

* Subject for actual site visit for final location of units & drain provision.

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:
MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:
MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-06-25-0511
KRC-24%/7K/4K

Conforme: _____
SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines



June 27, 2025

Phillip Yao

Electroweld Bldg. #249 Rizal Ave. Extn. Cor 7th Ave Grace Park West Caloocan City

0917-5372127

gracelineproducts@yahoo.com

MODEL	Qty
KSG-IWF-25WFY8K1M32	1
KSG-IWF-20WFY8K1M32	2

OPTION 2

OFFICE STAFF	Area	45 sqm
---------------------	------	--------

ACU 1	2.0 HP Wall Mounted Inverter	KSG-IWF-20WFY8K1M32			
	Estimated Pipe Length = 53 ft				
	Estimated Royal Cord Length = 58 ft				
	Initial Charge				₱ 7,500.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Wall)				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Copper Tube	Ø 1/4" x Ø 1/2"	43 ft	₱ 350.00/ft	₱ 15,050.00
	Royal Cord (comm. wire)	2.mm2 x 4C	48 ft	₱ 100.00/ft	₱ 4,800.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	Drain Pump TNK		1 pc/s	₱ 2,900.00/pc	₱ 2,900.00
	Drain Pump Hose		53 ft	₱ 10.00/ft	₱ 530.00
	PVC blue	3/4" x 10'	6 pc/s	₱ 150.00/pc	₱ 900.00
					₱ 25,480.00

Estimated Charges	₱ 32,980.00
--------------------------	-------------

ACU 2	2.0 HP Wall Mounted Inverter	KSG-IWF-20WFY8K1M32			
	Estimated Pipe Length = 27 ft				
	Estimated Royal Cord Length = 32 ft				
	Initial Charge				₱ 7,500.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Wall)				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Copper Tube	Ø 1/4" x Ø 1/2"	17 ft	₱ 350.00/ft	₱ 5,950.00
	Royal Cord (comm. wire)	2.mm2 x 4C	22 ft	₱ 100.00/ft	₱ 2,200.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	PVC blue	3/4" x 10'	3 pc/s	₱ 150.00/pc	₱ 450.00
					₱ 10,020.00

Estimated Charges	₱ 17,520.00
--------------------------	-------------

MANAGERS OFFICE

Area 27 sqm

ACU 3 2.5 HP Wall Mounted Inverter**KSG-IWF-25WFY8K1M32**

Estimated Pipe Length = 33 ft

Estimated Royal Cord Length = 38 ft

Initial Charge

₱ 8,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

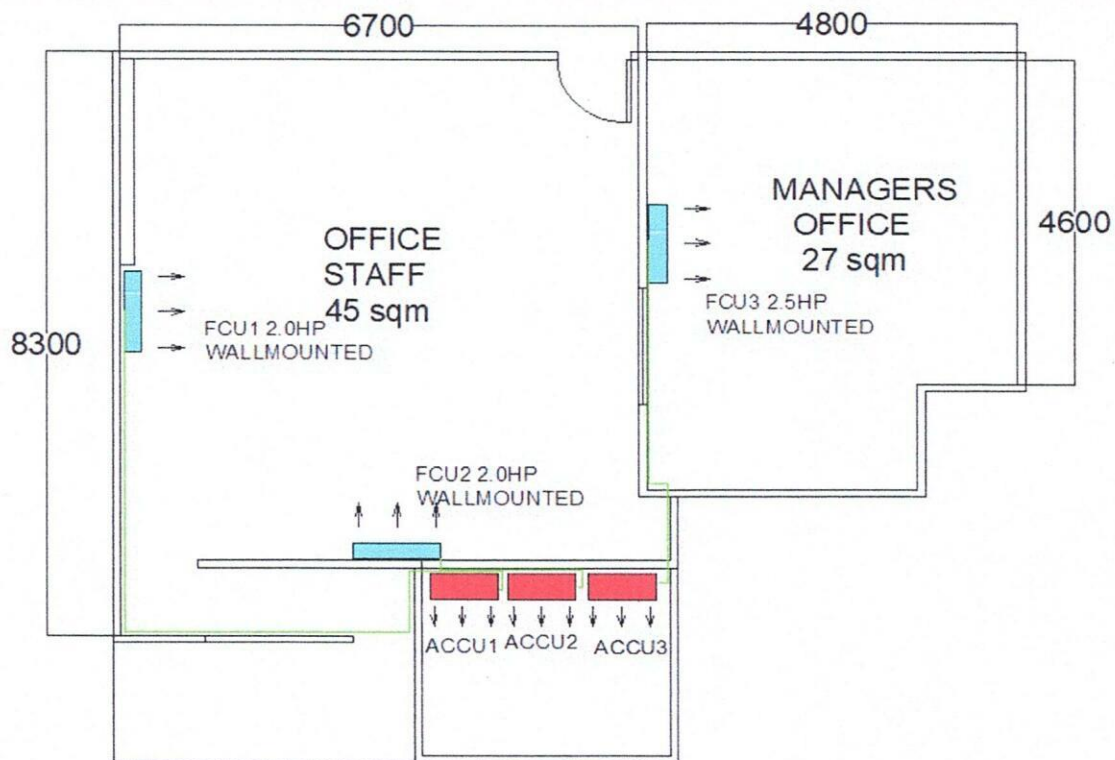
Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	23 ft	₱ 400.00/ft	₱ 9,200.00
Royal Cord (comm. wire)	28 ft	₱ 100.00/ft	₱ 2,800.00
Royal Cord (ACCU-Breaker)	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Drain Pump TNK	1 pc/s	₱ 2,900.00/pc	₱ 2,900.00
Drain Pump Hose	33 ft	₱ 10.00/ft	₱ 330.00
PVC blue	4 pc/s	₱ 150.00/pc	₱ 600.00
			₱ 17,130.00

Estimated Charges

₱ 25,630.00




Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor. Recommendation only
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Coppertube and Drainline expose inside the area. Need for site visit for final location and drain provision.
- 4 ACU1 and ACU2 Need to operate at the same time to avoid undercapacity.
Need drainpump if no drainline provision on each unit.
- 5 ACU3 Need Indoor Backing, not enough space for indoor unit. From ceiling to glass 30cm height only.
- 6 Working days: Monday to Saturday, 8am- 5pm with parking. Need working permit.
- 7 Mechanical Plans, Permits, Electrical permits not included.
- 8 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 9 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1PH**, should be provided by customer's contractor, Outdoor location / Breaker.
- 10 Final charges will be based on actual installation.

Prepared by:



Jeffrey Dadios

Field Surveyor

Customer Conformer:

Signature Over Printed Name

Reviewed by:


Engr. Kenneth Zamora

Service Supervisor Shop and
Field Operation