



March 25, 2025

MAYON ELECTRICAL SUPPLY
685 T. ALONZO ST., CORNER SOLER ST., STA. CRUZ MANILA
TEL#: 0917-8501390

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KL-IF60-G6H1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 58,140 Kj/h (5.0TR) FULL DC INVERTER R32 SINGLE PHASE	165,995.00	126,156.20	PHP	126,156.20
TOTAL UNIT COST					PHP	126,156.20
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	26,365.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	153,121.20

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual).**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

**** CURRENTLY NO AVAILABLE STOCKS FOR THIS MODEL. TENTATIVE ARRIVAL OF STOCKS - 2ND WEEK OF APRIL.**

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-03-25-0226
ECY-24%

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines



Customer Name : MAXIM ELECTRICAL SUPPLY Date : 3-24-25
 Address : 688 T. XLOVED ST. CORNER SOUTH ST. STR. CORNER SJR No. : 247014

Establishment Type : Residential Area Surveyed : _____
 Commercial Area Surveyed : STORE

Recommended Product Model : KL-1F60-5611M32

Cooling Capacity Computation

Floor Area : 35 sqm.
 Ceiling Height : 3.3 mtr. **note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed.**

Floor Area :	<u>35</u>	x	550 Btu/h	<u>19,250</u>	Btu/h
Ceiling Height (excess of 3 mtrs.) :	<u>3.3</u>	x	20%	<u>3,850</u>	Btu/h
Window Direct Sunlight		x	20% - 50%	<u>9,625</u>	Btu/h
Total Cooling Capacity				<u>32,725</u>	Btu/h

Add : Additional Heat Load

No. of Person	<u>15</u>	x	300 Btu/h	<u>4,500</u>	Btu/h
No. of Ordinary Light (<40w)	<u>12</u>	x	200 Btu/h	<u>2,400</u>	Btu/h
No. of Special Light (>40w)		x	400 Btu/h		Btu/h
No. of Refrigerator (< 6 cu.ft.)		x	400 Btu/h		Btu/h
No. of Refrigerator (> 6 cu.ft.)		x	800 Btu/h		Btu/h
No. of Cooking Range		x	1500 Btu/h		Btu/h
No. of Laptop Computer		x	150 Btu/h		Btu/h
No. of Desktop Computer <u>1pc</u>		x	400 Btu/h	<u>400</u>	Btu/h
No. of Printer		x	500 Btu/h		Btu/h
No. of Photocopier		x	1000 Btu/h		Btu/h
Total Cooling Capacity				<u>7,300</u>	Btu/h

Recommended Cooling Capacity 40,025 Btu/h


Note : Compressor warranty will be **reduced to** ____ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.

Scope of Work Agreement

- 1. Copper tube lay-out Expose Embedded
- 2. Chipping Included Not Included
- 3. Fabricated Bracket Yes Shop Site No
- 4. Service Ledge Yes No
- 5. Dismantling of existing Aircon Included Not Included
- 6. Ducting Yes No

Dimension : _____

- 7. Plastering, carpentry and restoration works are to be done by the customer.
- 8. Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
- 9. Processing of mechanical plan, working permit, electrical permit are to be done by the customer.
- 10. Other concern: INDOOR BRACKET HGT: 30cm (11 INCH) 1 FOOT
CUSTOMER NEED TO PROVIDE POWER SUPPLY
AT THE OUTDOOR LOCATION - FABRICATED OUTDOOR
BRACKET. CUSTOMER USE PIPE (TIMBX FOR OPPOSITE)

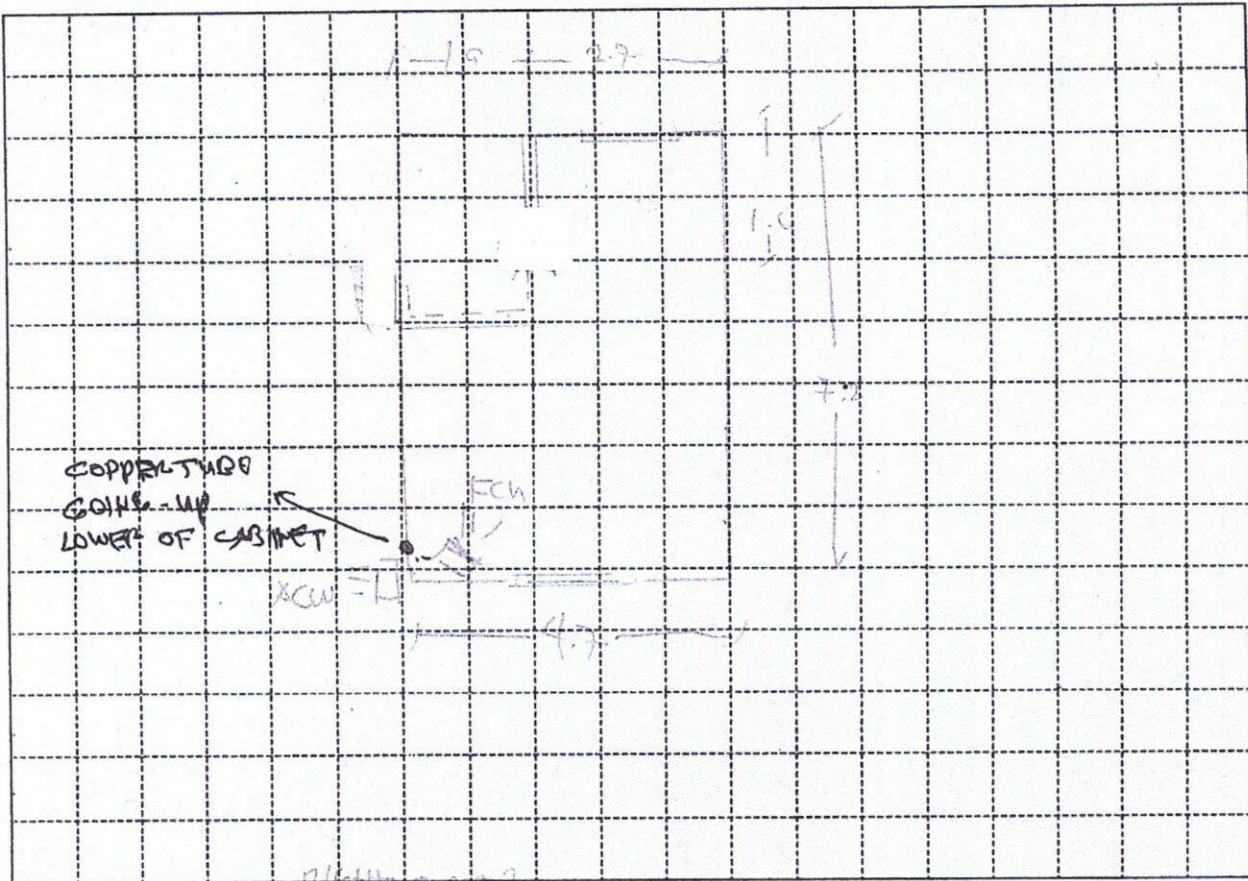

Indoor Unit Location : OF AXON

Outdoor Unit Location : AT THE COLUMN, FACING THAT (BACK/WP PORTION)

Pipe Length : 17 FT

Special Note : _____

Installation Cost Estimate			
Material Description	Qty.	Unit Cost	Total Cost
Copper Tube (excess of 10 ft.) 2330, 2430, 2520, 3520, 4620	7 FT	400	2800
Wire (Royal Cord-signal wire) (excess of 10ft.) 2.0mmx4C	14 FT	100	1400
Wire (Royal Cord - Breaker to ODU) 3.5mm / 5.5mm x 3C	7 FT	100	700
Circuit Breaker 20A, 30A, 40A/1ph, 40A/3ph	1	1000	1000
Bracket (ODU) (Imptd. / Fabricated) ; (Floor / Wall)	1	500	500
Bracket (WAC) Angle Type			
PVC Pipe (drain) 1/2" (3/4")			
PVC Pipe (electrical) 3/4", 1"			
Drain Pump			
Drain F. Hose	7 FT	25	175
SCAFFOLDING	2 SETS		1500
Dismantling Fee (existing air-conditioner)			1400
Initial Charge			
TOTAL ESTIMATE		P 26,365	7 (26,365)

- Note :**
- Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials.
 - Survey fee will be **deducted** in the installation fee.

Prepared by: [Signature]
 Signature Over Printed Name

Customer Conforme: _____
 Signature Over Printed Name