



March 5, 2025

PATTS COLLEGE OF AERONAUTICS
LOMBOS ST., BRGY. SAN ISIDRO, PARAÑAQUE CITY
TEL#: 825-8823 / 825-8824

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

* ACCREDITATION ROOM

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
2	UNIT/S	MODEL: KLM-IS60-AA1M32 KOLIN CEILING CASSETTE AIRCONDITIONER 55,503 Kj/h (5.0TR) DC INVERTER R-32 SINGLE PHASE	154,995.00	117,796.20	PHP	235,592.40
TOTAL UNIT COST					PHP	235,592.40
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	132,400.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	368,592.40

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR CEILING CASSETTE (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual).

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-03-25-0165
REG-24%

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.
1854 Sta. Rita St., Guadalupe Nuevo, Makati City
Tel.: (632) 8852-6473
Fax: (632) 8852-2170 / (632) 8852-4792
www.kolinphil.com.ph / kolinphilippines



MARCH 04, 2025
 PATTS COLLEGE OF AERONAUTICS
 Lombos St. Brgy. San Isidro, Paranaque City
 825-8823, 825-8824

MODEL
 KLM-IS60-AAM32-I

QUANTITY
 2

INSIDE ROOM	Area ≈ 75 sq.m
--------------------	----------------


ACU 1 6.0hp Ceiling Cassette Inverter		KLM-IS60-AAM32-I	
Estimated Pipe Length	: 66	ft	
Estimated Royal Cord Length	: 73	ft	
Initial Charge			P 15,000.00
Includes:			
Labor			
10ft Copper Tube			
10ft Royal Cord			
Indoor bracket (full thread)			
Other Consumables			
Additional Charges	Description	Unit	Price Per Unit
Copper Tube	3/8"x 5/8"	56 ft	P 400.00 / ft
Royal Cord	2.mm2 x 4C	63 ft	P 100.00 / ft
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft	P 70.00 / ft
Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s)	P 1,000.00 / pc
Rubber Insulation	2 1/8"x3/4" x 6'	9 pc(s)	P 350.00 / pc
Rubber Insulation	1 1/8"x3/4" x 6'	5 pc(s)	P 150.00 / pc
Full Thread	3 meters	6 pc(s)	P 150.00 / pc
Pipe hanger	3 inches	10 pc(s)	P 120.00 / pc
Outdoor Bracket(floor)	fabricated	1 pc(s)	P 2,500.00 / pc
PVC(Drainline)	blue-1 inch	4 pc(s)	P 200.00 / pc
Dismantle	5 tonner	1 pc(s)	P 6,000.00 / pc
			Subtotal
			P 45,490.00

Estimated Charges	P 60,490.00
--------------------------	--------------------

OUTSIDE ROOM	Area ≈ 82 sq.m
---------------------	----------------

ACU 2 2.0hp Ceiling Cassette Inverter		KLM-IS60-AAM32-I	
Estimated Pipe Length	: 86	ft	
Estimated Royal Cord Length	: 93	ft	
Initial Charge			P 15,000.00
Includes:			
Labor			
10ft Copper Tube			
10ft Royal Cord			
Indoor bracket (full thread)			
Other Consumables			
Additional Charges	Description	Unit	Price Per Unit
Copper Tube	3/8"x 5/8"	76 ft	P 400.00 / ft
Royal Cord	2.mm2 x 4C	83 ft	P 100.00 / ft
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft	P 70.00 / ft
Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s)	P 1,000.00 / pc
Rubber Insulation	2 1/8"x3/4" x 6'	12 pc(s)	P 350.00 / pc
Rubber Insulation	1 1/8"x3/4" x 6'	5 pc(s)	P 150.00 / pc
Full Thread	3 meters	5 pc(s)	P 150.00 / pc
Pipe hanger	3 inches	16 pc(s)	P 120.00 / pc
PVC(Drainline)	blue-1 inch	3 pc(s)	P 200.00 / pc
Outdoor Bracket(floor)	fabricated	1 pc(s)	P 2,500.00 / pc
Dismantle	5 tonner	1 pc(s)	P 6,000.00 / pc
			Subtotal
			P 56,910.00

Estimated Charges	P 71,910.00
--------------------------	--------------------

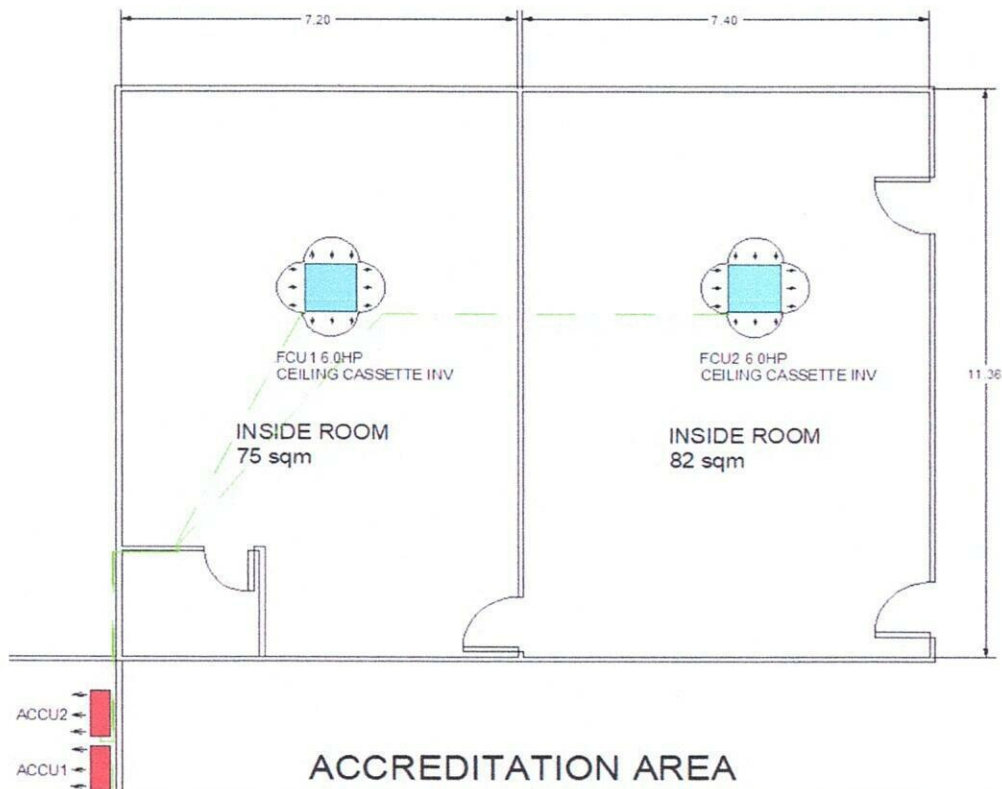

Total Estimated Charges

P 132,400.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Note:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for marking and site visit before installation.
- 4 Coppertube expose going inside the ceiling, customer make a manhole in the ceiling.
- 5 Working days: Monday to Saturday, 8am- 5pm with parking. 6 pax
- 6 Mechanical Plans, Permits, Electrical permits not included.
- 7 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 8 Electrical power supply (feeder line) **220v/ 60hz/ 1ph**, is not included in the scope of work of Kolin.
- 9 **Final charges will be based on actual installation.**

Prepared by:

Jeffrey Dadios
Field Surveyor

Customer Conformer:

Signature Over Printed Name

Reviewed by:

Engr. Kenneth Zamora
Service Supervisor