



March 11, 2026

BENBY ENTERPRISES
2BENBY BLDG., 917 BANAWA BRGY. SANTO CRISTO, QUEZON CITY
TEL#: 0927-9560857

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KL-IF60-G6H1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 58,140 Kj/h (5.0TR) FULL DC INVERTER R32 SINGLE PHASE	168,995.00	114,436.20	PHP	114,436.20
TOTAL UNIT COST					PHP	114,436.20
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	23,165.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	138,201.20

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

BANK DETAILS:

- ** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.
- * Unit/s & Delivery: Account Name - KOLIN MARKETING INC. / Account# - 011808002307 (BDO-KALAYAAN)
- * Installation: Will be provided by assigned installer.

WARRANTY:

FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.


** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (Final charges will be based on actual works).


We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_astt@kolinphil.com.ph

Very Truly Yours,


 JANELLEN S. LIM
 KMI-ASSISTANT

Noted by:

 MART HAMIEL R. FLORES
 KMI-SUPERVISOR

Approved By:

 MS. EDITHA M. FLORES
 AVP - FINANCE

KMI-QUOTE-03-26-0131
NG-24%/14K

Conforme: _____
SIGNATURE OVER PRINTED NAME



March 11, 2026
 BENBY ENTERPRISES
 2Benby Bldg,917 Banawe Brgy Santo Cristo, District Quezon City

MODEL QUANTITY
 KL-IF60-G6H1M32 1

RECEPTION/ LOBBY Area ≈ 105 sq.m

ACU 6.0hp Floor mounted Inverter *KL-IF60-G6H1M32*
 Estimated Pipe Length : 10 ft
 Estimated Royal Cord Length : 17 ft
 Initial Charge P 14,000.00
 Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Indoor Bracket
 Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Royal Cord	2.mm2 x 4C	5 ft	P 100 / ft	P 500
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft	P 70 / ft	P 490
Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s)	P 1,000 / pc	P 1,000
Outdoor Bracket(modify)	fabricated	1 pc(s)	P 1,500 / pc	P 1,500
Leaktest	3/8" x 5/8" existing	1 set	P 2,000	P 2,000
Dismantle	5tr/ 7.0hp	1 pc(s)	P 3,500 / pc	P 3,500
Drain Hose	White -1/2"	7 ft	P 25 / ft	P 175
				P 9,165.00

Estimated Charges P 23,165.00

Total Estimated Charges P 23,165.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Note:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need to have a opening side of the unit for the air intake . 6 inches depth
- 4 Need to open/ manhole in ceiling for the lay-out of new Coppertube and wires.
- 5 Leak test existing coppertube 3/8" x 5/8".
- 6 Need waiver due to undercapacity.
- 6 Working days: Monday to Saturday, 9am- 5pm with parking.Need working permit.Bring harness and rope.
- 7 Mechanical Plans, Permits, Electrical permits not included.
- 8 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 9 Electrical power supply (feeder line) 230v/ 60hz/ 1ph is not included in the scope of work of Kolin.
- 10 Final charges will be based on actual installation.

Prepared by:

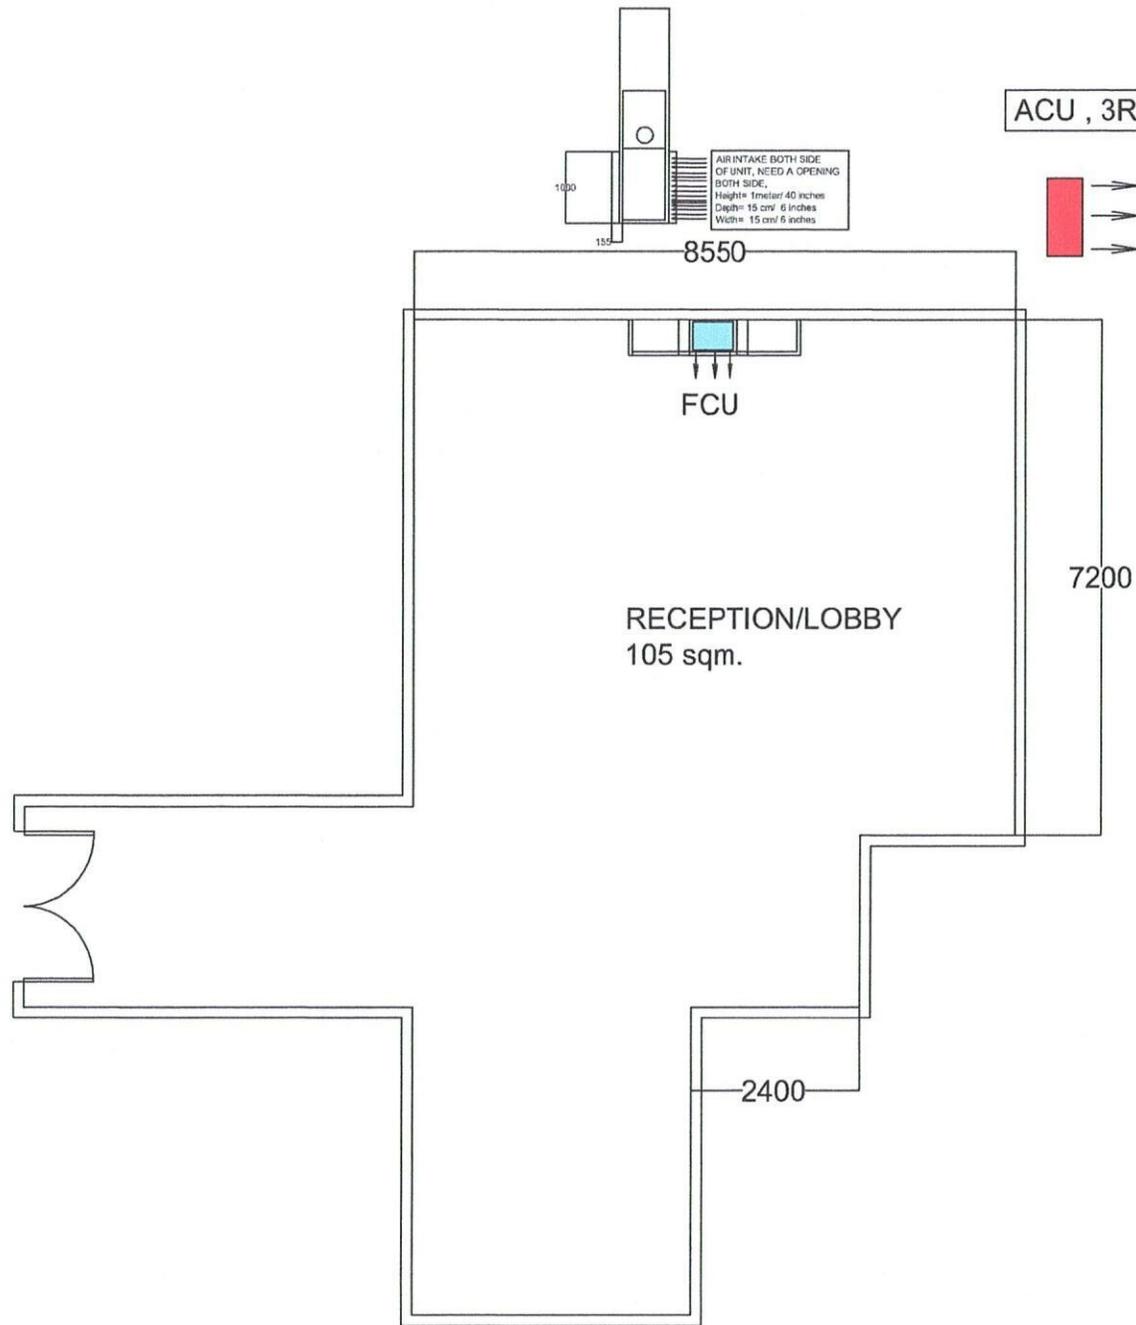
Jeoffrey Dadios
 Field Surveyor

Customer Conformer:

 Signature Over Printed Name


Reviewed by:

Engr. Adrian B. Nogoy
 Project Engineer
 03/11/2026



ACU , 3RD FLOOR LOCATION

AIR INTAKE BOTH SIDE OF UNIT, NEED A OPENING BOTH SIDE,
 Height= 1meter/ 40 inches
 Depth= 15 cm/ 6 inches
 Width= 15 cm/ 6 inches



8550

FCU

RECEPTION/LOBBY
 105 sqm.

7200

2400



PROJECT TITLE:
 AIR CONDITIONING SYSTEM – COMMERCIAL INSTALLATION

PROJECT LOCATION:
 2Benby Bldg,917 Banawe Brgy Santo Cristo, District Quezon City

PROJECT OWNER:
 BENBY ENTERPRISES

SHEET CONTENTS
 AC SYSTEM LAYOUT

DRAWN BY : JD
CHECKED BY : AN

SHEET NO.
 A
 01
 01
PROJ NO.

March 11, 2026
BENBY ENTERPRISES
 2Benby Bldg, 917 Banawe Brgy Santo Cristo, District Quezon City
 Contact
 Email

Please be informed that the air-conditioner you intend to purchase is under capacity as compared to the following unit that we proposed:

Area	Kolin's Recommendation	Customer's Choice	Remarks
RECEPTION / LOBBY	KL-IF 40-G6H1M32	KL-IF60-G6H1M32	Calculated 8.3hp under by 2.3 hp
	2 UNITS		


Since the unit of your choice is under capacity, it is probable that you may experience the following:

1. Capacity of the unit to cool the area will take longer or it will not cool the area at all that may lead to your dissatisfaction with the cooling performance of our unit.
2. Power consumption will be higher due to frequent running of compressor for not reaching the desired temperature within the normal parameter.
3. Useful life of compressor will be shortened due to excessive running beyond the normal run cycle.

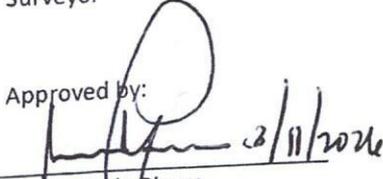
Considering the above conditions, we regret to inform you that we cannot guarantee the efficient performance of unit. **Also, One (1) year warranty for parts (compressor-1year).**

For your guidance and information

Prepared by:


 Jeffrey Dadios
 Surveyor

Approved by:


 Mr. Alvin de Rivera
 Service Manager

Noted by:


 03/11/2026
 Engr. Adrian E. Nogoy
 Project Engineer

Customer Conforme:

Signature Over Printed Name