



March 13, 2026

ELORDE COVERED COURT
8343 DR. A. SANTOS AVE., ELORDE SPORTS CENTER, BRGY. SUCAT, PARAÑAQUE CITY
TEL#: 0917-5591824 / 0919-8514228 (ENGR. LLOYD)

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
15	UNIT/S	MODEL: KL-IF60-G6H1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 58,140 Kj/h (5.0TR) FULL DC INVERTER R32 SINGLE PHASE	168,995.00	114,436.20	PHP	1,716,543.00
TOTAL UNIT COST					PHP	1,716,543.00
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	389,225.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	2,105,768.00

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

BANK DETAILS:

- * Unit/s & Delivery: Account Name - KOLIN MARKETING INC. / Account# - 011808002307 (BDO-KALAYAAN)
- * Installation: Will be provided by assigned installer.
- ** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.

WARRANTY:

FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

- PRICES IS VAT INCLUSIVE.
- ** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph


Very Truly Yours,


 JANELLEN S. LIM
 KMI-ASSISTANT

Noted By:

 MARCIAL DANIEL R. FLORES
 KMI-SUPERVISOR

Approved By:


 MS. EDITHA M. FLORES
 AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

KMI-QUOTE-03-26-0138
REG-24%/14K



March 12, 2026
 Elorde Covered Court
 8343 Dr. A. Santos Ave. Elorde Sports Center, brgy Sucat Paranaque City
 0917-5591824 / 0919-8514228- Engr. Lloyd

MODEL QUANTITY
 KL-IF60-G6H1M32 15

COVERED COURT Area ≈ 765 sq.m

ACU 1 **6.0hp Floor mounted Inverter** *KL-IF60-G6H1M32*
 Estimated Pipe Length : 10 ft
 Estimated Royal Cord Length : 17 ft
 Initial Charge P 14,000.00
 Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Indoor Bracket
 Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Royal Cord	2.mm2 x 4C	7 ft	P 100 / ft	P 700
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft	P 70 / ft	P 490
Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s)	P 1,000 / pc	P 1,000
Outdoor Bracket(Wall)	fabricated	1 pc(s)	P 5,000 / pc	P 5,000
PVC (Drainline)	blue 3/4"	1 pc(s)	P 150 / pc	P 150
Drain Hose	White -1/2"	7 ft	P 25 / ft	P 175 P <u>7,515.00</u>

Estimated Charges P **21,515.00**

ACU 2 **6.0hp Floor mounted Inverter** *KL-IF60-G6H1M32*
 Estimated Pipe Length : 10 ft
 Estimated Royal Cord Length : 17 ft
 Initial Charge P 14,000.00
 Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Indoor Bracket
 Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Royal Cord	2.mm2 x 4C	7 ft	P 100 / ft	P 700
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft	P 70 / ft	P 490
Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s)	P 1,000 / pc	P 1,000
Outdoor Bracket(wall)	fabricated	1 pc(s)	P 5,000 / pc	P 5,000
PVC (Drainline)	blue 3/4"	1 pc(s)	P 150 / pc	P 150
Drain Hose	White -1/2"	7 ft	P 25 / ft	P 175 P <u>7,515.00</u>

Estimated Charges P **21,515.00**

ACU 3 **6.0hp Floor mounted Inverter** *KL-IF60-G6H1M32*
 Estimated Pipe Length : 10 ft
 Estimated Royal Cord Length : 17 ft
 Initial Charge P 14,000.00
 Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Indoor Bracket
 Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Royal Cord	2.mm2 x 4C	7 ft	P 100 / ft	P 700
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft	P 70 / ft	P 490
Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s)	P 1,000 / pc	P 1,000
Outdoor Bracket(wall)	fabricated	1 pc(s)	P 5,000 / pc	P 5,000
PVC (Drainline)	blue 3/4"	1 pc(s)	P 150 / pc	P 150
Drain Hose	White -1/2"	7 ft	P 25 / ft	P 175 P <u>7,515.00</u>

Estimated Charges P **21,515.00**

ACU 4 6.0hp Floor mounted Inverter

KL-IF60-G6H1M32

Estimated Pipe Length : 10 ft
 Estimated Royal Cord Length : 17 ft

Initial Charge P 14,000.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Indoor Bracket
- Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Royal Cord	2.mm2 x 4C	7 ft	P 100 / ft	P 700
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft	P 70 / ft	P 490
Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s)	P 1,000 / pc	P 1,000
Outdoor Bracket(wall)	fabricated	1 pc(s)	P 5,000 / pc	P 5,000
PVC (Drainline)	blue 3/4"	1 pc(s)	P 150 / pc	P 150
Drain Hose	White -1/2"	7 ft	P 25 / ft	P 175 P
				7,515.00

Estimated Charges	P 21,515.00
--------------------------	--------------------

ACU 5 6.0hp Floor mounted Inverter

KL-IF60-G6H1M32

Estimated Pipe Length : 10 ft
 Estimated Royal Cord Length : 17 ft

Initial Charge P 14,000.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Indoor Bracket
- Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Royal Cord	2.mm2 x 4C	7 ft	P 100 / ft	P 700
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft	P 70 / ft	P 490
Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s)	P 1,000 / pc	P 1,000
Outdoor Bracket(wall)	fabricated	1 pc(s)	P 5,000 / pc	P 5,000
PVC (Drainline)	blue 3/4"	1 pc(s)	P 150 / pc	P 150
Drain Hose	White -1/2"	7 ft	P 25 / ft	P 175 P
				7,515.00

Estimated Charges	P 21,515.00
--------------------------	--------------------

ACU 6 6.0hp Floor mounted Inverter

KL-IF60-G6H1M32

Estimated Pipe Length : 10 ft
 Estimated Royal Cord Length : 17 ft

Initial Charge P 14,000.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Indoor Bracket
- Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Royal Cord	2.mm2 x 4C	7 ft	P 100 / ft	P 700
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft	P 70 / ft	P 490
Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s)	P 1,000 / pc	P 1,000
Outdoor Bracket(wall)	fabricated	1 pc(s)	P 5,000 / pc	P 5,000
PVC (Drainline)	blue 3/4"	1 pc(s)	P 150 / pc	P 150
Drain Hose	White -1/2"	7 ft	P 25 / ft	P 175 P
				7,515.00

Estimated Charges	P 21,515.00
--------------------------	--------------------

ACU 7 6.0hp Floor mounted Inverter

KL-IF60-G6H1M32

Estimated Pipe Length : 10 ft
 Estimated Royal Cord Length : 17 ft

Initial Charge P 14,000.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Indoor Bracket
- Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Royal Cord	2.mm2 x 4C	7 ft	P 100 / ft	P 700
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft	P 70 / ft	P 490
Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s)	P 1,000 / pc	P 1,000
Outdoor Bracket(wall)	fabricated	1 pc(s)	P 5,000 / pc	P 5,000
PVC (Drainline)	blue 3/4"	1 pc(s)	P 150 / pc	P 150
Drain Hose	White -1/2"	7 ft	P 25 / ft	P 175 P
				7,515.00

Estimated Charges	P 21,515.00
--------------------------	--------------------

ACU 8 6.0hp Floor mounted Inverter

KL-IF60-G6H1M32

Estimated Pipe Length : 10 ft
 Estimated Royal Cord Length : 17 ft

Initial Charge P 14,000.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Indoor Bracket
- Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Royal Cord	2.mm2 x 4C	7 ft	P 100 / ft	P 700
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft	P 70 / ft	P 490
Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s)	P 1,000 / pc	P 1,000
Outdoor Bracket(wall)	fabricated	1 pc(s)	P 5,000 / pc	P 5,000
PVC (Drainline)	blue 3/4"	1 pc(s)	P 150 / pc	P 150
Drain Hose	White -1/2"	7 ft	P 25 / ft	P 175 P
				7,515.00

Estimated Charges	P 21,515.00
--------------------------	--------------------

ACU 9 6.0hp Floor mounted Inverter **KL-IF60-G6H1M32**
 Estimated Pipe Length : 10 ft
 Estimated Royal Cord Length : 17 ft
 Initial Charge P 14,000.00
 Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Indoor Bracket
 Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Royal Cord	2.mm2 x 4C	7 ft	P 100 / ft	P 700
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft	P 70 / ft	P 490
Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s)	P 1,000 / pc	P 1,000
Outdoor Bracket(wall)	fabricated	1 pc(s)	P 5,000 / pc	P 5,000
PVC (Drainline)	blue 3/4"	1 pc(s)	P 150 / pc	P 150
Drain Hose	White -1/2"	7 ft	P 25 / ft	P 175 P
				7,515.00

Estimated Charges P **21,515.00**

ACU 10 6.0hp Floor mounted Inverter **KL-IF60-G6H1M32**
 Estimated Pipe Length : 10 ft
 Estimated Royal Cord Length : 17 ft
 Initial Charge P 14,000.00
 Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Indoor Bracket
 Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Royal Cord	2.mm2 x 4C	7 ft	P 100 / ft	P 700
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft	P 70 / ft	P 490
Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s)	P 1,000 / pc	P 1,000
Outdoor Bracket(wall)	fabricated	1 pc(s)	P 5,000 / pc	P 5,000
PVC (Drainline)	blue 3/4"	1 pc(s)	P 150 / pc	P 150
Drain Hose	White -1/2"	7 ft	P 25 / ft	P 175 P
				7,515.00

Estimated Charges P **21,515.00**

ACU 11 6.0hp Floor mounted Inverter **KL-IF60-G6H1M32**
 Estimated Pipe Length : 60 ft
 Estimated Royal Cord Length : 67 ft
 Initial Charge P 14,000.00
 Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Indoor Bracket
 Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	3/8"x 5/8"	50 ft	P 400 / ft	P 20,000
Royal Cord	2.mm2 x 4C	57 ft	P 100 / ft	P 5,700
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft	P 70 / ft	P 490
Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s)	P 1,000 / pc	P 1,000
Outdoor Bracket(wall)	fabricated	1 pc(s)	P 5,000 / pc	P 5,000
PVC (Drainline)	blue 3/4"	1 pc(s)	P 150 / pc	P 150
Drain Hose	White -1/2"	7 ft	P 25 / ft	P 175 P
				32,515.00

Estimated Charges P **46,515.00**

ACU 12 6.0hp Floor mounted Inverter *KL-IF60-G6H1M32*

Estimated Pipe Length : 50 ft
 Estimated Royal Cord Length : 57 ft

Initial Charge P 14,000.00

Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Indoor Bracket
 Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	3/8"x 5/8"	40 ft	P 400 / ft	P 16,000
Royal Cord	2.mm2 x 4C	47 ft	P 100 / ft	P 4,700
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft	P 70 / ft	P 490
Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s)	P 1,000 / pc	P 1,000
Outdoor Bracket(wall)	fabricated	1 pc(s)	P 5,000 / pc	P 5,000
PVC (Drainline)	blue 3/4"	1 pc(s)	P 150 / pc	P 150
Drain Hose	White -1/2"	7 ft	P 25 / ft	P 175
				27,515.00

Estimated Charges P **41,515.00**

ACU 13 6.0hp Floor mounted Inverter *KL-IF60-G6H1M32*

Estimated Pipe Length : 40 ft
 Estimated Royal Cord Length : 47 ft

Initial Charge P 14,000.00

Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Indoor Bracket
 Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	3/8"x 5/8"	30 ft	P 400 / ft	P 12,000
Royal Cord	2.mm2 x 4C	37 ft	P 100 / ft	P 3,700
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft	P 70 / ft	P 490
Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s)	P 1,000 / pc	P 1,000
Outdoor Bracket(wall)	fabricated	1 pc(s)	P 5,000 / pc	P 5,000
PVC (Drainline)	blue 3/4"	1 pc(s)	P 150 / pc	P 150
Drain Hose	White -1/2"	7 ft	P 25 / ft	P 175
				22,515.00

Estimated Charges P **36,515.00**

ACU 14 6.0hp Floor mounted Inverter *KL-IF60-G6H1M32*

Estimated Pipe Length : 23 ft
 Estimated Royal Cord Length : 30 ft

Initial Charge P 14,000.00

Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Indoor Bracket
 Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	3/8"x 5/8"	13 ft	P 400 / ft	P 5,200
Royal Cord	2.mm2 x 4C	20 ft	P 100 / ft	P 2,000
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft	P 70 / ft	P 490
Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s)	P 1,000 / pc	P 1,000
Outdoor Bracket(wall)	fabricated	1 pc(s)	P 5,000 / pc	P 5,000
PVC (Drainline)	blue 3/4"	1 pc(s)	P 150 / pc	P 150
Drain Hose	White -1/2"	7 ft	P 25 / ft	P 175
				14,015.00

Estimated Charges P **28,015.00**

ACU 15 6.0hp Floor mounted Inverter

KL-IF60-G6H1M32

Estimated Pipe Length : 10 ft
 Estimated Royal Cord Length : 17 ft
 Initial Charge

P 14,000.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Indoor Bracket
- Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Royal Cord	2.mm2 x 4C	7 ft	P 100 / ft	P 700
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft	P 70 / ft	P 490
Circuit Breaker(NEMA)	60A/ 1Ph	1 pc(s)	P 1,000 / pc	P 1,000
Outdoor Bracket(wall)	fabricated	1 pc(s)	P 5,000 / pc	P 5,000
PVC (Drainline)	blue 3/4"	1 pc(s)	P 150 / pc	P 150
Drain Hose	White -1/2"	7 ft	P 25 / ft	P 175
				7,515.00

Estimated Charges	P	21,515.00
--------------------------	----------	------------------

Total Estimated Charges	P	389,225.00
--------------------------------	----------	-------------------

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Note:

- 1 Location based in floor plan only. Recommendation only for approval of customer and contractor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for marking and site visit before installation. Coppertube expose in the area.
- 4 Need to operate the unit at the same time to avoid undercapacity.
- 5 Unit recommendation base on Area computation submit to be verify / confirm by customer for recompute the aircon capacity.
- 6 Working days: Monday to Saturday, 8am- 5pm with parking. Need working permit.
- 7 Mechanical Plans, Permits, Electrical permits not included.
- 8 Defectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 9 Electrical power supply (feeder line) **230v/ 60hz/ 1ph** is not included in the scope of work of Kolin. **Outdoor Location.**
- 10 **Final charges will be based on actual installation.**


Prepared by:

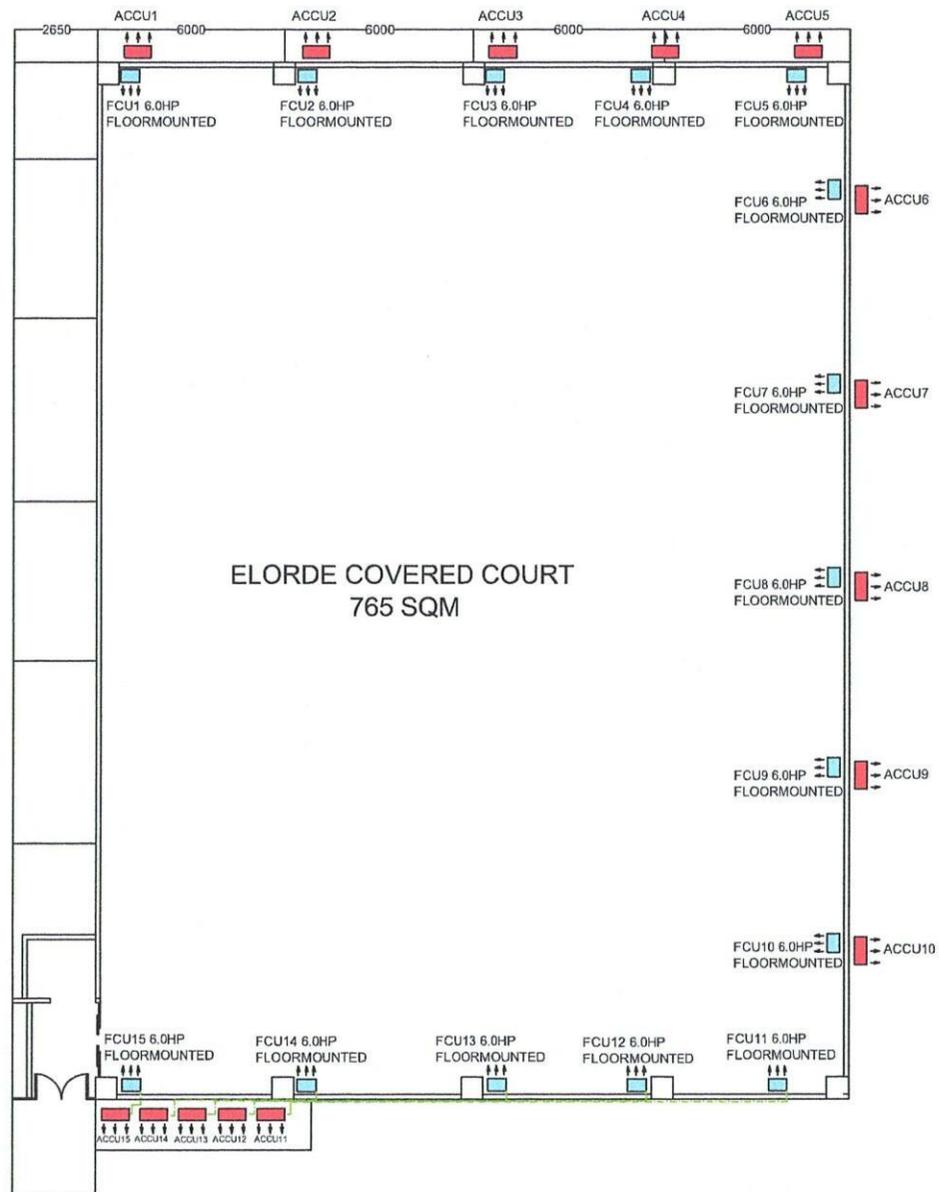
Customer Conformance:

Jeoffrey Dadios
Field Surveyor

Signature Over Printed Name

Reviewed by:

 03/13/2026
Engr. Adrian B. Nogoy
Project Engineer



PROJECT TITLE:

AIR CONDITIONING SYSTEM – COMMERCIAL INSTALLATION

PROJECT LOCATION:

8343 Dr. A. Santos Ave. Elorde Sports Center, brgy Sucat Paranaque City

PROJECT OWNER:

ELORDE COVERED COURT

SHEET CONTENTS

AC SYSTEM LAYOUT

DRAWN BY : JD

CHECKED BY : AN

SHEET NO.

A

01

01

PROJ NO.