



March 10, 2026

MR. MARC CHING CHUAHIOK
 LOT 8, BLOCK 2, FIREFLY ST., VALLE VERDE 7 BRGY. UGONG, PASIG CITY
 TEL#: 0917-5874924

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

| QTY | U/M | MODEL / DESCRIPTION | SRP | DISCOUNTED PRICE | | AMOUNT |
|--|--------|---|------------|------------------|-----|------------|
| 2 | UNIT/S | MODEL: KS-IW20-MCA11201M32 KOLIN WALL MOUNTED CERTUS A/ SERIES AIRCONDITIONER 19,000 Kj/h (2.0HP) FULL DC INVERTER W/ WIFI R-32 | 42,995.00 | 26,176.20 | PHP | 52,352.40 |
| 2 | UNIT/S | MODEL: KSG-IWF-30WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32 | 78,095.00 | 52,352.20 | PHP | 104,704.40 |
| 1 | UNIT/S | MODEL: KAG-200WCINV KOLIN WINDOW TYPE QUAD SERIES AIRCONDITIONER 19,080 Kj/h (2.0HP) FULL DC INVERTER W/ WIFI R-32 (WxDxH) 26"x28"x17" | 44,195.00 | 31,788.20 | PHP | 31,788.20 |
| 2 | UNIT/S | MODEL: KAG-250WCINV KOLIN WINDOW TYPE QUAD SERIES AIRCONDITIONER 24,120 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32 (WxDxH) 26"x31.5"x17" | 49,495.00 | 35,816.20 | PHP | 71,632.40 |
| 1 | UNIT/S | MODEL: KAM-200DRC32 KOLIN WINDOW TYPE REGULAR COMPACT AIRCONDITIONER 19,518 Kj/h (2.0HP) NON-INVERTER WITH REMOTE R-32 (WxDxH) 26"x27"x17" | 31,595.00 | 22,812.20 | PHP | 22,812.20 |
| 1 | UNIT/S | MODEL: KL-IF40-G6H1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 38,466 Kj/h (3.0TR) FULL DC INVERTER R32 SINGLE PHASE | 108,995.00 | 72,336.20 | PHP | 72,336.20 |
| 1 | UNIT/S | MODEL: KL-IF60-G6H1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 58,140 Kj/h (5.0TR) FULL DC INVERTER R32 SINGLE PHASE | 168,995.00 | 114,436.20 | PHP | 114,436.20 |
| TOTAL UNIT COST | | | | | PHP | 470,062.00 |
| ESTIMATED COST OF INSTALLATION (please see attached) | | | | | PHP | 318,360.00 |
| TOTAL ESTIMATED COST OF THE PROJECT | | | | | PHP | 788,422.00 |

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

BANK DETAILS:

- ** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.
- * Unit/s & Delivery: Account Name - KOLIN MARKETING INC. / Account# - 011808002307 (BDO-KALAYAAN)
- * Installation: Will be provided by assigned installer.

WARRANTY:

- FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.
- FOR WINDOW TYPE (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB, TEN (10) YEARS WARRANTY ON COMPRESSOR.
- FOR WINDOW TYPE (manual): ONE (1) YEAR FREE PARTS AND LABOR, TEN (10) YEARS WARRANTY ON COMPRESSOR.
- FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

- PRICES IS VAT INCLUSIVE.
- ** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (Final charges will be based on actual works).

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.
 If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

** This quotation is based on provided floor plan only, subject for actual survey once location is available.

Very Truly Yours,

JANELLEN S. LIM
 KMI-ASSISTANT

Noted By:
 MARTA HANIELA R. FLORES
 KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
 AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

KMI-QUOTE-03-26-0125
 MMC-24%/6.5K/7K/1.8K/1.2K/10.5K/14K



Kolin Marketing, Inc.
 1854 Sta. Rita St., Guadalupe Nuevo, Makati City
 Tel.: (632) 8852-6473
 Fax: (632) 8852-2170 / (632) 8852-4792
 www.kolinphil.com.ph / kolinphilippines

| | | | |
|--------------------------|---|--------------|---------------|
| Customer Name: | MR. MARC CHING CHUAHIOCK | Date: | March 9, 2026 |
| Customer Address: | LOT 8, BLOCK 2, FIREFLY STREET, VALLE VERDE 7, BARANGAY UGONG, PASIG CITY | | |

| Qty | Unit Model | Unit Capacity/Type |
|-----|---------------------|-------------------------------|
| 2 | KS-IW20-MCAI1201M32 | 2.0HP Wall Mounted Inverter |
| 2 | KSG-IWF-30Wfy8K1M32 | 3.0HP Wall Mounted Inverter |
| 1 | KAG-200WCINV | 2.0HP Window Type Inverter |
| 2 | KAG-250WCINV | 2.5HP Window Type Inverter |
| 1 | KAM-200DRC32 | 2.0HP Window Type Regular |
| 1 | KL-IF40-G6H1M32 | 4.0HP Floor Standing Inverter |
| 1 | KL-IF60-G6H1M32 | 6.0HP Floor Standing Inverter |

GROUND FLOOR

| | | | |
|--------------------|--------------------|----------------------------|-----------------------------|
| Location/s: | Entertainment Room | Area: | 16.00 sqm. |
| ACU #: | 01 | Unit Model: | KS-IW20-MCAI1201M32 |
| | | Unit Capacity/Type: | 2.0HP Wall Mounted Inverter |

| | | | |
|-----------------------------|---|----|------------|
| Estimated Pipe Length | = | 64 | ft |
| Estimated Royal Cord Length | = | 69 | ft |
| Initial Charge | | | ₱ 7,500.00 |
| 10ft Copper tube | | | |
| 10ft Royal Cord | | | |
| Outdoor bracket Wall/Floor | | | |
| Consumables | | | |
| Testing and Commissioning | | | |

| Installation Materials | Specification | Qty | Price per qty | Subtotal |
|-------------------------------|-----------------------|-------|---------------|-------------|
| Insulated Copper tube | 1/2"Ø x 1/4"Ø | 54 ft | ₱ 350.00 /ft | ₱ 18,900.00 |
| Royal Cord (Comm wire) | 2.0 sq.mm x 4c | 59 ft | 100.00 /ft | 5,900.00 |
| Royal Cord (Power Supply) | (#12) 3.5 sqmm. x 3c | 5 ft | 60.00 /ft | 300.00 |
| Circuit Breaker Weather Proof | 30Amps / 1Ph | 1 pc | 1,000.00 /pc | 1,000.00 |
| Outdoor Unit Bracket Type | Kolin Bracket (Wall) | 1 set | /set | |
| Pipe Hanger Assembly | Clamp and Full thread | 8 pc | 420.00 /pc | 3,360.00 |
| Rubber Insulation | 2½" x 3/4" x 6' | 11 pc | ₱ 650.00 /pc | ₱ 7,150.00 |
| Estimated Charges | | | | ₱ 44,110.00 |

| | | | |
|--------------------|----------------|----------------------------|-----------------------------|
| Location/s: | Formal Kitchen | Area: | 30.00 sqm. |
| ACU #: | 02 | Unit Model: | KSG-IWF-30Wfy8K1M32 |
| | | Unit Capacity/Type: | 3.0HP Wall Mounted Inverter |

| | | | |
|-----------------------------|---|----|------------|
| Estimated Pipe Length | = | 75 | ft |
| Estimated Royal Cord Length | = | 80 | ft |
| Initial Charge | | | ₱ 8,500.00 |
| 10ft Copper tube | | | |
| 10ft Royal Cord | | | |
| Outdoor bracket Wall/Floor | | | |
| Consumables | | | |
| Testing and Commissioning | | | |

| Installation Materials | Specification | Qty | Price per qty | Subtotal |
|-------------------------------|-----------------------|-------|---------------|-------------|
| Insulated Copper tube | 5/8"Ø x 1/4"Ø | 65 ft | ₱ 400.00 /ft | ₱ 26,000.00 |
| Royal Cord (Comm wire) | 2.0 sq.mm x 4c | 70 ft | 100.00 /ft | 7,000.00 |
| Royal Cord (Power Supply) | (#12) 3.5 sqmm. x 3c | 5 ft | 60.00 /ft | 300.00 |
| Circuit Breaker Weather Proof | 30Amps / 1Ph | 1 pc | 1,000.00 /pc | 1,000.00 |
| Outdoor Unit Bracket Type | Kolin Bracket (Wall) | 1 set | /set | |
| Pipe Hanger Assembly | Clamp and Full thread | 10 pc | 420.00 /pc | 4,200.00 |
| Rubber Insulation | 2½" x 3/4" x 6' | 12 pc | ₱ 650.00 /pc | ₱ 7,800.00 |
| Estimated Charges | | | | ₱ 54,800.00 |

| | | | |
|--|---------------------------|----------------------------|-------------------------------|
| Location/s: | Dining Area | Area: | 30.00 sqm. |
| ACU #: | 03A | Unit Model: | KL-IF40-G6H1M32 |
| | | Unit Capacity/Type: | 4.0HP Floor Standing Inverter |
| Estimated Pipe Length = 64 ft Estimated Royal Cord Length = 69 ft Initial Charge ₱ 11,000.00 10ft Copper tube 10ft Royal Cord Indoor bracket (floor) Consumables Testing and Commissioning | | | |
| Installation Materials | Specification | Qty | Price per qty |
| Insulated Copper tube | 5/8" ϕ x 3/8" ϕ | 54 ft | ₱ 400.00 /ft |
| Royal Cord (Comm wire) | 2.0 sq.mm x 4c | 59 ft | 100.00 /ft |
| Royal Cord (Power Supply) | (#10) 5.5 sqmm. x 3c | 5 ft | 70.00 /ft |
| Circuit Breaker Weather Proof | 40Amps / 1Ph | 1 pc | 1,000.00 /pc |
| Outdoor Unit Bracket Type | Fabricated wall | 1 set | 5,000.00 /set |
| Pipe Hanger Assembly | Clamp and Full thread | 8 pc | 420.00 /pc |
| Rubber Insulation | 2 1/4" x 3/4" x 6' | 11 pc | ₱ 650.00 /pc |
| Estimated Charges | | | ₱ 55,360.00 |

| | | | |
|---|---------------------------|----------------------------|-------------------------------|
| Location/s: | Living Area | Area: | 89.00 sqm. |
| ACU #: | 03B | Unit Model: | KL-IF60-G6H1M32 |
| | | Unit Capacity/Type: | 6.0HP Floor Standing Inverter |
| Estimated Pipe Length = 99 ft Estimated Royal Cord Length = 104 ft Initial Charge ₱ 14,000.00 10ft Copper tube 10ft Royal Cord Indoor bracket (floor) Consumables Testing and Commissioning | | | |
| Installation Materials | Specification | Qty | Price per qty |
| Insulated Copper tube | 5/8" ϕ x 3/8" ϕ | 89 ft | ₱ 400.00 /ft |
| Royal Cord (Comm wire) | 2.0 sq.mm x 4c | 94 ft | 100.00 /ft |
| Royal Cord (Power Supply) | (#10) 5.5 sqmm. x 3c | 5 ft | 70.00 /ft |
| Circuit Breaker Weather Proof | 60Amps / 1Ph | 1 pc | 1,000.00 /pc |
| Outdoor Unit Bracket Type | Fabricated wall | 1 set | 5,000.00 /set |
| Pipe Hanger Assembly | Clamp and Full thread | 14 pc | 420.00 /pc |
| Rubber Insulation | 2 1/4" x 3/4" x 6' | 16 pc | ₱ 650.00 /pc |
| Estimated Charges | | | ₱ 81,630.00 |

| | | | |
|---|----------------------|----------------------------|----------------------------|
| Location/s: | Guestroom | Area: | 22.00 sqm. |
| WAC #: | 01 | Unit Model: | KAG-200WCINV |
| | | Unit Capacity/Type: | 2.0HP Window Type Inverter |
| Estimated Pipe Length = _____ ft Estimated Royal Cord Length = _____ ft Initial Charge ₱ 1,200.00 10ft Copper tube 10ft Royal Cord | | | |
| Installation Materials | Specification | Qty | Price per qty |
| WAC Angle Bracket | | 1 set | 450.00 /set |
| Estimated Charges | | | ₱ 1,650.00 |

2ND FLOOR

| Location/s: | Ante Room | Area: | 19.00 sqm. | |
|---|-----------------------|----------------------------|-----------------------------|-------------|
| ACU #: | 04 | Unit Model: | KS-IW20-MCAI1201M32 | |
| | | Unit Capacity/Type: | 2.0HP Wall Mounted Inverter | |
| Estimated Pipe Length = 75 ft Estimated Royal Cord Length = 80 ft Initial Charge ₱ 7,500.00 10ft Copper tube 10ft Royal Cord Outdoor bracket Wall/Floor Consumables Testing and Commisioning | | | | |
| Installation Materials | Specification | Qty | Price per qty | Subtotal |
| Insulated Copper tube | 1/2"Ø x 1/4"Ø | 65 ft | ₱ 350.00 /ft | ₱ 22,750.00 |
| Royal Cord (Comm wire) | 2.0 sq.mm x 4c | 70 ft | 100.00 /ft | 7,000.00 |
| Royal Cord (Power Supply) | (#12) 3.5 sqmm. x 3c | 5 ft | 60.00 /ft | 300.00 |
| Circuir Breaker Weather Proof | 30Amps / 1Ph | 1 pc | 1,000.00 /pc | 1,000.00 |
| Outdoor Unit Bracket Type | Kolin Bracket (Wall) | 1 set | /set | |
| Pipe Hanger Assembly | Clamp and Full thread | 10 pc | 420.00 /pc | 4,200.00 |
| Rubber Insulation | 2½" x 3/4" x 6' | 12 pc | ₱ 650.00 /pc | ₱ 7,800.00 |
| Estimated Charges | | | | ₱ 50,550.00 |

| Location/s: | Master's Bedroom | Area: | 33.00 sqm. | |
|---|-----------------------|----------------------------|-----------------------------|-------------|
| ACU #: | 05 | Unit Model: | KSG-IWF-30WFY8K1M32 | |
| | | Unit Capacity/Type: | 3.0HP Wall Mounted Inverter | |
| Estimated Pipe Length = 31 ft Estimated Royal Cord Length = 36 ft Initial Charge ₱ 8,500.00 10ft Copper tube 10ft Royal Cord Outdoor bracket Wall/Floor Consumables Testing and Commisioning | | | | |
| Installation Materials | Specification | Qty | Price per qty | Subtotal |
| Insulated Copper tube | 5/8"Ø x 1/4"Ø | 21 ft | ₱ 400.00 /ft | ₱ 8,400.00 |
| Royal Cord (Comm wire) | 2.0 sq.mm x 4c | 26 ft | 100.00 /ft | 2,600.00 |
| Royal Cord (Power Supply) | (#12) 3.5 sqmm. x 3c | 5 ft | 60.00 /ft | 300.00 |
| Circuir Breaker Weather Proof | 30Amps / 1Ph | 1 pc | 1,000.00 /pc | 1,000.00 |
| Outdoor Unit Bracket Type | Kolin Bracket (Wall) | 1 set | /set | |
| Pipe Hanger Assembly | Clamp and Full thread | 3 pc | 420.00 /pc | 1,260.00 |
| Rubber Insulation | 2½" x 3/4" x 6' | 5 pc | ₱ 650.00 /pc | ₱ 3,250.00 |
| Estimated Charges | | | | ₱ 25,310.00 |

| | | | | |
|---|-----|----------------------|--------------|--|
| Location/s: | Gym | | Area: | 13.00 sqm. |
| WAC #: | 02 | Unit Model: | KAM-200DRC32 | Unit Capacity/Type: 2.0HP Window Type Regular |
| Estimated Pipe Length = _____ ft Estimated Royal Cord Length = _____ ft Initial Charge ₱ 1,200.00 10ft Copper tube 10ft Royal Cord | | | | |
| Installation Materials | | Specification | Qty | Price per qty |
| WAC Angle Bracket | | | 1 set | 450.00 /set |
| Estimated Charges | | | | ₱ 1,650.00 |

| | | | | |
|---|-----------|----------------------|--------------|---|
| Location/s: | Bedroom 1 | | Area: | 34.00 sqm. |
| WAC #: | 03 | Unit Model: | KAG-250WCINV | Unit Capacity/Type: 2.5HP Window Type Inverter |
| Estimated Pipe Length = _____ ft Estimated Royal Cord Length = _____ ft Initial Charge ₱ 1,200.00 10ft Copper tube 10ft Royal Cord | | | | |
| Installation Materials | | Specification | Qty | Price per qty |
| WAC Angle Bracket | | | 1 set | 450.00 /set |
| Estimated Charges | | | | ₱ 1,650.00 |

| | | | | |
|---|-----------|----------------------|--------------|---|
| Location/s: | Bedroom 2 | | Area: | 32.00 sqm. |
| WAC #: | 04 | Unit Model: | KAG-250WCINV | Unit Capacity/Type: 2.5HP Window Type Inverter |
| Estimated Pipe Length = _____ ft Estimated Royal Cord Length = _____ ft Initial Charge ₱ 1,200.00 10ft Copper tube 10ft Royal Cord | | | | |
| Installation Materials | | Specification | Qty | Price per qty |
| WAC Angle Bracket | | | 1 set | 450.00 /set |
| Estimated Charges | | | | ₱ 1,650.00 |


| | | | | |
|--------------------------------|--|--|--|--------------|
| Total Estimated Charges | | | | ₱ 318,360.00 |
|--------------------------------|--|--|--|--------------|

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Indoor Location based in floor plan only.
- 2 Proposed copper tube lay out (green color) location for outdoor units (red color) based on floor plan are subject for approval.
- 3 AC drain line will be provided by the customer's contractor.
- 4 Assumed ceiling height on all rooms are 2.7 meters.
- 5 Mechanical Plans, Permits, Electrical permits not included.
- 6 Issuance of waiver for air conditioning units states that are undersized in relation to the floor plan's specified allowable model type per area, this also may result to reduced the compresor warranty
- 6 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 7 Air conditioning drain line and Electrical power supply (feeder line) 230v/ 60hz/ 1ph, should be provided by customer's contractor.
- 8 Final charges will be based on actual installation.

Prepared by:


03/10/2026
Engr. Ashraf Nogy
Project Engineer
Service Department

Noted by:


3/10
Mr. Alvis De Rivera
Service Manager
Service Department

Customer Name : MR. MARC CHING CHUAHIOCK
 Customer Address : LOT 8, BLOCK 2, FIREFLY STREET, VALLE VERDE 7, BARANGAY UGONG, PASIG CITY

Date: March 9, 2025


Please be informed that the air-conditioner you intend to purchase is under capacity as compared to the following unit that we proposed:
 Since the unit of your choice is under capacity, it is probable that you may experience the following;

1. Capacity of the unit to cool the area will take longer or it will not cool the area at all that may lead to your dissatisfaction with the cooling performance of our unit.
2. Power consumption will be higher due to frequent running of compressor for not reaching the desired temperature within the normal parameter.
3. Useful life of compressor will be shortened due to excessive running beyond the normal run cycle.

Considering the conditions stated above, we regret to inform you that the efficient performance of the unit cannot be guaranteed. Furthermore, the warranty coverage shall be as follows:


| Location | Area | Recommendation | | | Customer's Choice / Based on floor plan | | | Remarks | Compressor Warranty (years) |
|-------------|--------|----------------|---------------------|------------------|---|-----------------------------------|------------------|--|-----------------------------|
| | | Qty | Unit Capacity/Type | Model | Qty | Unit Capacity/Type | Model | | |
| Living Area | 89 sqm | 2 | 4.0HP Floor Mounted | KLG-IF40-G6H1M32 | 1 | 6.0HP Floor Mounted (As per plan) | KLG-IF60-G6H1M32 | Computed capacity 7.1 HP, undersize capacity by 1.1 HP | 1 |

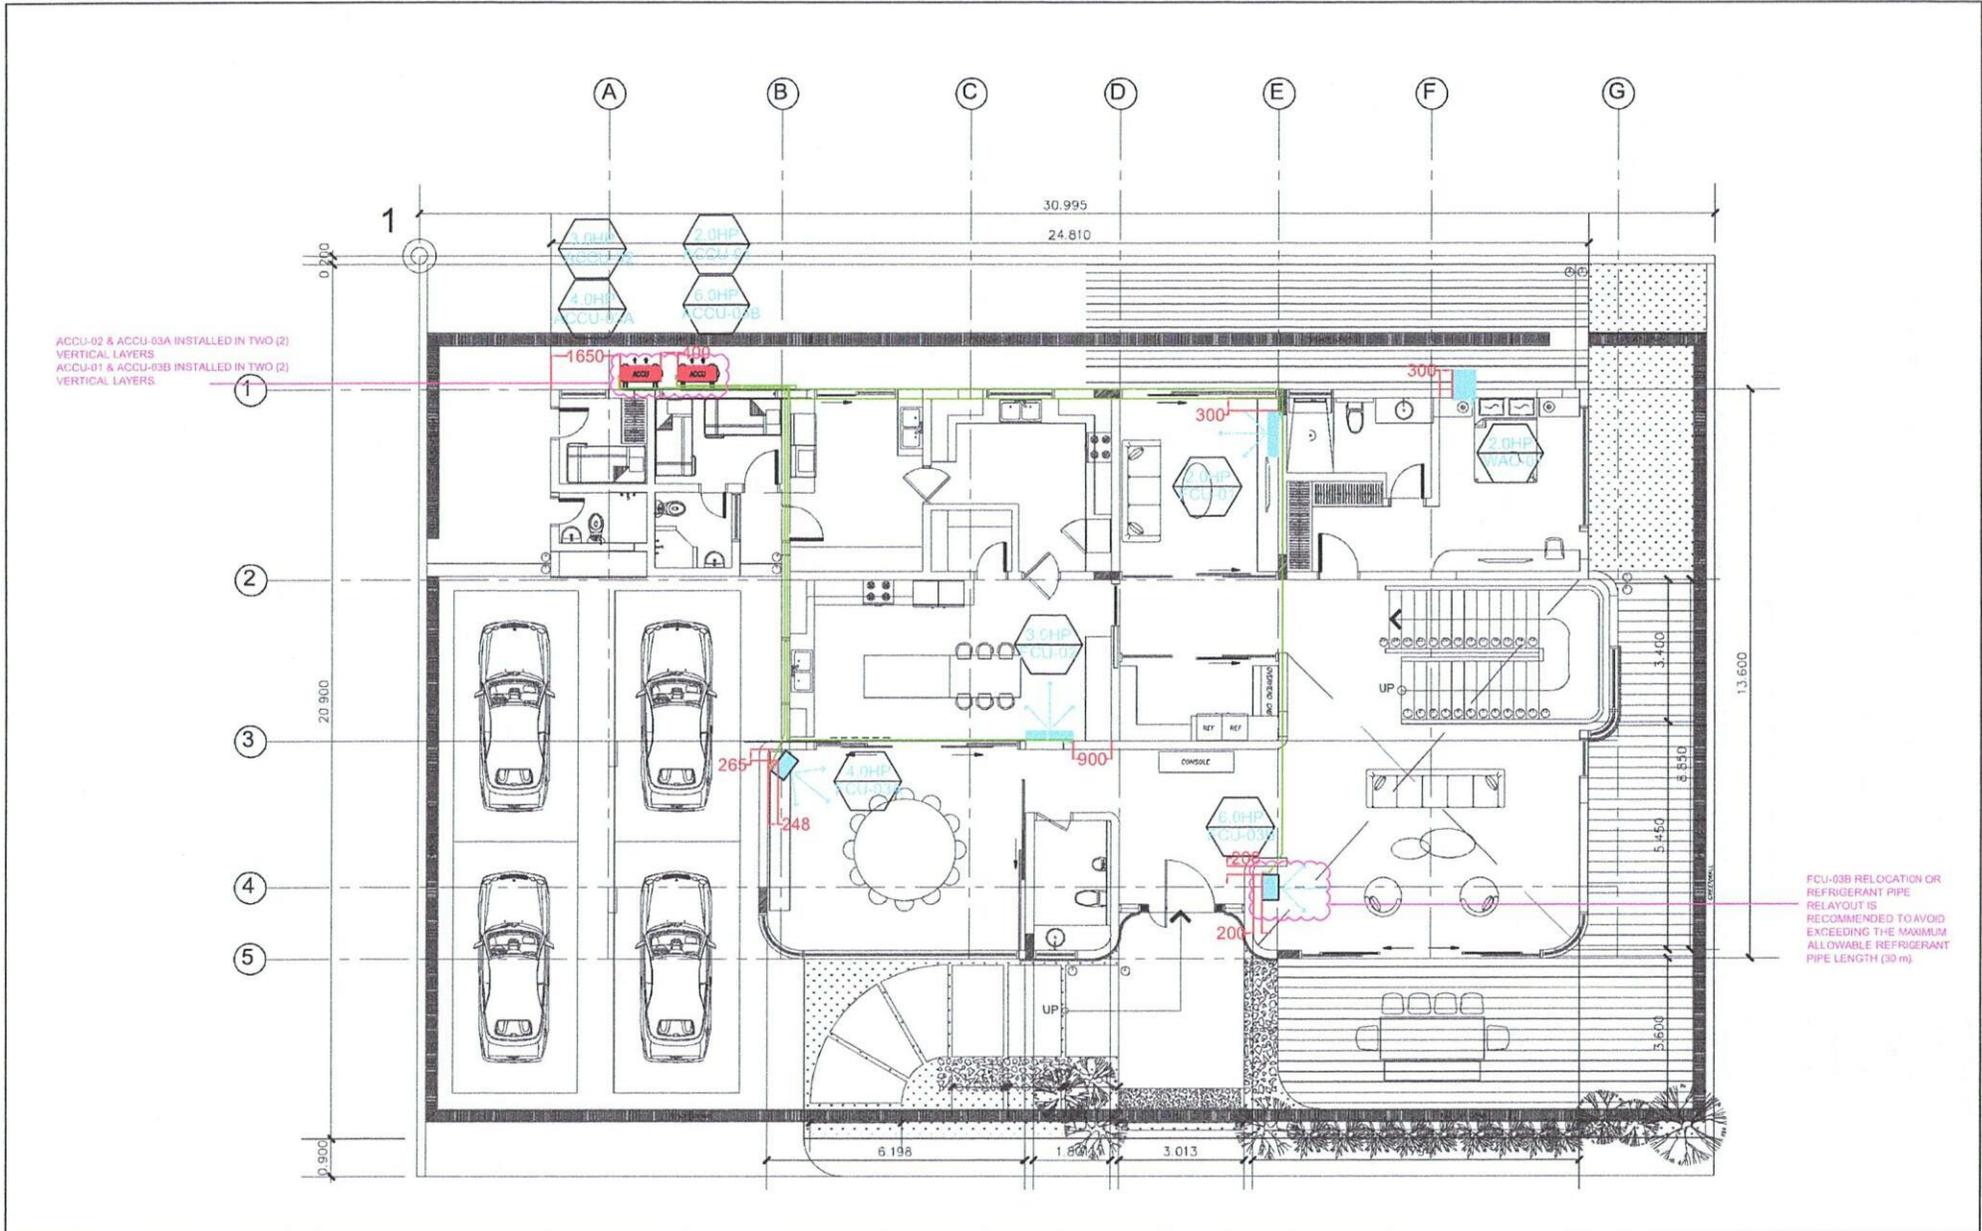
For your guidance and information

Prepared by:

 03/09/2026
 Engr. Arhan Nojo
 Project Engineer
 Service Department

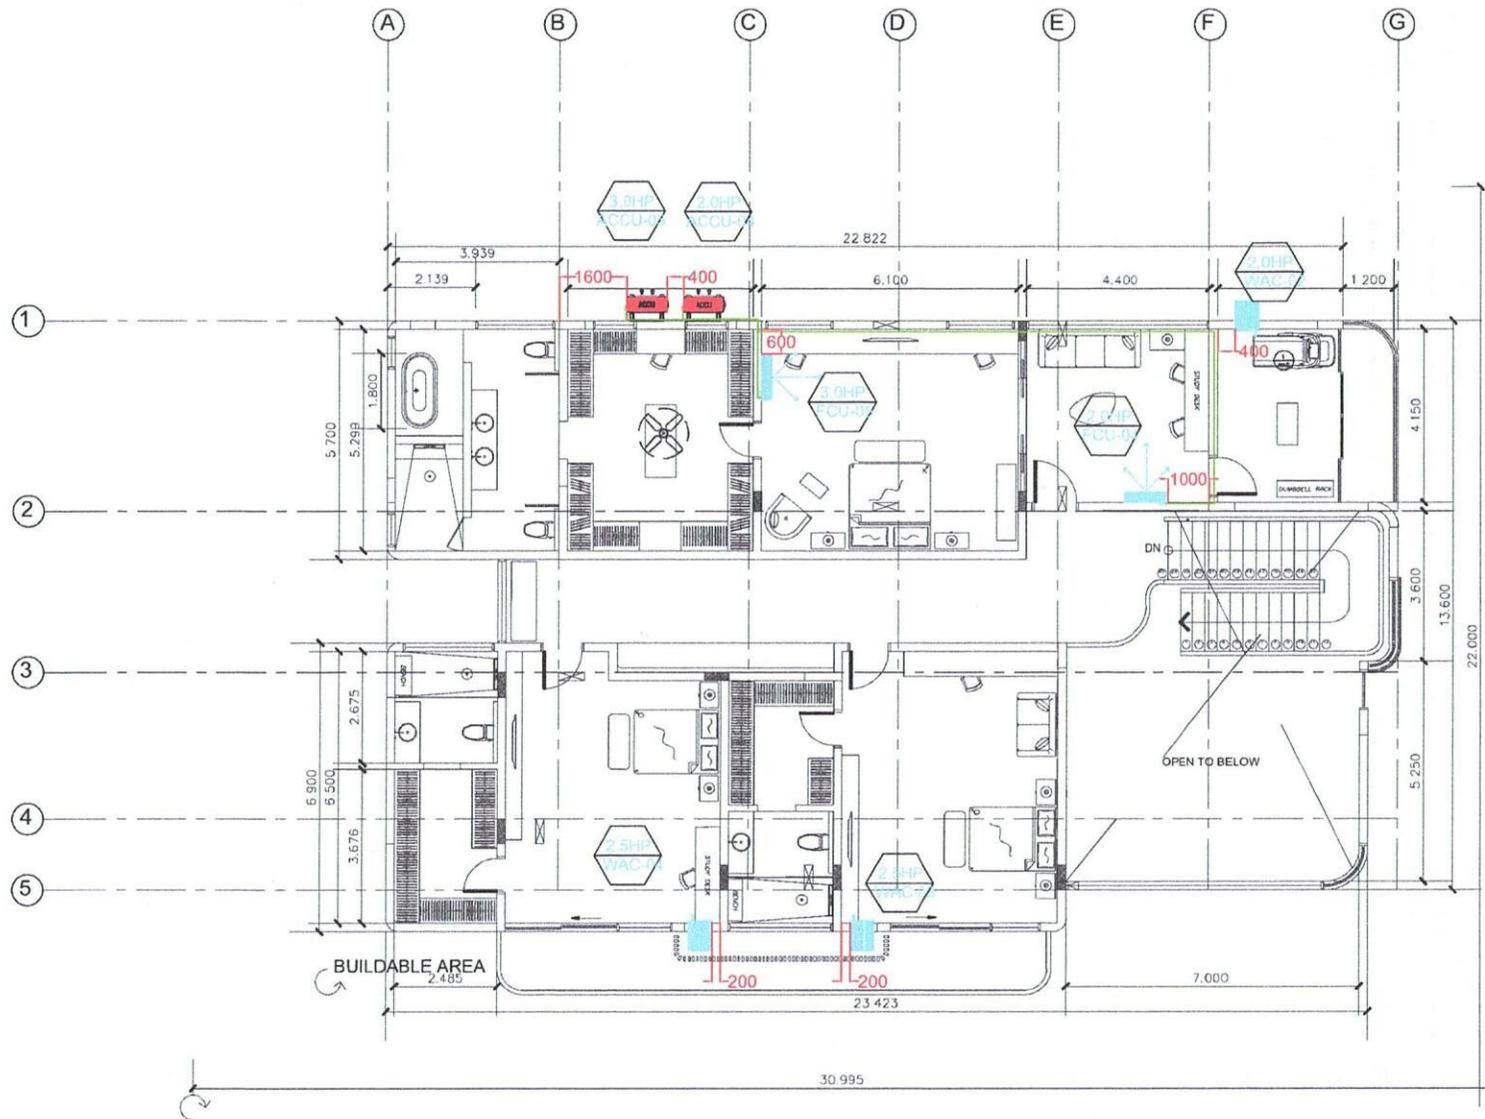
Customer Conforme:

Signature over Printed Name

Approved by:

 Mr. Alvin de Rivera
 Service Manager
 Service Department



| | | | | |
|--|---|--------------------------|----------------------------------|------------------|
|  | PROJECT TITLE: | PROJECT OWNER: | SHEET CONTENTS | SHEET NO. |
| | AIRCONDITIONING SYSTEM- RESIDENTIAL INSTALLATION | MR. MARC CHING CHUAHIOCK | AC SYSTEM LAYOUT OF GF | A |
| | PROJECT LOCATION: LOT 8, BLOCK 2, FIREFLY STREET, VALLE VERDE 7, BARANGAY UGONG, PASIG CITY | | DRAWN BY : AN CHECKED BY : AN | 01 02 |



PROJECT TITLE:
AIRCONDITIONING SYSTEM- RESIDENTIAL INSTALLATION

PROJECT LOCATION:
LOT 8, BLOCK 2, FIREFLY STREET, VALLE VERDE 7, BARANGAY UGONG, PASIG CITY

PROJECT OWNER:
MR. MARC CHING CHUAHIOCK

SHEET CONTENTS
AC SYSTEM LAYOUT OF 2F

DRAWN BY : AN
CHECKED BY : AN

SHEET NO.
A
02
02

PROJ NO.