



March 18, 2026

MS. CANDICE CORRAL
UNIT 4602 & 4603, CONNOR CONDOMINIUM, GREENHILLS CLUB FILIPINO ST., GREENHILLS CENTER, SAN JUAN CITY
TEL#: 0917-6870523 / 0908-8109466

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

* OPTION 1 *

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KS-IW25-MCAI1201M32 KOLIN WALL MOUNTED CERTUS A/ SERIES AIRCONDITIONER 23,800 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	50,995.00	31,756.20	PHP	31,756.20
1	UNIT/S	MODEL: KS-IW20-MCAI1201M32 KOLIN WALL MOUNTED CERTUS A/ SERIES AIRCONDITIONER 19,000 Kj/h (2.0HP) FULL DC INVERTER W/ WIFI R-32	42,995.00	26,176.20	PHP	26,176.20
1	UNIT/S	MODEL: KS-IW15-MCAI1201M32 KOLIN WALL MOUNTED CERTUS A/ SERIES AIRCONDITIONER 12,880 Kj/h (1.5HP) FULL DC INVERTER W/ WIFI R-32	33,995.00	19,336.20	PHP	19,336.20
1	UNIT/S	MODEL: KS-IW10-MCAI1201M32 KOLIN WALL MOUNTED CERTUS A/ SERIES AIRCONDITIONER 9,800 Kj/h (1.0HP) FULL DC INVERTER W/ WIFI R-32	30,995.00	17,056.20	PHP	17,056.20
TOTAL UNIT COST					PHP	94,324.80
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	122,580.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	217,504.80

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

BANK DETAILS:

* Unit/s & Delivery: Account Name - KOLIN MARKETING INC. / Account# - 011808002307 (BDO-KALAYAAN)

* Installation: Will be provided by assigned installer.

** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted By:

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

KMI-QUOTE-03-26-0147
MMC-24%/7K/6.5K

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines



March 17, 2026

Candice Corral

Unit 4602 and 4603 Connor Condominium Greenhills Club Filipino St. Greenhills Center San Juan City

0917-6870523, 0908-8109466

MODEL	Qty
KS-IW25-MCAI1201M32	1
KS-IW20-MCAI1201M32	1
KS-IW15-MCAI1201M32	1
KS-IW10-MCAI1201M32	1

MASTER BEDROOM Area 16 sqm

ACU 1	1.5 HP Wall Mounted Inverter	KS-IW15-MCAI1201M32			
	Estimated Pipe Length = 53 ft				
	Estimated Royal Cord Length = 58 ft				P 7,500.00
	Initial Charge				
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Floor)				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Copper Tube	Ø 1/4" x Ø 3/8"	43 ft	P 350.00/ft	P 15,050.00
	Royal Cord (comm. wire)	2.mm2 x 4C	48 ft	P 100.00/ft	P 4,800.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	P 60.00/ft	P 420.00
	Rubber Insulation	2 1/8" x 3/4" x 6'	10 pc/s	P 650.00/pc	P 6,500.00
	Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
					P 26,945.00
	Estimated Charges				P 34,445.00

BEDROOM2 Area 12 sqm

ACU 2	1.0 HP Wall Mounted Inverter	KS-IW10-MCAI1201M32			
	Estimated Pipe Length = 46 ft				
	Estimated Royal Cord Length = 51 ft				P 7,500.00
	Initial Charge				
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Floor)				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Copper Tube	Ø 1/4" x Ø 3/8"	36 ft	P 350.00/ft	P 12,600.00
	Royal Cord (comm. wire)	2.mm2 x 4C	41 ft	P 100.00/ft	P 4,100.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	P 60.00/ft	P 420.00
	Rubber Insulation	2 1/8" x 3/4" x 6'	7 pc/s	P 650.00/pc	P 4,550.00
	Drain pump		1 pc/s	P 2,900.00/pc	P 2,900.00
	Drain pump hose		5 ft	P 10.00/ft	P 50.00
	Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
					P 24,795.00
	Estimated Charges				P 32,295.00

LIVING, DINING, KITCHEN	Area	30 sqm
--------------------------------	------	--------

ACU 3 **2.5 HP Wall Mounted Inverter** **KS-IW25-MCAI1201M32**
 Estimated Pipe Length = 33 ft
 Estimated Royal Cord Length = 38 ft
Initial Charge P 8,500.00

- Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Outdoor Bracket (Floor)
 Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	1/4" x 1/2"	23 ft	P 350.00/ft	P 8,050.00
Royal Cord (comm. wire)	2.mm2 x 4C	28 ft	P 100.00/ft	P 2,800.00
Royal Cord (ACCU-Breaker)	3.5mm x 3C	7 ft	P 60.00/ft	P 420.00
Rubber Insulation	2 1/8" x 3/4" x 6'	3 pc/s	P 650.00/pc	P 1,950.00
Drain pump		1 pc/s	P 2,900.00/pc	P 2,900.00
Drain pump hose		5 ft	P 10.00/ft	P 50.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 16,345.00

Estimated Charges	P 24,845.00
--------------------------	--------------------

UNIT 4603	Area	20 sqm
------------------	------	--------

ACU 4 **2.0 HP Wall Mounted Inverter** **KS-IW20-MCAI1201M32**
 Estimated Pipe Length = 46 ft
 Estimated Royal Cord Length = 51 ft
Initial Charge P 7,500.00

- Includes:
 Labor
 10ft Copper Tube
 10ft Royal Cord
 Outdoor Bracket (Floor)
 Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	1/4" x 1/2"	36 ft	P 350.00/ft	P 12,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	41 ft	P 100.00/ft	P 4,100.00
Royal Cord (ACCU-Breaker)	3.5mm x 3C	7 ft	P 60.00/ft	P 420.00
Rubber Insulation	2 1/8" x 3/4" x 6'	5 pc/s	P 650.00/pc	P 3,250.00
Drain pump		1 pc/s	P 2,900.00/pc	P 2,900.00
Drain pump hose		5 ft	P 10.00/ft	P 50.00
Drain Hose	White -1/2"	7 ft	P 25.00/ft	P 175.00
				P 23,495.00

Estimated Charges	P 30,995.00
--------------------------	--------------------

Total Estimated Charges	P 122,580.00
--------------------------------	---------------------

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 This quotation is not yet final , for clarification modify, and for approval of bldg admin.
- 4 **Units need a drainpump due to a high level of drainage line, except MASTER BEDROOM of 4602.**
- 5 **Need for marking and site visit before installation with installer.**
- 7 Working days: Monday to Saturday, 8am- 5pm with parking. Need working permit.
- 8 Mechanical Plans, Permits, Electrical permits not included.
- 9 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 10 Air conditioning drain line and Electrical power supply (feeder line) **230v/ 60hz/ 1ph** , should be provided by customer's contractor. **Each unit separate power supply.**
- 11 **Final charges will be based on actual installation.**


Prepared by:

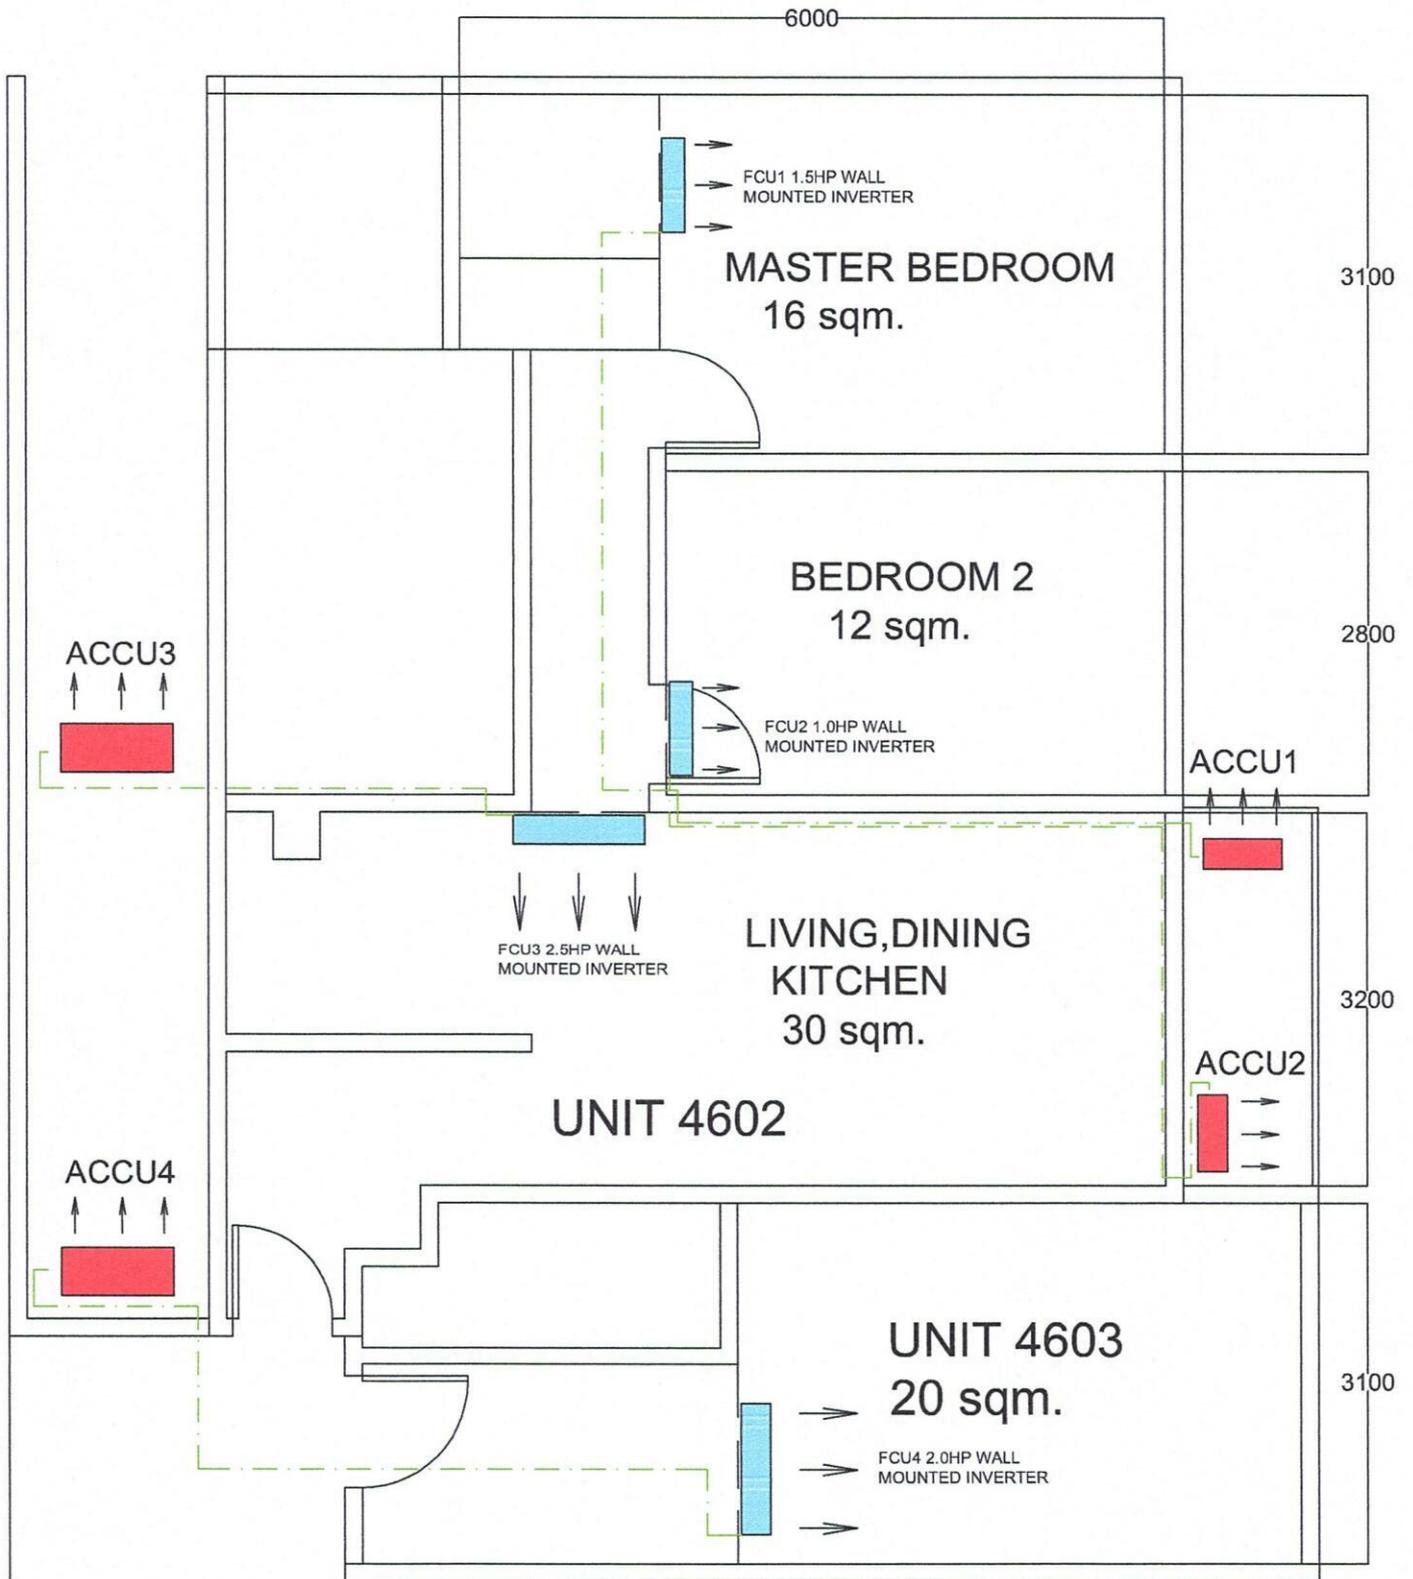

Jeffrey Dadios
Field Surveyor

Customer Conformee:

Signature Over Printed Name

Reviewed by:


03/17/2026
Engr. Adnan E. Nogoy
Project Engineer



PROJECT TITLE:	PROJECT OWNER:	SHEET CONTENTS	SHEET NO.
AIR CONDITIONING SYSTEM – RESIDENTIAL INSTALLATION	CANDICE CORRAL	AIR CONDITIONING SYSTEM LAYOUT	A
PROJECT LOCATION: Unit 4602 and 4603 Connor Condominium Greenhills Club		DRAWN BY : JD	0
			0