

MS. ODETTE PUMAREN
 UNIT 2809-E ONE ROCKWELL EAST, ROCKWELL DRIVE, MAKATI CITY
 TEL#: 0917-5332568

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

*** OPTION 1 ***

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KS-IW25-MCA11201M32 KOLIN WALL MOUNTED CERTUS A/ SERIES AIRCONDITIONER 23,800 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	50,995.00	31,756.20	PHP	31,756.20
1	UNIT/S	MODEL: KS-IW15-MCA11201M32 KOLIN WALL MOUNTED CERTUS A/ SERIES AIRCONDITIONER 12,880 Kj/h (1.5HP) FULL DC INVERTER W/ WIFI R-32	33,995.00	19,336.20	PHP	19,336.20
1	UNIT/S	MODEL: KS-IW10-MCA11201M32 KOLIN WALL MOUNTED CERTUS A/ SERIES AIRCONDITIONER 9,800 Kj/h (1.0HP) FULL DC INVERTER W/ WIFI R-32	30,995.00	17,056.20	PHP	17,056.20
TOTAL UNIT COST					PHP	68,148.60
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	71,385.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	140,133.60

*** OPTION 2 ***

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSG-IWF-25WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	70,495.00	46,576.20	PHP	46,576.20
1	UNIT/S	MODEL: KSG-IWF-15WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 12,960 Kj/h (1.5HP) FULL DC INVERTER W/ WIFI R-32	47,595.00	29,172.20	PHP	29,172.20
1	UNIT/S	MODEL: KSG-IWF-10WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 11,484 Kj/h (1.0HP) FULL DC INVERTER W/ WIFI R-32	43,595.00	26,132.20	PHP	26,132.20
TOTAL UNIT COST					PHP	101,880.60
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	71,385.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	173,865.60

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

BANK DETAILS:

- ** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.
- * Unit/s & Delivery: Account Name - KOLIN MARKETING INC. / Account# - 011808002307 (BDO-KALAYAAN)
- * Installation: Will be provided by assigned installer.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

- PRICES IS VAT INCLUSIVE.
- ** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (Final charges will be based on actual works).

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
 KMI-ASSISTANT

Noted By:
 MART NATHANIEL R. FLORES
 KMI-SUPERVISOR

Approved By:
 MS. EDITHA M. FLORES
 AVP - FINANCE

Conforme: _____
 SIGNATURE OVER PRINTED NAME

KMI-QUOTE-03-26-0124
 DCG-24%/6.5K/7K



March 09, 2026
 Odette Pumaren
 Unit 2809-E One Rockwell East, Rockwell Drive, Makati City
 0917-5332568

MODEL	Qty
KS-IW25-MCAI1201M32	1
KS-IW15-MCAI1201M32	1
KS-IW10-MCAI1201M32	1

OPTION 1

LIVING, DINING, KITCHEN Area 27 sqm

ACU 1	2.5 HP Wall Mounted Inverter	KS-IW25-MCAI1201M32			
	Estimated Pipe Length = 27 ft				
	Estimated Royal Cord Length = 34 ft				
	Initial Charge				₱ 8,500.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Wall)				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Copper Tube	1/4" x 1/2"	17 ft	₱ 350.00/ft	₱ 5,950.00
	Royal Cord (comm. wire)	2.mm2 x 4C	24 ft	₱ 100.00/ft	₱ 2,400.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3C	7 ft	₱ 60.00/ft	₱ 420.00
	Circuit Breaker waterproof	30Amp /1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	Rubber Insulation	2 1/8" x 3/4" x 6'	2 pc/s	₱ 650.00/pc	₱ 1,300.00
	Dismantle	2.5HP Wall Mounted	1 set	₱ 2,500.00/set	₱ 2,500.00
	Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
					<u>₱ 13,745.00</u>
	Estimated Charges				<u>₱ 22,245.00</u>

MASTER BEDROOM Area 12.5 sqm

ACU 2	1.5 HP Wall Mounted Inverter	KS-IW15-MCAI1201M32			
	Estimated Pipe Length = 46 ft				
	Estimated Royal Cord Length = 53 ft				
	Initial Charge				₱ 7,500.00
	Includes:				
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket (Wall)				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Copper Tube	Ø 1/4" x Ø 3/8"	36 ft	₱ 350.00/ft	₱ 12,600.00
	Royal Cord (comm. wire)	2.mm2 x 4C	43 ft	₱ 100.00/ft	₱ 4,300.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00
	Circuit Breaker waterproof	20amp/1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	Rubber Insulation	2 1/8" x 3/4" x 6'	6 pc/s	₱ 650.00/pc	₱ 3,900.00
	Dismantle	1.5HP Wall Mounted	1 set	₱ 2,500.00/set	₱ 2,500.00
	Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
					<u>₱ 24,895.00</u>
	Estimated Charges				<u>₱ 32,395.00</u>

BEDROOM2	Area 11 sqm
-----------------	-------------

ACU 3	1.0 HP Wall Mounted Inverter	KS-IW10-MCAI1201M32		
	Estimated Pipe Length = 17 ft			
	Estimated Royal Cord Length = 24 ft			
	Initial Charge			P 7,500.00
	Includes:			
	Labor			
	10ft Copper Tube			
	10ft Royal Cord			
	Outdoor Bracket (Wall)			
	Consumables			
	Installation Materials	Description	Qty	Price per qty
	Copper Tube	Ø 1/4" x Ø 3/8"	7 ft	P 350.00/ft
	Royal Cord (comm. wire)	2.mm2 x 4C	14 ft	P 100.00/ft
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	P 60.00/ft
	Circuit Breaker waterproof	20amp/1Ph	1 pc/s	P 1,000.00/pc
	Rubber Insulation	2 1/8" x 3/4" x 6'	2 pc/s	P 650.00/pc
	Dismantle	1.5HP Wall Mounted	1 set	P 2,500.00/set
	Drain Hose	White -1/2"	7 ft	P 25.00/ft
				P 9,245.00

Estimated Charges	P 16,745.00
--------------------------	-------------


Total Estimated Charges	P 71,385.00
--------------------------------	-------------

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 This quotation is not yet final , for clarification modify, and for approval of bldg admin.
- 4 Customer contractor need to open the ceiling or false beam in the area.
- 5 Need for marking and site visit before installation with installer, admin and owner for the location of outdoor.**
- 6 Customer Need to provide a ducting or exhaust fan for the outdoor area due to limited location for the fresh air intake.
- 7 Working days: Monday to Saturday, 8am- 5pm with parking.Need working permit.
- 8 Mechanical Plans, Permits, Electrical permits not included.
- 9 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 10 Air conditioning drain line and Electrical power supply (feeder line) **230v/ 60hz/ 1ph** , should be provided by customer's contractor.**Each unit separate power supply.**
- 11 **Final charges will be based on actual installation.**


Prepared by:




Jeffrey Dadios
 Field Surveyor

Customer Conformer:

 Signature Over Printed Name

Reviewed by:


 03/09/2026
Engr. Adrian E. Nogoy
 Project Engineer

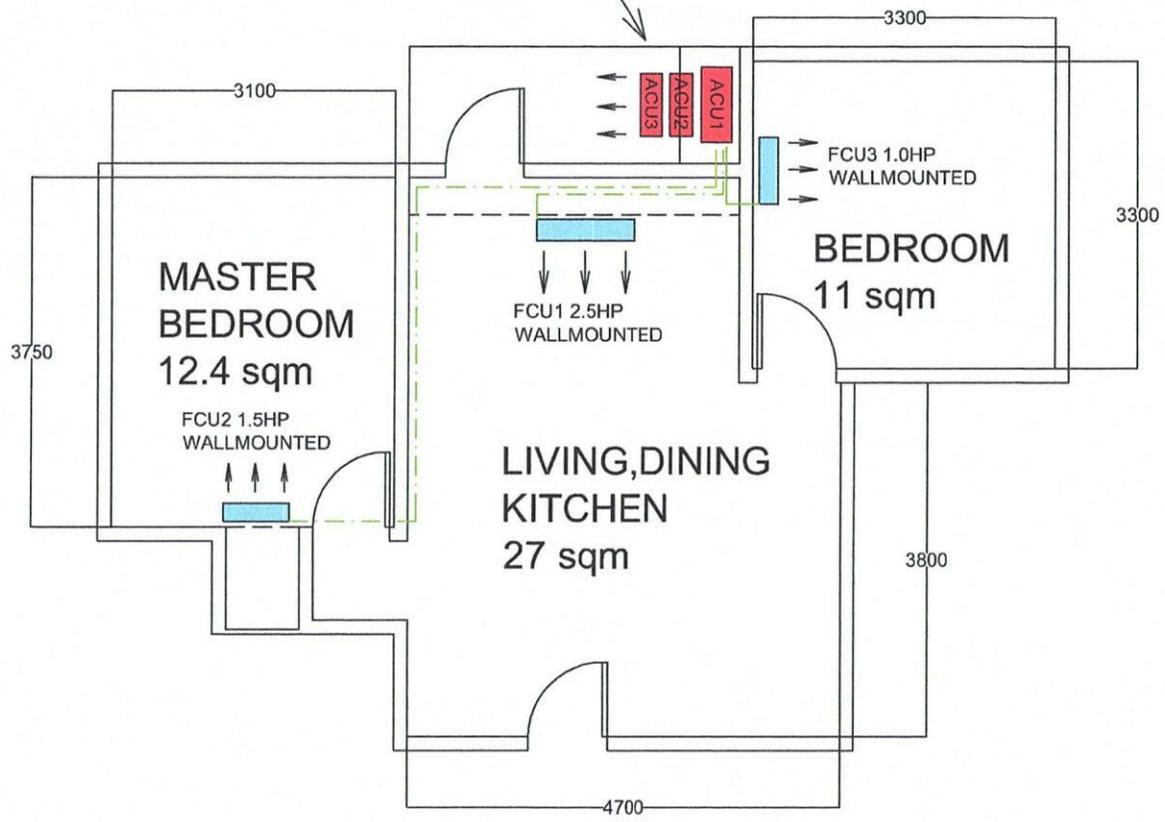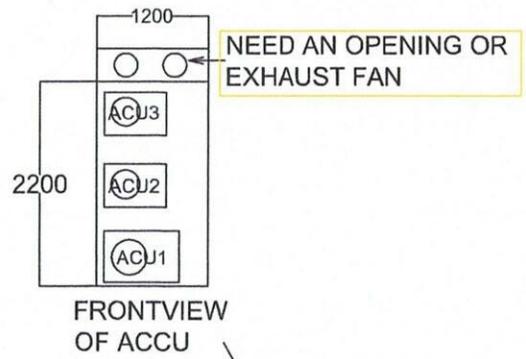

PROJECT TITLE:
AIR CONDITIONING SYSTEM – RESIDENTIAL INSTALLATION
(OPTION 1- WALL MOUNTED)
PROJECT LOCATION:
Unit 2809-E One Rockwell East, Rockwell Drive, Makati City

PROJECT OWNER:
ODETTE PUMAREN

SHEET CONTENTS
AC SYSTEM LAYOUT
DRAWN BY : JD
CHECKED BY : AN

SHEET NO.
A
01
01
PROJ NO.