



March 18, 2026

PHESCO INC.
3 1ST, BRGY. SAN BARTOLOME, NOVALICHES QUEZON CITY
TEL#: 0915-8339338

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

* OPTION 1 *

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KL-IF60-G6H1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 58,140 Kj/h (5.0TR) FULL DC INVERTER R32 SINGLE PHASE	168,995.00	114,436.20	PHP	114,436.20
2	UNIT/S	MODEL: KS-IW25-MCA11201M32 KOLIN WALL MOUNTED CERTUS A/ SERIES AIRCONDITIONER 23,800 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	50,995.00	31,756.20	PHP	63,512.40
TOTAL UNIT COST					PHP	177,948.60
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	77,255.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	255,803.60

* OPTION 2 *

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KL-IF60-G6H1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 58,140 Kj/h (5.0TR) FULL DC INVERTER R32 SINGLE PHASE	168,995.00	114,436.20	PHP	114,436.20
2	UNIT/S	MODEL: KSG-IWF-25WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	70,495.00	46,576.20	PHP	93,152.40
TOTAL UNIT COST					PHP	207,588.60
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	77,255.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	285,443.60

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

BANK DETAILS:

* Unit/s & Delivery: Account Name - KOLIN MARKETING INC. / Account# - 011808002307 (BDO-KALAYAAN)

* Installation: Will be provided by assigned installer.

** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.

WARRANTY:

FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted By:
MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:
MS. EDITHA M. FLORES
AVP - FINANCE

Conforme: _____
SIGNATURE OVER PRINTED NAME

KMI-QUOTE-03-26-0146
MMC-24%/14K/7K



March 17, 2026
 PHESCO INC
 3 1st, Brgy San Bartolome, Novaliches Quezon City
 0915-8339338

MODEL	Qty
KL-IF60-G6H1M32	1
KS-IW25-MCAI1201M32	2

LIVING AREA	Area	90 sqm
--------------------	------	--------

ACU 1	6.0 HP Floor Mounted Inverter	<i>KL-IF60-G6H1M32</i>	
	Estimated Pipe Length = 27 ft		
	Estimated Royal Cord Length = 34 ft		
	Initial Charge		₱ 14,000.00
	Includes:		
	Labor		
	10ft Copper Tube		
	10ft Royal Cord		
	Indoor Bracket (Floor)		
	Consumables		
	Installation Materials	Description	Qty Price per qty Subtotal
	Copper Tube	3/8" x 5/8"	17 ft ₱ 400.00/ft ₱ 6,800.00
	Royal Cord (comm. wire)	2.mm2 x 4C	24 ft ₱ 100.00/ft ₱ 2,400.00
	Royal Cord (ACCU-Breaker)	5.5mm x 3C	7 ft ₱ 70.00/ft ₱ 490.00
	Circuit Breaker waterproof	60Amp /1Ph	1 pc/s ₱ 1,000.00/pc ₱ 1,000.00
	Outdoor Bracket(fabricated)	wall	1 pc/s ₱ 5,000.00/pc ₱ 5,000.00
	Drain Hose	White -1/2"	7 ft ₱ 25.00/ft ₱ 175.00
			<u>₱ 15,865.00</u>

Estimated Charges	₱ 29,865.00
--------------------------	-------------

DINING ROOM	Area	22 sqm
--------------------	------	--------

ACU 2	2.5 HP Wall Mounted Inverter	<i>KS-IW25-MCAI1201M32</i>	
	Estimated Pipe Length = 17 ft		
	Estimated Royal Cord Length = 24 ft		
	Initial Charge		₱ 8,500.00
	Includes:		
	Labor		
	10ft Copper Tube		
	10ft Royal Cord		
	Outdoor Bracket (Wall)		
	Consumables		
	Installation Materials	Description	Qty Price per qty Subtotal
	Copper Tube	1/4" x 1/2"	7 ft ₱ 350.00/ft ₱ 2,450.00
	Royal Cord (comm. wire)	2.0mm2 x 4C	14 ft ₱ 100.00/ft ₱ 1,400.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3C	7 ft ₱ 60.00/ft ₱ 420.00
	Circuit Breaker waterproof	30Amp /1Ph	1 pc/s ₱ 1,000.00/pc ₱ 1,000.00
	PVC (drainline)	blue- 3/4"	2 pc/s ₱ 150.00/pc ₱ 300.00
	Drain Hose	White -1/2"	7 ft ₱ 25.00/ft ₱ 175.00
			<u>₱ 5,745.00</u>

Estimated Charges	₱ 14,245.00
--------------------------	-------------

MASTER BEDROOM Area 28 sqm

ACU 3 **2.5 HP Wall Mounted Inverter** **KS-IW25-MCAI1201M32**
Estimated Pipe Length = 46 ft
Estimated Royal Cord Length = 53 ft
Initial Charge ₱ 8,500.00

Includes:
Labor
10ft Copper Tube
10ft Royal Cord
Outdoor Bracket (Wall)
Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	1/4" x 1/2"	36 ft	₱ 350.00/ft	₱ 12,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	43 ft	₱ 100.00/ft	₱ 4,300.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00
Circuit Breaker waterproof	30amp/1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	6 pc/s	₱ 650.00/pc	₱ 3,900.00
Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
Pipe Hanger	fabricated	6 pc/s	₱ 300.00/pc	₱ 1,800.00
PVC (drainline)	blue- 3/4"	1 pc/s	₱ 150.00/pc	₱ 150.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 24,645.00


Estimated Charges ₱ 33,145.00

Total Estimated Charges ₱ 77,255.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.


Installation notes:

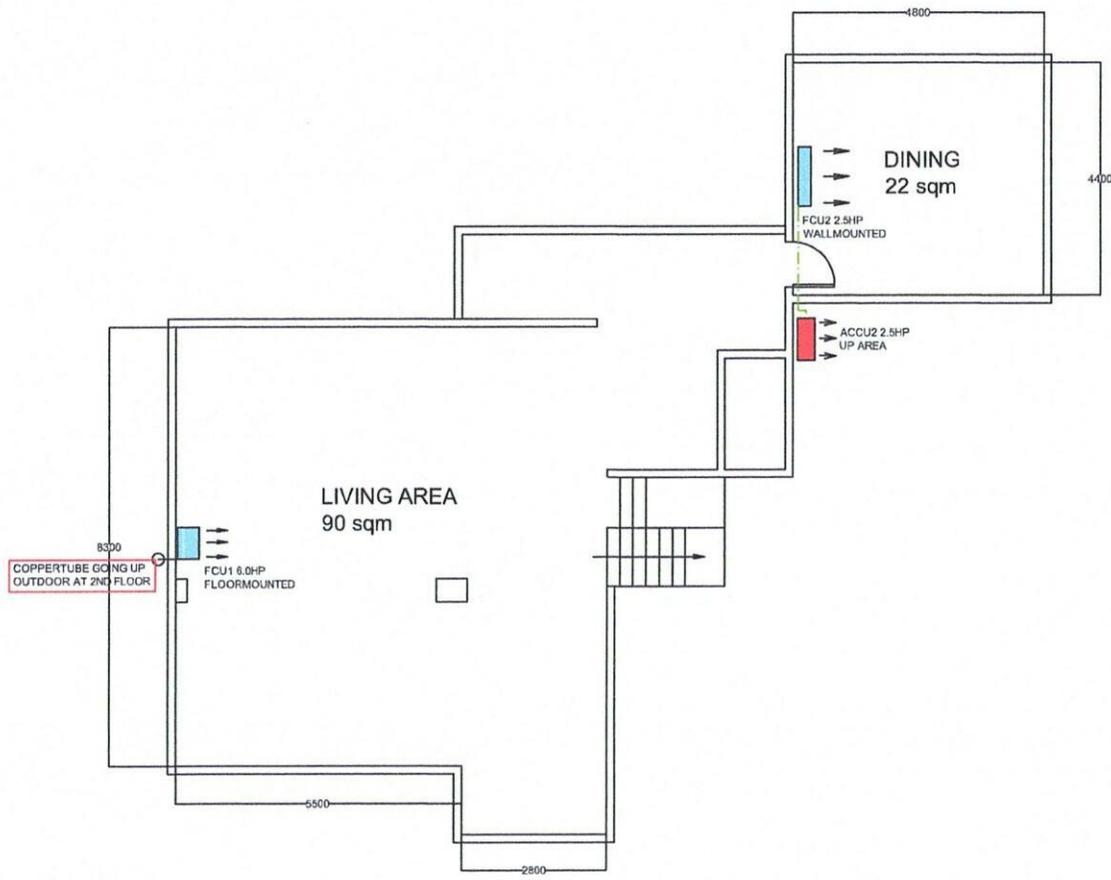
- 1 Location of indoor and outdoor units are not yet final.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 This quotation is not yet final , for clarification modify, and for approval of owner.
- 4 Need for marking and site visit before installation with installer, and owner for the location of outdoor.**
- 5 Working days: Monday to Saturday, 8am- 5pm with parking.
- 6 Mechanical Plans, Permits, Electrical permits not included.
- 7 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 8 Air conditioning drain line and Electrical power supply (feeder line) **230v/ 60hz/ 1ph** , should be provided by customer's contractor. **Each unit separate power supply.**
- 9 **Final charges will be based on actual installation.**

Prepared by:

Jeffrey Dadios
Field Surveyor

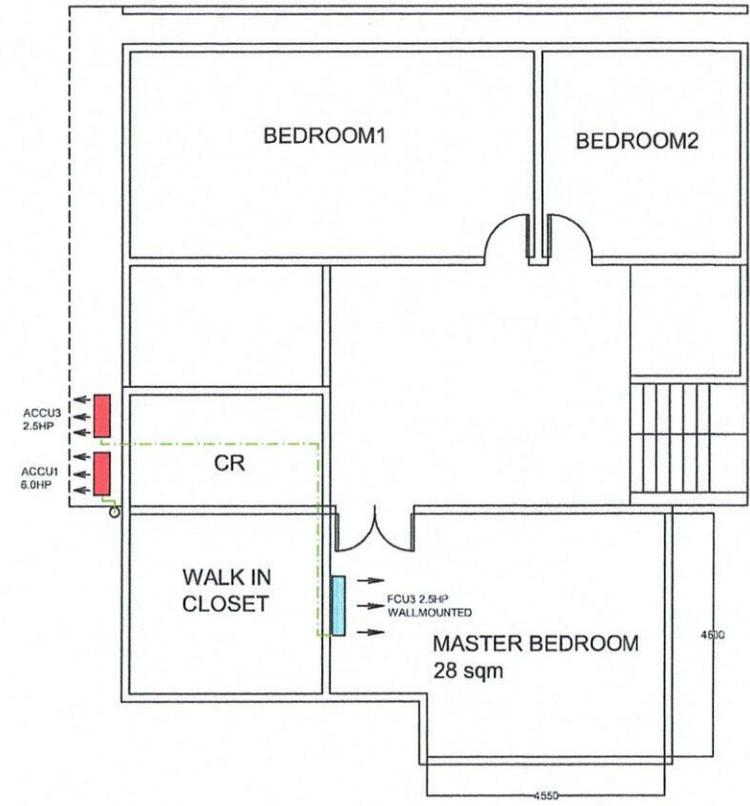
Customer Conformer:

Signature Over Printed Name

Reviewed by:

03/18/2026
Engr. Adrian E. Nogoy
Project Engineer



GROUND FLOOR



SECOND FLOOR



PROJECT TITLE:
AIR CONDITIONING SYSTEM – RESIDENTIAL INSTALLATION

PROJECT LOCATION:
3 1st, Brgy San Bartolome, Novaliches Quezon City

PROJECT OWNER:
PHESCO INC

SHEET CONTENTS
AC SYSTEM LAYOUT

DRAWN BY : JD
CHECKED BY : AN

SHEET NO.
A
01
01

PROJ NO.