



May 15, 2025

MANILA BAPTIST CHURCH
1301 LEAON GUINTO ST. ERMITA, MANILA
TEL#: 0939-9166229 / 0939-2398975

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
2	UNIT/S	MODEL: KSG-IWF-25Wfy-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	45,436.20 7	PHP	90,872.40
1	UNIT/S	MODEL: KSG-IWF-15Wfy-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 12,960 Kj/h (1.5HP) FULL DC INVERTER W/ WIFI R-32	46,595.00	28,412.20 7	PHP	28,412.20
TOTAL UNIT COST					PHP	119,284.60
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	101,740.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	221,624.60

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:


MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-05-25-0384
ECY-24%/7K

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.
1854 Sta. Rita St., Guadalupe Nuevo, Makati City
Tel.: (632) 8852-6473
Fax: (632) 8852-2170 / (632) 8852-4792
www.kolinphil.com.ph / kolinphilippines

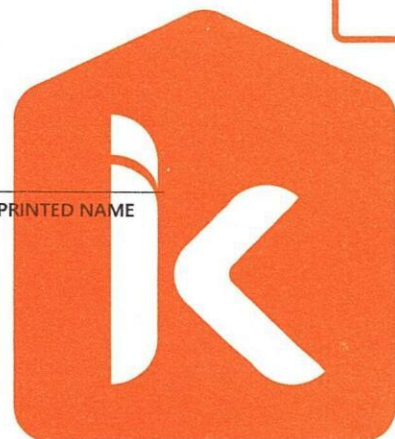

May 15, 2025
MANILA BAPTIST CHURCH
 1301 Leon Guinto St. Ermita Manila
[0939-9166229](tel:0939-9166229)/[0939-2398975](tel:0939-2398975)

MODEL	Qty
KSG-IWF-25WFY8K1M32	2
KSG-IWF-15WFY8K1M32	1

ICT ROOM	Area	16.2 sqm
----------	------	----------

ACU 1	2.5 HP Wall Mounted Inverter	KSG-IWF-25WFY8K1M32				
	Estimated Pipe Length =	66 ft				
	Estimated Royal Cord Length =	73 ft				
	Initial Charge					₱ 7,700.00
	Includes:					
	Labor					Less Outdoor
	10ft Copper Tube					Bracket
	10ft Royal Cord					
	Consumables					
	Installation Materials	Description	Qty	Price per qty	Subtotal	
	Copper Tube	Ø 1/4" x Ø 5/8"	56 ft	₱ 400.00/ft	₱ 22,400.00	
	Royal Cord (comm. wire)	2.mm2 x 4C	63 ft	₱ 100.00/ft	₱ 6,300.00	
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00	
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00	
	Outdoor bracket	Fabricated floor	1 pc/s	₱ 2,500.00/pc	₱ 2,500.00	
	PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00	₱ 32,920.00
Estimated Charges						₱ 40,620.00

ACU 2	2.5 HP Wall Mounted Inverter	KSG-IWF-25WFY8K1M32				
	Estimated Pipe Length =	52 ft				
	Estimated Royal Cord Length =	59 ft				
	Initial Charge					₱ 7,700.00
	Includes:					
	Labor					Less Outdoor
	10ft Copper Tube					Bracket
	10ft Royal Cord					
	Consumables					
	Installation Materials	Description	Qty	Price per qty	Subtotal	
	Copper Tube	Ø 1/4" x Ø 5/8"	42 ft	₱ 400.00/ft	₱ 16,800.00	
	Royal Cord (comm. wire)	2.mm2 x 4C	49 ft	₱ 100.00/ft	₱ 4,900.00	
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00	
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00	
	Dismantle	1.5HP Wall Mounted	1 set	₱ 2,500.00/set	₱ 2,500.00	
	PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00	₱ 25,920.00
Estimated Charges						₱ 33,620.00

STORAGE ROOM				Area	16 sqm
ACU 3	1.5 HP Wall Mounted Inverter	KSG-IWF-15WFF8K1M32			
	Estimated Pipe Length =	46 ft			
	Estimated Royal Cord Length =	51 ft			
	Initial Charge				₱ 6,700.00
	Includes:				
	Labor				Less Outdoor Bracket
	10ft Copper Tube				
	10ft Royal Cord				
	Consumables				
Installation Materials	Description	Qty	Price per qty	Subtotal	
Copper Tube	Ø 1/4" x Ø 3/8"	36 ft	₱ 350.00/ft	₱ 12,600.00	
Royal Cord (comm. wire)	2.mm2 x 4C	41 ft	₱ 100.00/ft	₱ 4,100.00	
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00	
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00	
Dismantle	1.0HP Wall Mounted	1 set	₱ 2,500.00/set	₱ 2,500.00	
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00	
					₱ 20,800.00

Estimated Charges	₱ 27,500.00
-------------------	-------------



Total Estimated Charges	₱ 101,740.00
-------------------------	--------------

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for site visit and markings of drainline and lay out of coppertube. With installer
- 4 Expose coppertube and drainline in the area. Onsite fabricated outdoor Bracket for ACU1.
- 5 Need to open the ceiling and roof for the coppertube and royal cord.
- 6 ICT ROOM , Need 2 units due to 24 hours operation, use alternate.
- 7 Working days: Monday to Saturday, 8am- 5pm with parking. Need working permit.
- 8 Mechanical Plans, Permits, Electrical permits not included.
- 9 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 10 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , should be provided by customer's contractor.
- 11 Final charges will be based on actual installation.

Prepared by:

Jeoffrey Dadios

Field Surveyor

Customer Conformer:

Signature Over Printed Name

Reviewed by:

Engr. Kenneth Zamora

Service Supervisor Shop and Field Operation