



May 20, 2025

SHV RESIDENCE

ATTN: MR. JOSEPH GUTIERREZ

LOT 1 BLK 30 RONDA DEL GRECO COR. MURILLO ST., SUSANA HEIGHTS SUBD. VILLAGE 1, BRGY. TUNASAN MUNTINLUPA CITY

TEL#: 0917-3174418

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KL-IF60-G6H1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 58,140 Kj/h (5.0TR) FULL DC INVERTER R32 SINGLE PHASE	165,995.00	112,156.20	PHP	112,156.20
1	UNIT/S	MODEL: KSG-IWF-30WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	51,212.20	PHP	51,212.20
2	UNIT/S	MODEL: KSG-IWF-25WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	45,436.20	PHP	90,872.40
1	UNIT/S	MODEL: KSG-IWF-20WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 19,000 Kj/h (2.0HP) FULL DC INVERTER W/ WIFI R-32	59,595.00	38,292.20	PHP	38,292.20
5	UNIT/S	MODEL: KSG-IWF-15WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 12,960 Kj/h (1.5HP) FULL DC INVERTER W/ WIFI R-32	46,595.00	28,412.20	PHP	142,061.00
TOTAL UNIT COST					PHP	434,594.00
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	209,630.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	644,824.00

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Stated installation costs & unit capacity is base on given floor plan only. Site is still subject for actual ocular/survey.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-05-25-0403
REG-24%/14K/7K
OMF

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines



MAY 16, 2025

MR JOSEPH GUTIERREZ

Lot1 Block 30 Ronda del Greco cor. Murillo st. Susana Heights Subd. Village 1, Brgy. Tunasan Muntinlupa City

MODEL	Qty
KL-IF60-G60H1M32	1
KSG-IWF-30Wfy8K1M32	1
KSG-IWF-25Wfy8K1M32	2
KSG-IWF-20Wfy8K1M32	1
KSG-IWF-15Wfy8K1M32	5

THEATER		Area	28 sqm
---------	--	------	--------

ACU 1 2.5 HP Wall Mounted Inverter *KSG-IWF-25Wfy8K1M32*

Estimated Pipe Length = 36 ft

Estimated Royal Cord Length = 41 ft

Initial Charge ₱ 8,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	26 ft	₱ 400.00/ft	₱ 10,400.00
Royal Cord (comm. wire)	2.mm2 x 4C	31 ft	₱ 100.00/ft	₱ 3,100.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	4 pc/s	₱ 350.00/pc	₱ 1,400.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 16,500.00

Estimated Charges	₱ 25,000.00
--------------------------	--------------------

GUESTROOM		Area	17 sqm
-----------	--	------	--------

ACU 2 1.5 HP Wall Mounted Inverter *KSG-IWF-15Wfy8K1M32*

Estimated Pipe Length = 17 ft

Estimated Royal Cord Length = 22 ft

Initial Charge ₱ 7,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 3/8"	7 ft	₱ 350.00/ft	₱ 2,450.00
Royal Cord (comm. wire)	2.mm2 x 4C	12 ft	₱ 100.00/ft	₱ 1,200.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	2 pc/s	₱ 350.00/pc	₱ 700.00
Full thread	3/8" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Metal Clamp	3"	4 pc/s	₱ 120.00/pc	₱ 480.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 6,580.00

Estimated Charges	₱ 14,080.00
--------------------------	--------------------

LIVING					Area	35 sqm
---------------	--	--	--	--	-------------	---------------

ACU 3	3.0 HP Wall Mounted Inverter	KSG-IWF-30Wfy8K1M32				
	Estimated Pipe Length =	46 ft				
	Estimated Royal Cord Length =	51 ft				
	Initial Charge					₱ 8,500.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (Wall)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	36 ft	₱ 400.00/ft	₱ 14,400.00
Royal Cord (comm. wire)	2.mm2 x 4C	41 ft	₱ 100.00/ft	₱ 4,100.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	6 pc/s	₱ 350.00/pc	₱ 2,100.00
Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
Metal Clamp	3"	8 pc/s	₱ 120.00/pc	₱ 960.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 23,460.00

Estimated Charges	₱ 31,960.00
--------------------------	--------------------

KITCHEN DINING					Area	49 sqm
-----------------------	--	--	--	--	-------------	---------------

ACU 4	6.0HP Floor Standing Inverter	KL-IF60-G60H1M32				
	Estimated Pipe Length =	20 ft				
	Estimated Royal Cord Length =	25 ft				
	Initial Charge					₱ 14,000.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Indoor Bracket (Floor)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	10 ft	₱ 400.00/ft	₱ 4,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	15 ft	₱ 100.00/ft	₱ 1,500.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	5 ft	₱ 70.00/ft	₱ 350.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	2 pc/s	₱ 350.00/pc	₱ 700.00
Full thread	3/8" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
Metal Clamp	3"	4 pc/s	₱ 120.00/pc	₱ 480.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 13,480.00

Estimated Charges	₱ 27,480.00
--------------------------	--------------------

SECOND FLOOR

BEDROOM 1	Area	18 sqm
------------------	------	--------

ACU 5 1.5 HP Wall Mounted Inverter **KSG-IWF-15Wfy8K1M32**
 Estimated Pipe Length = 17 ft
 Estimated Royal Cord Length = 22 ft
Initial Charge ₱ 7,500.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (wall)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 3/8"	7 ft	₱ 350.00/ft	₱ 2,450.00
Royal Cord (comm. wire)	2.mm2 x 4C	12 ft	₱ 100.00/ft	₱ 1,200.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	2 pc/s	₱ 350.00/pc	₱ 700.00
Full thread	3/8" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Metal Clamp	3"	4 pc/s	₱ 120.00/pc	₱ 480.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 6,700.00

Estimated Charges		₱ 14,200.00
--------------------------	--	-------------

BEDROOM 2	Area	19 sqm
------------------	------	--------

ACU 6 1.5 HP Wall Mounted Inverter **KSG-IWF-15Wfy8K1M32**
 Estimated Pipe Length = 27 ft
 Estimated Royal Cord Length = 32 ft
Initial Charge ₱ 7,500.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (wall)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 3/8"	17 ft	₱ 350.00/ft	₱ 5,950.00
Royal Cord (comm. wire)	2.mm2 x 4C	22 ft	₱ 100.00/ft	₱ 2,200.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	3 pc/s	₱ 350.00/pc	₱ 1,050.00
Full thread	3/8" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Metal Clamp	3"	5 pc/s	₱ 120.00/pc	₱ 600.00
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
				₱ 11,520.00

Estimated Charges		₱ 19,020.00
--------------------------	--	-------------

GYM						Area	28 sqm
------------	--	--	--	--	--	-------------	---------------

ACU 7 1.5 HP Wall Mounted Inverter *KSG-IWF-15Wfy8K1M32*
 Estimated Pipe Length = 30 ft
 Estimated Royal Cord Length = 35 ft
Initial Charge ₱ 7,500.00

Includes:

Labor
 10ft Copper Tube
 10ft Royal Cord
 Outdoor Bracket (Wall)
 Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 3/8"	20 ft	₱ 350.00/ft	₱ 7,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	25 ft	₱ 100.00/ft	₱ 2,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	4 pc/s	₱ 350.00/pc	₱ 1,400.00
Full thread	3/8" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Metal Clamp	3"	6 pc/s	₱ 120.00/pc	₱ 720.00
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
				₱ 13,220.00

Estimated Charges	₱ 20,720.00
--------------------------	--------------------

HOME OFFICE						Area	16 sqm
--------------------	--	--	--	--	--	-------------	---------------

ACU 8 1.5 HP Wall Mounted Inverter *KSG-IWF-15Wfy8K1M32*
 Estimated Pipe Length = 20 ft
 Estimated Royal Cord Length = 25 ft
Initial Charge ₱ 7,500.00

Includes:

Labor
 10ft Copper Tube
 10ft Royal Cord
 Outdoor Bracket (Wall)
 Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 3/8"	10 ft	₱ 350.00/ft	₱ 3,500.00
Royal Cord (comm. wire)	2.mm2 x 4C	15 ft	₱ 100.00/ft	₱ 1,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	2 pc/s	₱ 350.00/pc	₱ 700.00
Metal Clamp	3"	4 pc/s	₱ 120.00/pc	₱ 480.00
Full thread	3/8" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 7,930.00

Estimated Charges	₱ 15,430.00
--------------------------	--------------------

ACU 9	2.5 HP Wall Mounted Inverter	KSG-IWF-25WY8K1M32		
	Estimated Pipe Length =	36 ft		
	Estimated Royal Cord Length =	41 ft		
	Initial Charge			₱ 8,500.00
	Includes:			
	Labor			
	10ft Copper Tube			
	10ft Royal Cord			
	Outdoor Bracket (Wall)			
	Consumables			
	Installation Materials	Description	Qty Price per qty	Subtotal
	Copper Tube	Ø 1/4" x Ø 5/8"	26 ft ₱ 400.00/ft	₱ 10,400.00
	Royal Cord (comm. wire)	2.mm2 x 4C	31 ft ₱ 100.00/ft	₱ 3,100.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft ₱ 60.00/ft	₱ 300.00
	Circuit Breaker waterproof	30A / 1Ph	1 pc/s ₱ 1,000.00/pc	₱ 1,000.00
	Rubber Insulation	2 1/8" x 3/4" x 6'	5 pc/s ₱ 350.00/pc	₱ 1,750.00
	Full thread	3/8" x 10'	1 pc/s ₱ 150.00/pc	₱ 150.00
	Metal Clamp	3"	8 pc/s ₱ 120.00/pc	₱ 960.00
	PVC blue	3/4" x 10'	2 pc/s ₱ 150.00/pc	₱ 300.00
				<u>₱ 17,960.00</u>
	Estimated Charges			₱ 26,460.00

MASTER WIC	Area	21 sqm
------------	------	--------

ACU 10	2.0 HP Wall Mounted Inverter	KSG-IWF-20Wfy8K1M32		
	Estimated Pipe Length =	20	ft	
	Estimated Royal Cord Length =	25	ft	
	Initial Charge			₱ 7,500.00
	Includes:			
	Labor			
	10ft Copper Tube			
	10ft Royal Cord			
	Outdoor Bracket (Wall)			
	Consumables			
Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	10 ft	₱ 350.00/ft	₱ 3,500.00
Royal Cord (comm. wire)	2.mm2 x 4C	15 ft	₱ 100.00/ft	₱ 1,500.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	2 pc/s	₱ 350.00/pc	₱ 700.00
Full thread	3/8" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Metal Clamp	3"	4 pc/s	₱ 120.00/pc	₱ 480.00
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
				₱ 7,780.00
Estimated Charges				₱ 15,280.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Unit capacity, location of indoor and outdoor units base on floor plan.
- 2 Installation cost base on floor plan.
- 3 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 4 Need for site visit and markings of drainline and lay out of coppertube.
- 5 Working days: Monday to Saturday, 8am- 5pm with parking. Need working permit.
- 6 Mechanical Plans, Permits, Electrical permits not included.
- 7 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 8 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , should be provided by customer's contractor.
- 9 **Final charges will be based on actual installation.**

Prepared by:

Jeffrey Dadios

Field Surveyor


Customer Conformance:

Signature Over Printed Name


Reviewed by:

Engr. Kenneth Zamora

Service Supervisor Shop and Field
Operation

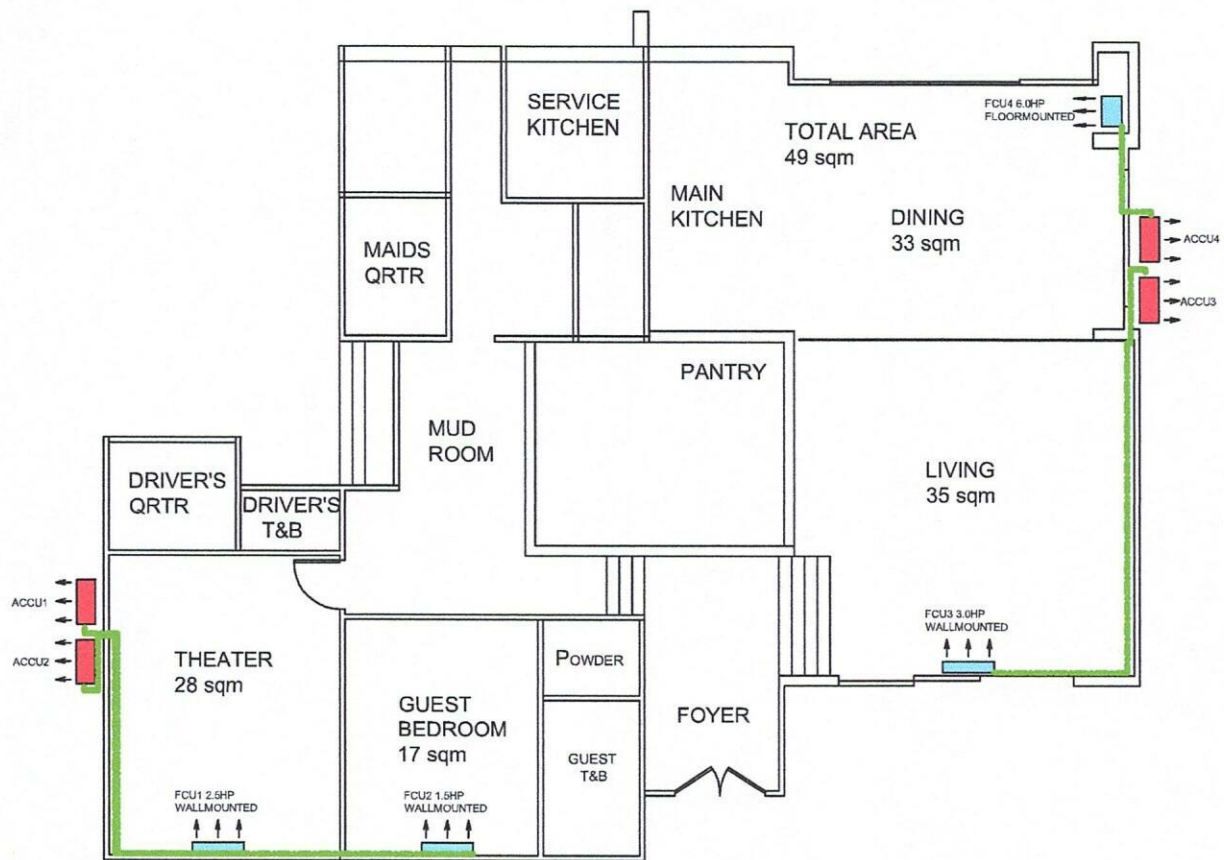

GROUND FLOOR

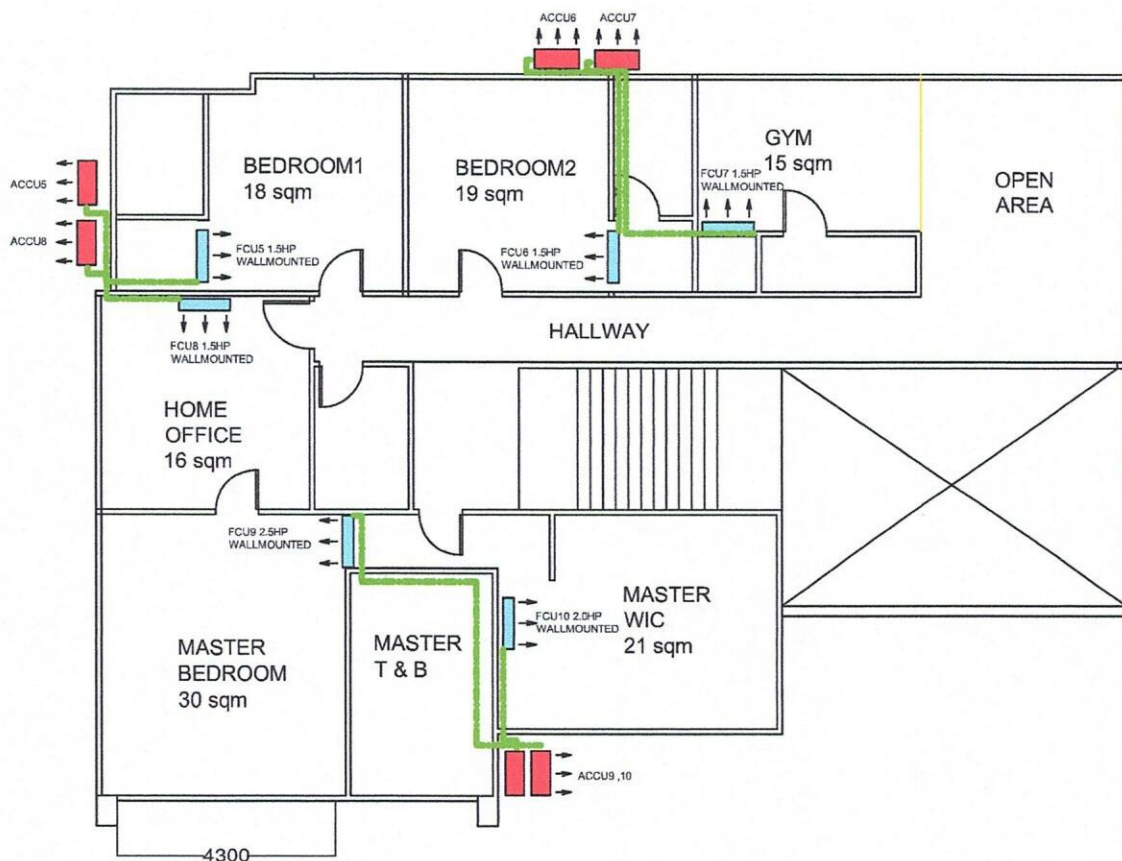

SECOND FLOOR