



May 21, 2025

LOPA COMPOUND DEVELOPMENT / HOUSE #7 NINE
LOPA FARM MARILAQUE HIWAY, SITIO MAYAGAY, BRGY. SAMPALOC TANAY RIZAL
Email: mereyes@foro.ph

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSG-IWF-30WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	51,212.20	PHP	51,212.20
1	UNIT/S	MODEL: KSG-IWF-20WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 19,000 Kj/h (2.0HP) FULL DC INVERTER W/ WIFI R-32	59,595.00	38,292.20	PHP	38,292.20
1	UNIT/S	MODEL: KA-200MCARINV32 KOLIN WINDOW TYPE CREO SERIES AIRCONDITIONER 19,800 Kj/h (2.0HP) FULL DC INVERTER R-32 WITH REMOTE (WxDxH) 26"x30.7"x16.8"	36,995.00	26,916.20	PHP	26,916.20
2	UNIT/S	MODEL: KA-150MCARINV32 KOLIN WINDOW TYPE CREO SERIES AIRCONDITIONER 12,800 Kj/h (1.5HP) FULL DC INVERTER R-32 WITH REMOTE (WxDxH) 17.7"x26.6"x13.8"	27,995.00	20,276.20	PHP	40,552.40
TOTAL UNIT COST					PHP	156,973.00
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	60,210.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	217,783.00

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

FOR WINDOW TYPE: ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB, TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual).**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

**** SUBJECT FOR ACTUAL SITE VISIT / OCULAR ****

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:
MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-04-25-0270-rev2
DCG-24%/7K/1.2K/1K

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines

MAY 16, 2025

LOPA COMPOUND DEVELOPMENT/ HOUSE #7 NINE

Lopa Farm Marilaque Hiway Sitio Mayagay, Brgy Sampaloc Tanay Rizal

MODEL	QUANTITY
KSG-IWF-30Wfy8K1M32	1
KSG-IWF-20Wfy8K1M32	1
KA-200MCArINV32	1
KA-150MCArINV32	2

GROUND FLOOR

FOYER/LIVING AREA	Area ≈ 28 sq.m
--------------------------	----------------

ACU 1	3.0hp Wall mounted Inverter	KSG-IWF-30Wfy8K1M32	
	Estimated Pipe Length :	50	ft
	Estimated Royal Cord Length :	55	ft
	Initial Charge		P 8,500.00
	Includes:		

	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket				
	Other Consumables				
Additional Charges	Description	Unit		Price Per Unit	Subtotal
Copper Tube	1/4"x 5/8"	40 ft	P	400.00 / ft	P 16,000.00
Royal Cord	2.mm2 x 4C	45 ft	P	100.00 / ft	P 4,500.00
Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P	60.00 / ft	P 300.00
Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	P	1,000.00 / pc	P 1,000.00
PVC(Drainline)	Blue 3/4"	2 pc(s)	P	150.00 / pc	P 300.00
Rubber Insulation	2 1/8"x3/4" x 6'	8 pc(s)	P	350.00 / pc	P 2,800.00
Full Thread	3 meters	2 pc(s)	P	150.00 / pc	P 300.00
Pipe hanger	3 inches	14 pc(s)	P	120.00 / pc	P 1,680.00
					P 26,880.00

Estimated Charges	P 35,380.00
--------------------------	--------------------

ACU 2	2.0hp Wall mounted Inverter	KSG-IWF-20Wfy8K1M32	
	Estimated Pipe Length :	27	ft
	Estimated Royal Cord Length :	32	ft
	Initial Charge		P 7,500.00
	Includes:		

	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Outdoor Bracket				
	Other Consumables				
Additional Charges	Description	Unit		Price Per Unit	Subtotal
Copper Tube	1/4"x 5/8"	17 ft	P	400.00 / ft	P 6,800.00
Royal Cord	2.mm2 x 4C	22 ft	P	100.00 / ft	P 2,200.00
Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P	60.00 / ft	P 300.00
Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	P	1,000.00 / pc	P 1,000.00
PVC(Drainline)	Blue 3/4"	2 pc(s)	P	150.00 / pc	P 300.00
Rubber Insulation	2 1/8"x3/4" x 6'	2 pc(s)	P	350.00 / pc	P 700.00
Full Thread	3 meters	1 pc(s)	P	150.00 / pc	P 150.00
Pipe hanger	3 inches	4 pc(s)	P	120.00 / pc	P 480.00
					P 11,930.00

Estimated Charges	P 19,430.00
--------------------------	--------------------

MASTER BEDROOM		Area ≈ 23.4 sq.m
-----------------------	--	------------------

ACU3 2.0hp Windowtype Inverter KA-200MCARINV32

Initial charge P 1,200.00
Angle Bracket P 600.00

Estimated charges P 1,800.00

BEDROOM 2		Area ≈ 14 sq.m
------------------	--	----------------

ACU4 1.5hp Windowtype Inverter KA-150MCARINV32

Initial charge P 1,200.00
Angle Bracket P 600.00


Estimated charges P 1,800.00

BEDROOM 1		Area ≈ 14 sq.m
------------------	--	----------------

ACU5 1.5hp Windowtype Inverter KA-150MCARINV32

Initial charge P 1,200.00
Angle Bracket P 600.00

Estimated charges P 1,800.00

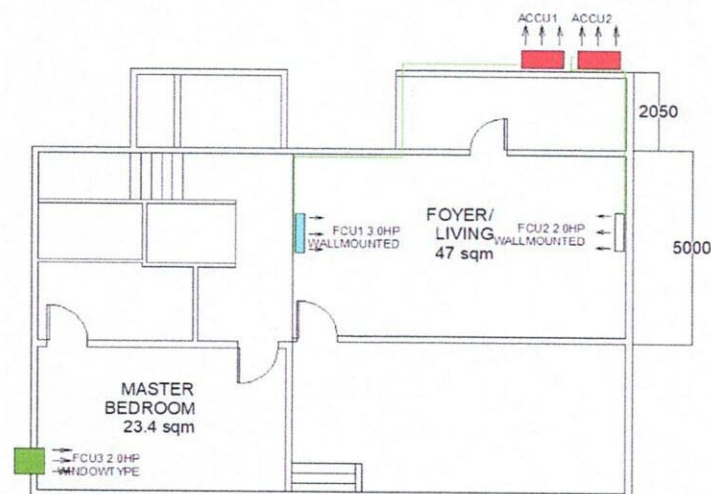

Total Estimated Charges	P 60,210.00
--------------------------------	--------------------

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Note:

- 1 Location of indoor and outdoor units base in floor plan.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for site visit before installation and for final location of units.
- 4 Customer need to cover the side of windowtype if unit is smaller than existing hole.
- 5 KA-150MCARINV32 Dimension: W x D x H, = 450.6 X 675 x 350 mm. (17.7 x 26.6 x 13.8 inches)
- 6 KA-200MCARINV32 Dimension: W x D x H, = 660 X 780 x 428 mm. (26 x 30.7 x 16.8 inches)
- 7 Working days: Monday to Saturday, 8am- 5pm with parking.Need working permit.
- 8 Mechanical Plans, Permits, Electrical permits not included.
- 9 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 10 Electrical power supply (feeder line) 220v/ 60hz/ 1ph , is not included in the scope of work of Kolin.
- 11 Final charges will be based on actual installation.

Prepared by:

Jeffrey Dadios

Field Surveyor

Reviewed by:

Engr. Kenneth Zamora

Service Supervisor

Field and Shop Operation

Customer Conformance:

Signature Over Printed Name