



May 5, 2025

B&B DINING INC.
138 KATIPUNAN ST., BRGY. ST. IGNATIUS, QUEZON CITY
TEL#: 0906-6988716
Email: regulatory@wplates.com

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
4	UNIT/S	MODEL: KSG-IWF-30WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	51,212.20	PHP	204,848.80
1	UNIT/S	MODEL: KA-75MCARINV32 KOLIN WINDOW TYPE CREO SERIES AIRCONDITIONER 8,400 Kj/h (.75HP) FULL DC INVERTER R-32 WITH REMOTE (WxDxH) 17.7"x26.6"x13.8"	22,495.00	16,496.20	PHP	16,496.20
TOTAL UNIT COST					PHP	221,345.00
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	136,275.10
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	358,220.10

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual).

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:

MART NATHANIEL R. FLORES
KMI-SUPERVISOR


Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-04-25-0260-rev1
REG-24%/7K

Conforme:

SIGNATURE OVER PRINTED NAME

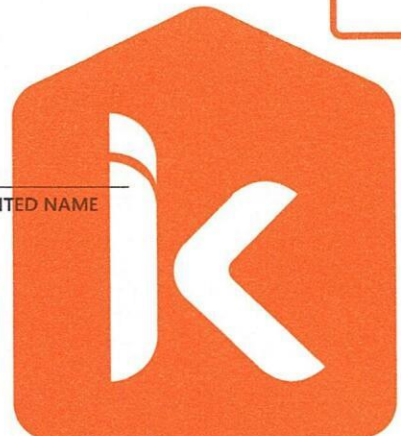

MJRC AIRCONDITIONING SERVICES

#68 Kabalitang St. Brgy.Krus Na Ligas Quezon City
 2453114 / 09062456002 / 09272733186
 Email Add: mjrc.airconditioning@gmail.com

QUOTATION

May 02,2025

B&B Dining Inc.

#138 Katipunan St. Brgy.St. Ignatius

Quezon City

Please see the below prices for your reference

QTY	DESCRIPTION	UNIT PRICE	AMOUNT
GROUND FLOOR - DINING AREA			
1	Installation of 3.0hp Wall Mounted Split type Kolin Inverter		
	1st 10ft	8,500.00	
	Excess 50ft	20,000.00	
	Royal Cord (comm wire) 2.mm2 x 4C 55ft	5,500.00	
	Royal Cord (ACCU-Breaker) 3.5mm x 3c 5ft	300.00	
	Circuit Breaker 30A/1Ph 1pc	1,000.00	
	Rubber Insulation 2 1/8"x3/4" 8pcs	2,800.00	
	Full Thread 3m 1pc	150.00	
	Pipe Hanger 3inches 10pcs.	1,200.00	
	Chipping works 1m	500.00	
	Drain hose white 1/2" 5ft	125.00	
			40,075.00
ACU 2			
1	Installation of 3.0hp Wall Mounted Split type Kolin Inverter		
	1st 10ft	8,500.00	
	Excess 33ft	13,200.00	
	Royal Cord (comm wire) 2.mm2 x 4C 38ft	3,800.00	
	Royal Cord (ACCU-Breaker) 3.5mm x 3c 5ft	300.00	
	Circuit Breaker 30A/1Ph 1pc	1,000.00	
	Rubber Insulation 2 1/8"x3/4" 6pcs	2,100.00	
	Full Thread 3m 2pcs	300.00	
	Pipe Hanger 3inches 8pcs.	960.00	
	Chipping works 1m	500.00	
	Drain hose white 1/2" 5ft	125.00	
			30,785.00

ACU 3			
1	Installation of 3.0hp Wall Mounted Split type Kolin Inverter		
	1st 10ft	8,500.00	
	Excess 53ft	21,200.00	
	Royal Cord (comm wire) 2.mm2 x 4C 58ft	5,800.00	
	Royal Cord (ACCU-Breaker) 3.5mm x 3c 5ft	300.00	
	Circuit Breaker 30A/1Ph 1pc	1,000.00	
	Rubber Insulation 2 1/8"x3/4" 6pcs	2,100.00	
	Full Thread 3m 2pcs	300.00	
	Pipe Hanger 3inches 8pcs.	960.00	
	Chipping works (drain) 5m	2,500.00	
	PVD (drain line)	300.00	
	Drain hose white 1/2" 5ft	125.00	
			43,085.00
SECOND FLOOR / DINING AREA			
1	Installation of 3.0hp Wall Mounted Split type Kolin Inverter		
	1st 10ft	8,500.00	
	Excess 27ft	10,800.00	
	Royal Cord (comm wire) 2.mm2 x 4C 34ft	3,400.00	
	Royal Cord (ACCU-Breaker) 3.5mm x 3c 5ft	300.00	
	Circuit Breaker 30A/1Ph 1pc	1,000.00	
	Rubber Insulation 2 1/8"x3/4" 6pcs	2,100.00	
	Full Thread 3m 1pc	150.00	
	Pipe Hanger 3inches 10pcs.	1,200.00	
	Chipping works (drain) 5m	500.00	
	Drain Pump	2,900.00	
	Drain hose (for drain pump) 35ft	350.00	
	PVC Drain Line 3/4" 2pcs	300.00	
	Drain hose 5ft	125.00	
	Scaffolding 3sets	1,500.00	
			33,125.00
		Sub total	147,070.00
		Less 7% Discount	10,294.90
		Less survey fee	500.00
		Total	136,275.10

INSTALLATION INCLUSION:

- 1.Labor cost for back to back installation
- 2.Addiotnal copper tubing,rubber insulation,field or communication wiring and drain piping

3. Boring of holes through CHB wall up to 8 inches wall thickness and up to 4 inches diameter.
4. Installation of outdoor up to 6ft elevation.
5. Applicable to expose piping and drainage.
6. Polythelene tape covering the insulated refrigerant piping, wiring and drain piping.
7. Flexible hose insulating field / communicating wiring.

INSTALLATION EXCLUSION:

1. Extra installation work required by the customer (subject to additional charges which will be determined on the site)
2. Concrete chipping, glass cutting, wall plastering and restoration.
3. Circuit breaker and power connection from breaker to main source.
4. Ducting and Ventilation of outdoor unit.
5. Use of scaffolding for Overhead Installation.

THANK YOU FOR YOUR BUSINESS

Phoebe Masuba

Prepared by

Conformme