



May 7, 2025

CHOWKING TUTUBAN
ATTN: MR. JIMMY GRATUITO
TEL#: 0921-4096177

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KLM-SF70-4F1M410 KOLIN FLOOR MOUNTED AIRCONDITIONER 56,970 Kj/h (5.0TR) NON-INVERTER R-410A SINGLE PHASE	110,995.00	81,356.20	PHP	81,356.20
TOTAL UNIT COST					PHP	81,356.20
ESTIMATED COST OF INSTALLATION (please see attached) w/ dismantling of old unit					PHP	22,965.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	104,921.20

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.


**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately.**


We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

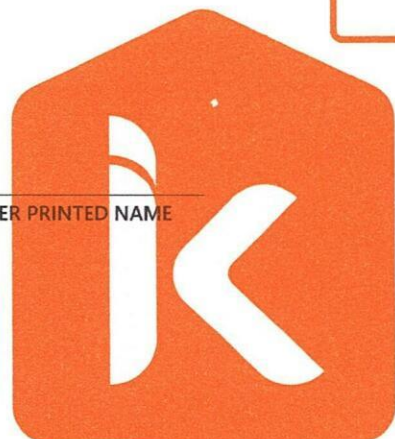

JANELLE S. LIM
KMI-ASSISTANT

Noted by:

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-05-25-0358
ECY-24%/3K

Conforme: _____
SIGNATURE OVER PRINTED NAME



KOLIN Philippines International Inc.
Survey Form

No 003635

Customer Name : CHOWKING - TUTUBAN BRANCH Date : 5-6-25
 Address : CHOWKING CT COMPLETO, TUTUBAN, MARILAO, BULACAN SJR No. : 2837

Establishment Type : Residential ☐ Area Surveyed :
 Commercial ☒ Area Surveyed : DINILG XREF

Recommended Product Model : KLM SF70 - 417W410

Cooling Capacity Computation

Floor Area : 163.6 sqm.
 Ceiling Height : 2.8 mtr.

note: add 20% per meter in excess of 3 meters in the initial cooling capacity computed.

Floor Area :	<u>163.6</u>	x	550 Btu/h	<u>89980</u>	Btu/h
Ceiling Height (excess of 3 mtrs.) :		x	20%		Btu/h
Window Direct Sunlight		x	20% - 50%		Btu/h
Total Cooling Capacity				<u>89980</u>	Btu/h

Add : Additional Heat Load

No. of Person	<u>100</u>	x	300 Btu/h	<u>30000</u>	Btu/h
No. of Ordinary Light (<40w)	<u>80</u>	x	200 Btu/h	<u>16000</u>	Btu/h
No. of Special Light (>40w)		x	400 Btu/h		Btu/h
No. of Refrigerator (< 6 cu.ft.)		x	400 Btu/h		Btu/h
No. of Refrigerator (> 6 cu.ft.)	<u>2</u>	x	800 Btu/h	<u>1600</u>	Btu/h
No. of Cooking Range		x	1500 Btu/h		Btu/h
No. of Laptop Computer	<u>2</u>	x	150 Btu/h		Btu/h
No. of Desktop Computer	<u>2</u>	x	400 Btu/h	<u>800</u>	Btu/h
No. of Printer		x	500 Btu/h		Btu/h
No. of Photocopier		x	1000 Btu/h		Btu/h
Total Cooling Capacity				<u>42400</u>	Btu/h

Recommended Cooling Capacity

15.3
136380 Btu/h

Note : Compressor warranty will be reduced to ____ yr. if air-conditioner purchased is lower than the recommended cooling capacity or pipe lay-out is beyond the maximum allowable length.

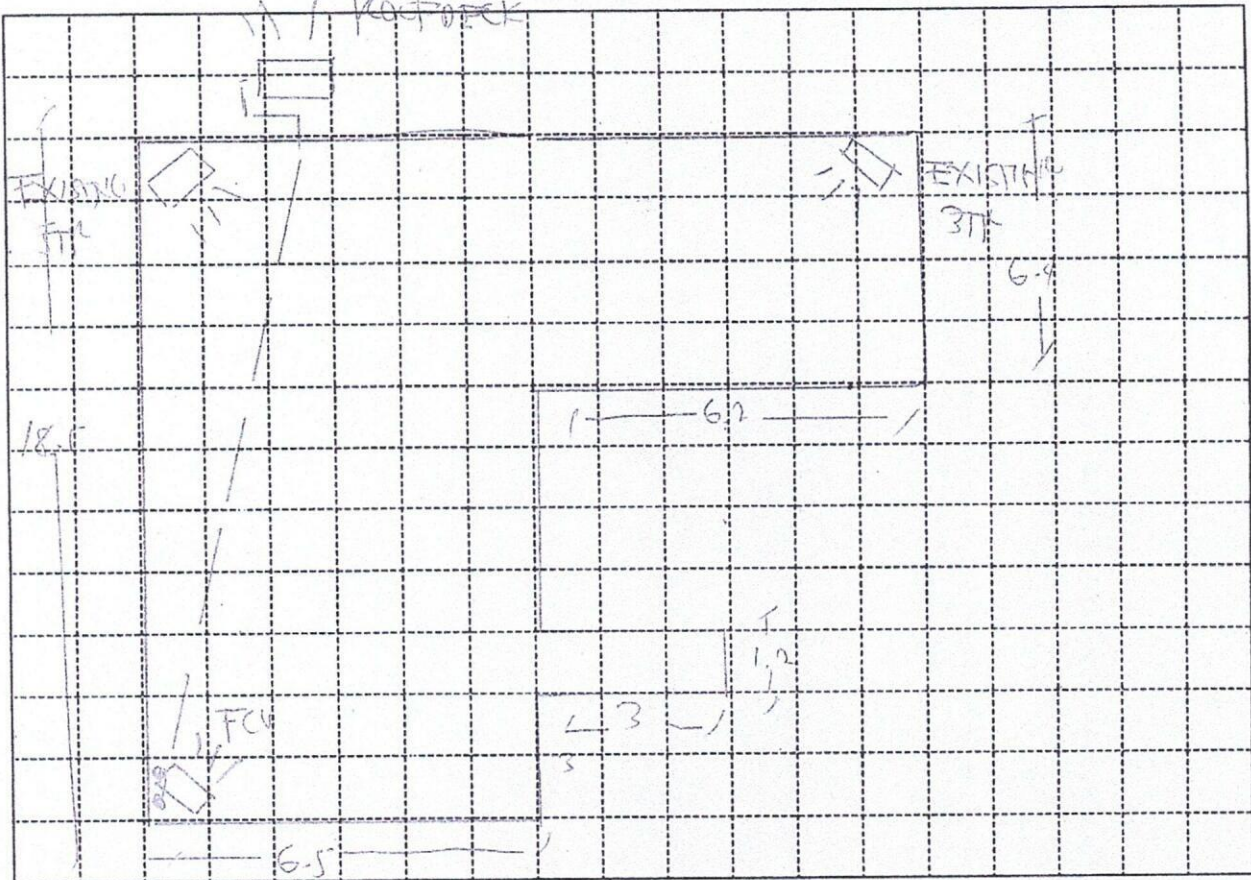
Scope of Work Agreement

- | | | |
|-----------------------------------|---|--|
| 1. Copper tube lay-out | ☐ Expose | ☒ Embedded |
| 2. Chipping | ☐ Included | ☒ Not Included |
| 3. Fabricated Bracket | ☒ Yes ☐ Shop | ☒ Site ☐ No |
| 4. Service Ledge | ☐ Yes | ☒ No |
| 5. Dismantling of existing Aircon | ☒ Included | ☐ Not Included |
| 6. Ducting | ☐ Yes | ☒ No |

Dimension :

- Plastering, carpentry and restoration works are to be done by the customer.
- Wiring of electrical supply from main panel to air-conditioning unit are to be done by the customer.
- Processing of mechanical plan, working permit, electrical permit are to be done by the customer.
- Other concern;

DISMANTLE AND LEAVE OFF EXISTING
COPPER TUBE. EXISTING 1/2 X 3/4 8' W/ 1/2"
FAKED OUTDOOR BRACKET (MODIFY)
NEED WORKING PERMIT & PAX
CUSTOMER COLLECT POWER SUPPLY TO SINGLE PHASE.
EXTEND COPPER TUBE FROM 1/2 TO 3/4
WITH EXISTING OF STD AND STD FLOOR (MODIFY).



Indoor Unit Location : LEFT LOWER CORNER, SAME LOCATION
 Outdoor Unit Location : AT ROOF DECK
 Pipe Length (32 m) : 10 FT
 Special Note :

Installation Cost Estimate

Material Description	Qty.	Unit Cost	Total Cost
Copper Tube (excess of 10 ft.) 3/8" x 3/4" 2330, 2430, 2520, 3520, 4620	10	—	—
Wire (Royal Cord-signal wire) (excess of 10ft.) 2.0mmx4C	10	—	—
Wire (Royal Cord - Breaker to ODU) 3.5mm / 5.5mm x 3C	10	490	490
Circuit Breaker 20A, 30A, 40A/1ph, 40A/3ph	1	1000	1000
Bracket (ODU) (Imptd./Fabricated) (Floor/Wall)	1	2500	2500
Bracket (WAC) Angle Type			
PVC Pipe (drain) 1/2", 3/4"			
PVC Pipe (electrical) 3/4", 1"			
Drain Pump			
Drain Pump Hose 1/2"	10	175	175
Chipping Works mtr.			
Dismantling Fee (existing air-conditioner) 5 T/2			3000
Initial Charge			4000
TOTAL ESTIMATE			P 21,165

Note :

- Initial Charge includes labor, 10ft. Copper tube, 10ft. Royal cord, Circuit breaker, Outdoor Bracket (SAC), Indoor Bracket (PAC) and Consumable materials.
- Survey fee will be deducted in the installation fee.

Leak testing existing copper tube 1,800

P 22,965

Prepared by:

JEOPHILYN D. DROS
 Signature Over Printed Name

Customer Conforms:

SEND TO SIR JIMMY
 Signature Over Printed Name