



May 9, 2025

MR. BRYAN DY  
UNIT 8, FIREFLY ST. WESTWOOD LANE VALLE VERDE, BRGY. UGONG, PASIG CITY  
TEL#: 0917-8927939

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSG-IWF-25WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	45,436.20 7	PHP	45,436.20
1	UNIT/S	MODEL: KSG-IWF-20WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 19,000 Kj/h (2.0HP) FULL DC INVERTER W/ WIFI R-32	59,595.00	38,292.20	PHP	38,292.20
TOTAL UNIT COST					PHP	83,728.40
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	32,150.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	116,478.40

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.


PRICES IS VAT INCLUSIVE.

**\*\* Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at [kmi\\_asst@kolinphil.com.ph](mailto:kmi_asst@kolinphil.com.ph)

Very Truly Yours,

  
ANELLEN S. LIM  
KMI-ASSISTANT

Noted by:

  
MART NATHANIEL R. FLORES  
KMI-SUPERVISOR

Approved By:

  
MS. EDITHA M. FLORES  
AVP - FINANCE

KMI-QUOTE-05-25-0369  
REG-24%/7K

Conforme:


SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

 [www.kolinphil.com.ph](http://www.kolinphil.com.ph) / [kolinphilippines](http://kolinphilippines)



May 9, 2025

BRYAN DY

Unit 8, 15 Firefly St. Westwood Lane, Valle Verde Brgy Ugong Pasig City

0917-8927939

MODEL	Qty
KSG-IWF-25Wfy8K1M32	1
KSG-IWF-20Wfy8K1M32	1

<b>KITCHEN</b>	Area	25 sqm
----------------	------	--------

ACU 1    2.5 HP Wall Mounted Inverter    *KSG-IWF-25Wfy8K1M32*

Estimated Pipe Length    =    23 ft

Estimated Royal Cord Length =    28 ft

Initial Charge    ₱ 8,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	13 ft	₱ 400.00/ft	₱ 5,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	18 ft	₱ 100.00/ft	₱ 1,800.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	2 pc/s	₱ 350.00/pc	₱ 700.00
Dismantle	1.5HP Wall Mounted	1 set	₱ 2,500.00/set	₱ 2,500.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 11,800.00

<b>Estimated Charges</b>	₱ 20,300.00
--------------------------	-------------

<b>MASTER BEDROOM</b>	Area	23 sqm
-----------------------	------	--------

ACU 2    2.0 HP Wall Mounted Inverter    *KSG-IWF-20Wfy8K1M32*

Estimated Pipe Length    =    15 ft

Estimated Royal Cord Length =    20 ft

Initial Charge    ₱ 7,500.00

Includes:

Labor

10ft Copper Tube


10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 1/2"	5 ft	₱ 350.00/ft	₱ 1,750.00
Royal Cord (comm. wire)	2.mm2 x 4C	10 ft	₱ 100.00/ft	₱ 1,000.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 4,350.00

<b>Estimated Charges</b>	₱ 11,850.00
--------------------------	-------------

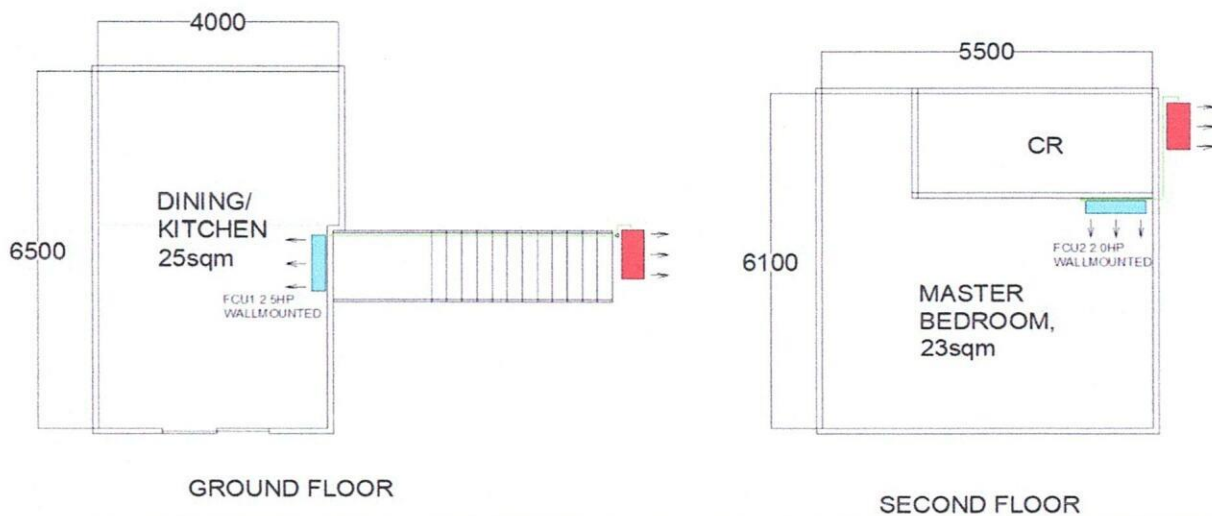

<b>Total Estimated Charges</b>	<b>P 32,150.00</b>
--------------------------------	--------------------

**Validity:** This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

**Installation notes:**

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for site visit and markings of drainline and lay out of coppertube.
- 4 Working days: Monday to Saturday, 8am- 5pm with parking. Need working permit.
- 5 Mechanical Plans, Permits, Electrical permits not included.
- 6 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 7 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , should be provided by customer's contractor.
- 8 **Final charges will be based on actual installation.**

Prepared by:

*Jeffrey Dadios*  
**Jeffrey Dadios**  
 Field Surveyor

Customer Conformance:

\_\_\_\_\_  
 Signature Over Printed Name

Reviewed by:

*Engr. Kenneth Zamora*  
**Engr. Kenneth Zamora**  
 Service Supervisor Shop and  
 Field Operation