



November 24, 2025

BROWLESQUE AESTHETIC CLINIC
2ND FLOOR, BEL-AIR PETRON, BRGY. BEL-AIR, MAKATI CITY
ATTN: MR. RB ZALAMEA
TEL#: 0917-8230572

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION - revision

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
2	UNIT/S	MODEL: KSG-IWF-30WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	51,212.20	PHP	102,424.40
1	UNIT/S	MODEL: KSM-IW25-WCT10M1M32 KOLIN WALL MOUNTED CERTUS AIRCONDITIONER 23,210 Kj/h (2.5HP) REGULAR INVERTER W/ WIFI R-32	49,995.00	33,996.20	PHP	33,996.20
TOTAL UNIT COST					PHP	136,420.60
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	117,865.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	254,885.60

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

BANK DETAILS:

* Unit/s & Delivery: Account Name - KOLIN MARKETING INC. / Account# - 011808002307 (BDO-KALAYAAN)

* Installation: Will be provided by assigned installer.

** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted By:

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

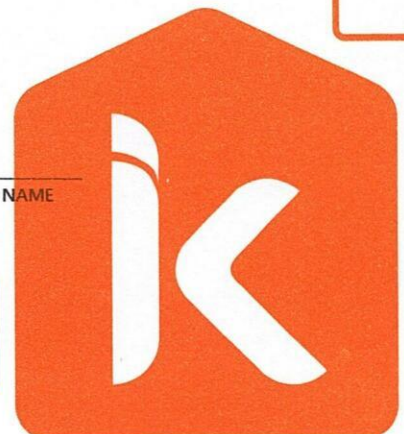
Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-11-25-0792-rev
REG-24%/7K/4K

Conforme: _____
SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.
1854 Sta. Rita St., Guadalupe Nuevo, Makati City
Tel.: (632) 8852-6473
Fax: (632) 8852-2170 / (632) 8852-4792
 www.kolinphil.com.ph / kolinphilippines



NOVEMBER 24, 2025
 BROWLESQUE AESTHETIC CLINIC
 2nd Floor, Bel-Air Petron, Brgy Bel- Air Makati City
 0917-8230672

MODEL	Qty
KSG-IWF-30Wfy8K1M32	2
KSG-IWF-25Wfy8K1M32	1

revision1

LOUNGE	Area	57 sqm
--------	------	--------

ACU 1	3.0 HP Wall Mounted Inverter	KSG-IWF-30Wfy8K1M32			
	Estimated Pipe Length = 63 ft				
	Estimated Royal Cord Length = 68 ft				
	Initial Charge				₱ 7,700.00
	Includes:				Less Outdoor bracket
	10ft Copper Tube				
	10ft Royal Cord				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Copper Tube	Ø 1/4" x Ø 5/8"	53 ft	₱ 400.00/ft	₱ 21,200.00
	Royal Cord (comm. wire)	2.mm2 x 4C	58 ft	₱ 100.00/ft	₱ 5,800.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00
	Circuit Breaker waterproof	30A	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	Rubber Insulation	2 1/8" x 3/4" x 6'	8 pc/s	₱ 350.00/pc	₱ 2,800.00
	Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
	Metal Clamp	3"	12 pc/s	₱ 120.00/pc	₱ 1,440.00
	Outdoor bracket	Fabricated floor	1 pc/s	₱ 2,500.00/pc	₱ 2,500.00
	Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
					₱ 35,635.00

Estimated Charges	₱ 43,335.00
--------------------------	--------------------

ACU 2	3.0 HP Wall Mounted Inverter	KSG-IWF-30Wfy8K1M32			
	Estimated Pipe Length = 60 ft				
	Estimated Royal Cord Length = 65 ft				
	Initial Charge				₱ 7,700.00
	Includes:				Less Outdoor bracket
	Labor				
	10ft Copper Tube				
	10ft Royal Cord				
	Consumables				
	Installation Materials	Description	Qty	Price per qty	Subtotal
	Copper Tube	Ø 1/4" x Ø 5/8"	50 ft	₱ 400.00/ft	₱ 20,000.00
	Royal Cord (comm. wire)	2.mm2 x 4C	55 ft	₱ 100.00/ft	₱ 5,500.00
	Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00
	Circuit Breaker waterproof	30A	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
	Rubber Insulation	2 1/8" x 3/4" x 6'	8 pc/s	₱ 350.00/pc	₱ 2,800.00
	Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
	Metal Clamp	3"	12 pc/s	₱ 120.00/pc	₱ 1,440.00
	Outdoor bracket	Fabricated floor	1 pc/s	₱ 2,500.00/pc	₱ 2,500.00
	Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
					₱ 34,135.00

Estimated Charges	₱ 41,835.00
--------------------------	--------------------

TREATMENT ROOM & MAKE UP ROOM

Area 22.3 sqm

ACU 3 2.5 HP Wall Mounted Inverter**KSG-IWF-25Wfy8K1M32**

Estimated Pipe Length = 37 ft

Estimated Royal Cord Length = 42 ft

Initial Charge

Includes:

Labor

10ft Copper Tube

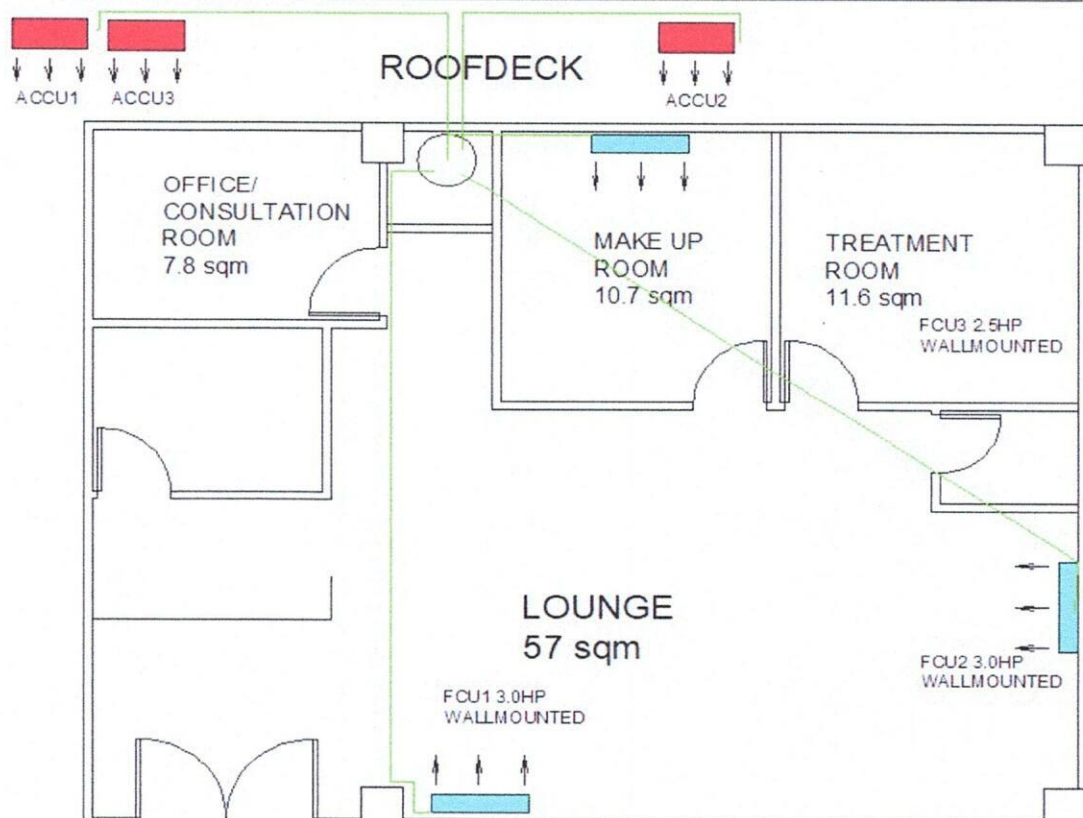
10ft Royal Cord

Consumables

P 7,700.00

Less Outdoor
bracket**Installation Materials**

Description	Qty	Price per qty	Subtotal
Copper Tube	27 ft	P 400.00/ft	P 10,800.00
Royal Cord (comm. wire)	32 ft	P 100.00/ft	P 3,200.00
Royal Cord (ACCU-Breaker)	7 ft	P 60.00/ft	P 420.00
Circuit Breaker waterproof	30A	1 pc/s P 1,000.00/pc	P 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	3 pc/s P 350.00/pc	P 1,050.00
Rubber Insulation(DRAINLINE)	1 1/8" x 3/8" x 6'	4 pc/s P 150.00/pc	P 600.00
Full thread	3/8" x 10'	1 pc/s P 150.00/pc	P 150.00
Metal Clamp	3"	10 pc/s P 120.00/pc	P 1,200.00
Outdoor bracket	Fabricated floor	1 pc/s P 2,500.00/pc	P 2,500.00
PVC blue	3/4" x 10'	3 pc/s P 150.00/pc	P 450.00
Drain pump		1 pc/s P 2,950.00/pc	P 2,950.00
Drain pump hose	50 ft	P 10.00/ft	P 500.00
Drain Hose	White -1/2"	7 ft P 25.00/ft	P 175.00
			P 24,995.00

Estimated Charges**P 32,695.00**

Total Estimated Charges

P 117,865.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 Mechanical Plans, Permits, Electrical permits not included.
- 3 All Units Need backing for indoor. Customer contractor will chip the floor and wall for drainline.
- 4 Customer contractor need to enlarge the existing hole of units going up for the lay out of coppertube and wires.
- 5 Need exhaust fan inlet and outlet of air , for 2 areas, MAKE UP & TREATMENT ROOM.**
- 6 Need for site visit, and marking, for the lay out of drainline and coppertube expose coppertube in the area.
- 7 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 8 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , should be provided by customer's contractor.
- 9 Final charges will be based on actual installation.**

Prepared by:


Customer Conformer:

Jeffrey T. Dadios

Field Surveyor

Signature Over Printed Name

Reviewed by:


Engr. Kenneth Zamora