

June 5, 2025

LOPA COMPOUND DEVELOPMENT / HOUSE #6 JOEL
LOPA FARM MARILAQUE HIWAY, SITIO MAYAGAY, BRGY. SAMPALOC TANAY RIZAL
Email: mereyes@foro.ph

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SCRIPTION SRP DISCOUNTED PRICE			AMOUNT	
2	UNIT/S	MODEL: KSG-IWF-25WFY-8K1M32 INIT/S KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 68,995.00 45,436.20 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32				90,872.40	
1	UNIT/S	UNIT/S MODEL: KA-200MCARINV32 KOLIN WINDOW TYPE CREO SERIES AIRCONDITIONER 19,800 Kj/h (2.0HP) FULL DC INVERTER R-32 WITH REMOTE (WxDxH) 26"x30.7"x16.8" 36,995.00 26,				26,916.20	
2	UNIT/S	MODEL: KA-150MCARINV32 KOLIN WINDOW TYPE CREO SERIES AIRCONDITIONER 12,800 KJ/h (1.5HP) FULL DC INVERTER R-32 WITH REMOTE (WxDxH) 17.7"x26.6"x13.8"	27,995.00	20,276.20	РНР	40,552.4	
TOTAL UNIT COST						158,341.00	
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	53,230.00	
OTHERS: DELIVERY CHARGE					PHP	600.00	
TOTAL ESTIMATED COST OF THE PROJECT						212,171.00	

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE: ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB, TEN (10) YEARS WARRANTY ON COMPRESSOR. FOR WINDOW TYPE: ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB, TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual).

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

** SUBJECT FOR ACTUAL SITE VISIT / OCULAR **

Very Truly Yours,

JANELLEN S. LIN KMI-ASSISTANT

- A

MART NATHANIEL R. FLORES KMI-SUPERVISOR

KMI-QUOTE-04-25-0269-rev3 DCG-24%/7K/1.2K/1K Approved By:

MS. EDITHA M. FLORES AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792 www.kolinphil.com.ph / kolinphilippines





June 4, 2025

LOPA COMPOUND DEVELOPMENT/ HOUSE #6 JOEL

Lopa Farm Marilaque Hiway Sitio Mayagay, Brgy Sampaloc Tanay Rizal


MODEL

KSG-IWF-25WFY8K1M32

	KSG-IWF-25WFY8K1M32 2 KA-200MCARINV32 1								
			1						
DE1 12	KA-150CARINV32 2								
REV3	51.000								
GROUND	IVING AREA						A		F7
ACU 1	2.5hp Wall mounted Inverter		VCC IIVIC 3EI	AIFVO	V18422		Area	~	57 sq.m
ACO I	Estimated Pipe Length :	33	KSG-IWF-251	VFIO	KIIVISZ				
	Estimated Royal Cord Length:	38	ft						
	Initial Charge	50	10					Р	8,500.00
	Includes:							1	8,500.00
	Labor								
	10ft Copper Tube								
	10ft Royal Cord								
	Outdoor Bracket								
	Other Consumables								
	Additional Charges	Description	Unit		Price Per Unit		Subtotal		
	Copper Tube	1/4"x 5/8"	23 ft	Р	400.00 / ft	Р	9,200.00		
	Royal Cord	2.mm2 x 4C	28 ft	Р	100.00 / ft	Р	2,800.00		
	Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	Р	60.00 / ft	Р	300.00		
	Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	Р	1,000.00 / pc	Р	1,000.00		
	PVC(Drainline)	Blue 3/4"	2 pc(s)	Р	150.00 / pc	Р	300.00		
	Rubber Insulation	2 1/8"x3/4" x 6'	5 pc(s)	P	350.00 / pc	P	1,750.00		
	Full Thread	3 meters	1 pc(s)	P	150.00 / pc	P	150.00		
	Pipe hanger	3 inches	8 pc(s)	Р	120.00 / pc	P	960.00	Р	16,460.00
			1, 1970						
	Estimated Charges							Р	24,960.00
	2.51-20-11		W00 HW0 051		V45400				
ACU 2	2.5hp Wall mounted Inverter	20	KSG-IWF-251	WFY8	K1W32				
	Estimated Pipe Length :	30	ft						
	Estimated Royal Cord Length:	35	ft					0	8 500 00
	Initial Charge Includes:							Р	8,500.00
	Labor								
	10ft Copper Tube								
	10ft Royal Cord								
	Outdoor Bracket								
	Other Consumables								
	Additional Charges	Description	Unit		Price Per Unit		Subtotal		
	Copper Tube	1/4"x 5/8"	20 ft	Р	400.00 / ft	Р	8,000.00		
	Royal Cord	2.mm2 x 4C	25 ft	Р	100.00 / ft	P	2,500.00		
	Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P	60.00 / ft	P	300.00		
	Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	P	1,000.00 / pc	P	1,000.00		
	PVC(Drainline)	Blue 3/4"	2 pc(s)	Р	150.00 / pc	P	300.00		
	Rubber Insulation	2 1/8"x3/4" x 6'		Р	350.00 / pc	P	1,400.00		
	Full Thread	3 meters	1 pc(s)	P	150.00 / pc	Р	150.00		
	Pipe hanger	3 inches	6 pc(s)	P	120.00 / pc	Р	720.00	Р	14,370.00
	,		- 1-1-7		,			334	
	Estimated Charges							Р	22,870.00
0.0.0	2.05000044								22.4
ACU3	2.0hp Windowtype Inverter		KA-200	MCA	RINV32		Area	~	23.4 sq.m
ACUS	2.onp windowtype inverter		KA-200	IVICA	NIIV JZ				
	Initial charge							Р	1,200.00
	Angle Bracket							P	600.00
	Estimated charges							Р	1,800.00
	Beautiful Commission C								

QUANTITY

2

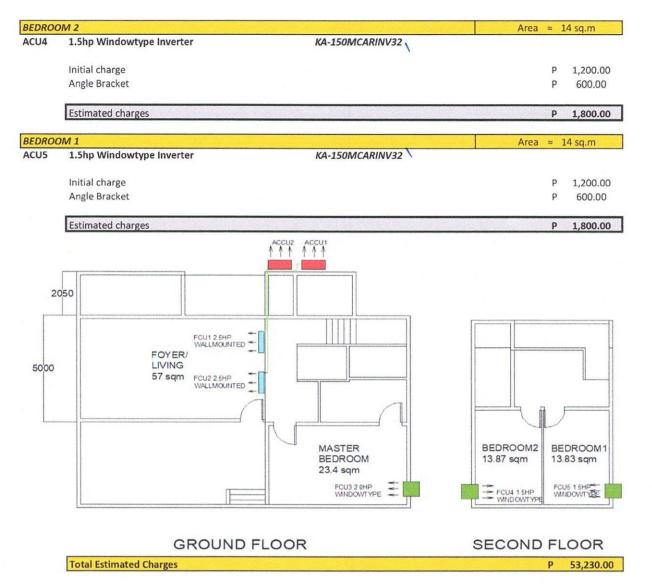

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Note:

- 1 Location of indoor and outdoor units base in floor plan.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for site visit before installation and for final location of units.
- 4 Customer need to cover the side of windowtype if unit is smaller than existing hole.
- 5 KA-150MCARINV32 Dimension: W x D x H, = 450.6 X 675 x 350 mm. (17.7 x 26.6 x 13.8 inches)
- 6 KA-200MCARINV32 Dimension: W x D x H, = 660 X 780 x 428 mm. (26 x 30.7 x 16.8 inches)
- 7 Working days: Monday to Saturday, 8am-5pm with parking.Need working permit.
- 8 Mechanical Plans, Permits, Electrical permits not included.
- 9 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 10 Electrical power supply (feeder line) 220v/60hz/1ph, is not included in the scope of work of Kolin.
- 11 Final charges will be based on actual installation.

Field and Shop Operation

Prepared by:	Customer Conformee:
Jeoffrey Dadios Field Surveyor	Signature Over Printed Name
Reviewed by:	