



October 15, 2025

NANO FORGE SOLUTIONS INC.
BLK 1 LOT 3 GOLDEN MILE BUSINESS PARK, MADUYA, CARMONA CAVITE
ATTN: MR. ARIEL COTTO
TEL#: 0915-5555135

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSG-IWF-25WFY-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	45,436.20	PHP	45,436.20
2	UNIT/S	MODEL: KL-IF60-G6H1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 58,140 Kj/h (5.0TR) FULL DC INVERTER R32 SINGLE PHASE	165,995.00	112,156.20	PHP	224,312.40
5	UNIT/S	MODEL: KLM-IC60-AA1M32 KOLIN FLOOR/CEILING AIRCONDITIONER 55,503 Kj/h (5.0TR) INVERTER R-32 SINGLE PHASE	151,995.00	115,516.20	PHP	577,581.00
TOTAL UNIT COST					PHP	847,329.60
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	431,650.00
OTHERS: DELIVERY CHARGE					PHP	600.00
TOTAL UNIT COST					PHP	1,279,579.60

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.
FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.
FOR FLOOR/CEILING: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).

*** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

KMI-QUOTE-10-25-0749
ECY-24%/7K/14K

Kolin Marketing, Inc.

1854 Sta. Rita St., Guadalupe Nuevo, Makati City

Tel.: (632) 8852-6473

Fax: (632) 8852-2170 / (632) 8852-4792

www.kolinphil.com.ph / kolinphilippines



ESCOOL

AIR CONDITIONING SERVICES

INSTALLATION • ESTIMATE • MAINTENANCE • SPLIT TYPE • WINDOW TYPE
PACKAGE TYPE • CEILING • CASSETTE • DOCT WORK • CHILLED WATER
WATER COOLED



0946 877 9572 / 09 06 294 6911 TEL. NO. 046 890 0438

escoolairconditioning@gmail.com

Blk. 19 Excess Lot Brgy. J.P. Eliss GMA Cavite

QUOTATION

010/10/2025

QTN: 0153

Attention; Sir Ariel Abraham Cotto

Address: B1 L3 Golden Mile, Business Park, Brgy. Maduya, CARMONA, Cavite

Contact no. 0915-5555135

Propose; Installation of multi split type air conditioner.

In compliance with your request, we are Pleased to submit our quotation below caption subject.

Mode of payment;

Bank account: UNION BANK# 002220008727.

50% Down payment INSTALLATION.

50% Upon commissioning start-up.

Server 18 sqm

2.5hp wall mounted (45feet pipe length)

First 10ft installation-----8,500.00

35 feet Excess pipe (450/foot)---15,750.00

Thicker rubber insulation 5/8 diameter

3/4 thickness

Royal cord 100/ft---3,500.00

Holing of ACCU above 6ft using Scalf holding 2 layer---3,000

TOTAL--- 30,750.00

- Office unit 1

6.0tr floor mounted (70 feet pipe length)

First 10ft installation-----14,000.00

60 feet existing pipe with thicker rubber (500/foot) ----30,000.00

Thicker rubber insulation 5/8 diameter

¾ thickness

Royal cord 100/foot---6,000

Holing of ACCU above 6ft---3,000

TOTAL---53,000.00

Office unit 2

6.0hp Ceiling (50 feet pipe length)

First 10ft installation-----14,000.00

40 feet excess pipe (600/foot) ----20,000.00

Thicker rubber insulation 5/8

¾ thickness

Royal cord 100/foot---4,000

Holing of accu above 6ft---3000

TOTAL---41,000.00

Lab 57 sqm

6.0 tr floor mouted(35 feet pipe length)

First 10ft installation-14,000.00

25 feet Excess pipe (500/foot)---12,500.00

Thicker Rubber insulation 5/8 diamter

3/4 thickness
Royal cord—2,400
Holing of ACCU above 6ft---3,000
TOTAL—31,900.00

Ground floor unit 1

6.0hp Ceiling suspended (65 feet pipe length)

First 10ft installation-----14,000.00
55 feet existing pipe with thicker rubber (500/foot) ----27,500.00
Thicker Rubber insulation 5/8 diameter
3/4 thickness
Royal cord---5,500.00
Holing of ACCU above 6ft---3,000

TOTAL---50,000.00

Ground floor unit2

Ceiling suspended (70 feet pipe length)

First 10ft installation---- 14,000.00
45 feet excess pipe with thicker rubber (500/foot) ----22,500.00
Thicker Rubber insulation 5/8 diameter
3/4 thickness
100/ft Royal cord---4,500
Holing of ACCU above 6ft---3,000

TOTAL—44,000.00

Ground floor unit 3

Ceiling suspended (60 feet pipe length)

First 10ft installation---- 14,000.00
50 feet excess pipe with thicker Rubber (500/foot) ----25,000.00
Thicker Rubber Insulation 5/8 diameter
3.4 thickness
100/ft Royal cord—5,000
Holing of ACCU above 6ft---3000

TOTAL—47,000.00

Ground floor unit 4

6.0hp Ceiling suspended (45feet pipe length)

First 10ft installation---- 14,000.00
35 feet excess pipe (500/foot) ----17,500.00
Thicker Rubber Insulation 5/8 diameter
3/4 thickness
Holing of ACCU above 6ft---3000
100/foot Royal cord—3,500

Total--- 38,000.00

Special fabrication of bracket 4-unit ACCU G unit 4, G unit 3, G unit 2 Accu second unit 4---20,000.00

Additional Pipe hunger bracket/Wall C Clamp—20,000

1" 15 pcs Excess PVC drain with drain line hanger and insulation—10,000

2pcs Water pump--- 6,000.00

4pcs Bracket ACCU G unit 1, ACCU Lab Floor, ACCU Ceiling Unit 1, Accu Server --- 20,000.00

NIGHT DIFFERENTIAL----- 20,000.00 *

GRAND TOTAL—431,650.00

WARRANTY OF INSTALLATION:

-90 DAYS WARRANTY WORKMANSHIP OF INSTALLATION.

PROVISION: *STANDARD INSTALLATION WORKS*****

- Installation of **copper tubes** from indoor to outdoor units with a maximum pipe length of 10ft.
- Electrical work**, include: **circuit breaker & electrical wire** from indoor to outdoor units.
- Circuit breaker (CB)** applies only from 2.0hp & above capacities.
- Drilling of hole** on CHB walls up to 8" (inches) thick (for refrigerant pipe pass thru).
- Installation of steel platform or hanger up to 6ft. in height for outdoor unit & drain pipe of 10ft.

*****EXCLUSION FROM STANDARD INSTALLATION WORKS*****

- In excess of 10 ft, on unit piping (Copper tubes) and electrical.
- Civil, carpentry and /or masonry works.
- Governments permit and mechanical plans.
- Exhaust deflectors.
- Under construction-project/job-site: Early layout of piping.
- Layout of electrical feeder lines (Electrical source to CB).
- Chipping works for imbedded pipes.
- Weather proof cladding of pipes.
- Service plat form 6ft and above, SAFETY issue for requiring to install service area for servicing of unit.

Should you decided to proceed with your preferred installation Set-up, kindly signify that you are fully aware of its non-compliance of standard installation as mentioned above which will void units Standards Manufacturer's Warranty.

NOTE; _____

CUSTOMER SHOULD PROVIDE SAFETY LADDER FOR SERVICING PURPOSES.

(Applicable for cantilever (s) for above six (6) feet and roof installation)

-I agree to the terms of conditions set her upon survey. I also agree to pay the corresponding amount for the standard installation rate, while the cost for all additional work will be paid directly to our installer team.

-Validity of quotation is only 30days upon approval.




FLOMAR D. ESCOL

ESCOOL, Representative:

Client's/Conform:

GROUND FLOOR

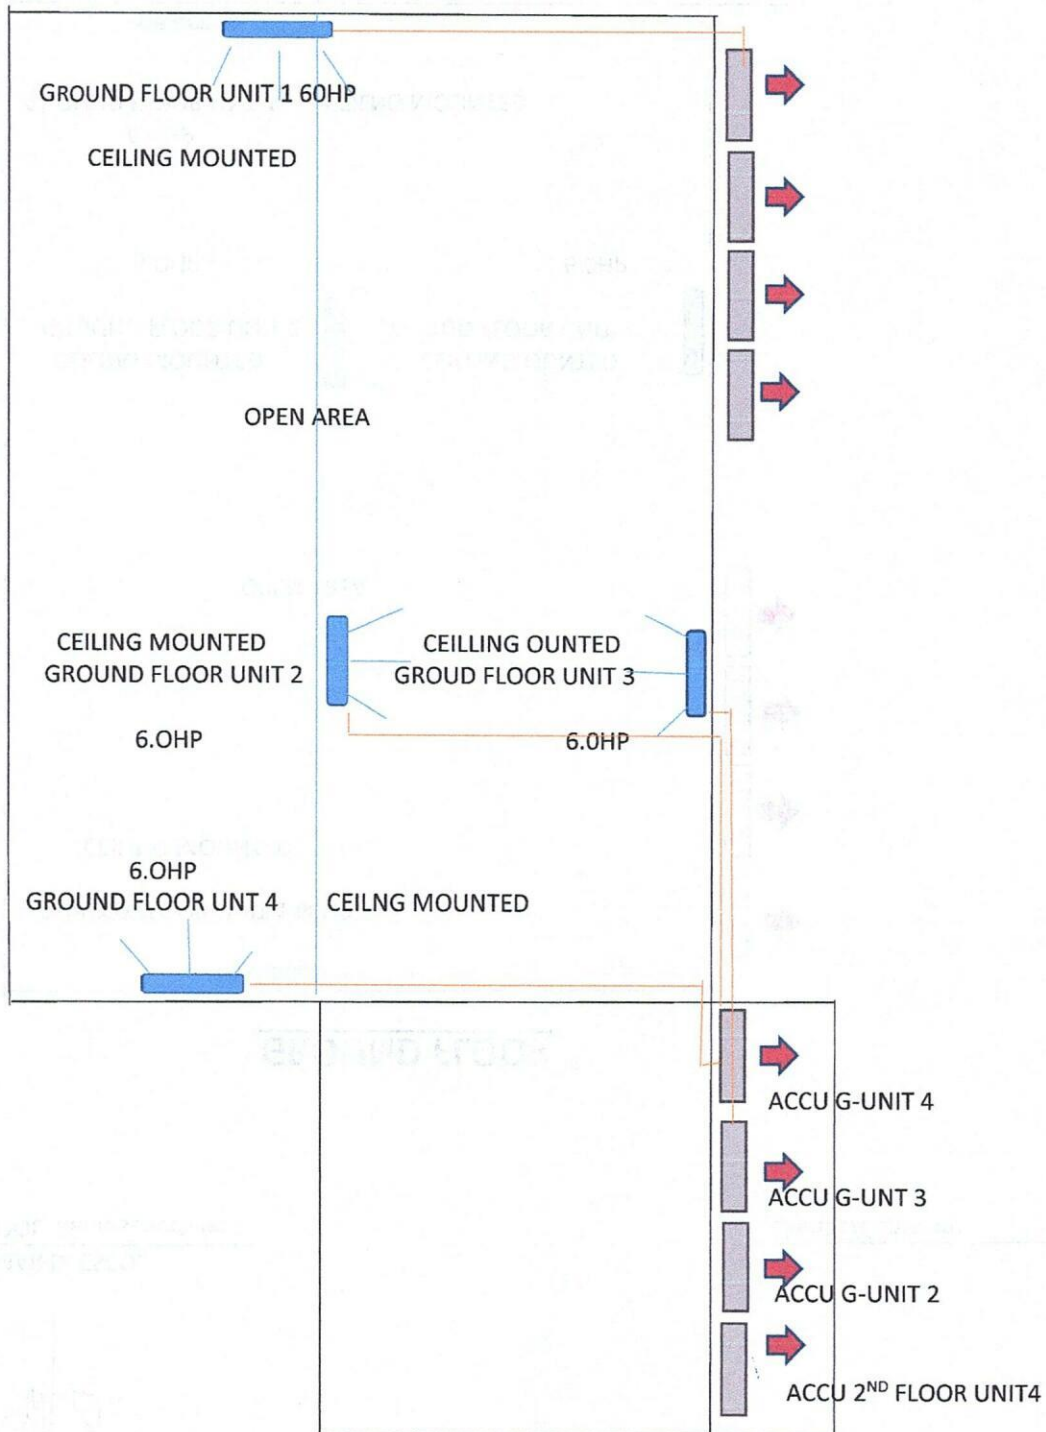

The floor plan is divided into several sections:

- Top Left:** FLOOR MOUNTED 6.0HP LAB 57SQM
- Top Center:** UNIT 1 CEILING MOUNTED 6.0HP
- Top Right:** 18SQM SERVER 2.5HP WALL MTD
- Center:** OFFICE AREA
- Bottom Left:** 2ND FLOOR UNIT 4
- Bottom Center:** 6.0HP FLOOR MOUNTED UNIT 2

Connections to ACCU units are shown on the right side:

- ACCU G-UNIT 1
- ACCU LAB FLOOR MNTD
- ACCU CEILING MNTD UNIT 1
- ACCU SERVER
- ACCU G-UNIT 4
- ACCU G-UNT 3
- ACCU G-UNIT 2
- ACCU 2ND FLOOR UNIT4