

NANO FORGE SOLUTIONS INC.
BLK 1 LOT 3 GOLDEN MILE BUSINESS PARK, MADUYA, CARMONA CAVITE
ATTN: MR. ARIEL COTTO
TEL#: 0915-5555135

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	ZERO RATED	DISCOUNTED PRICE		AMOUNT
1	UNIT/S	MODEL: KSG-IWF-25WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	61,602.68	39,818.04	PHP	39,818.04
2	UNIT/S	MODEL: KL-IF60-G6H1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 58,140 Kj/h (5.0TR) FULL DC INVERTER R32 SINGLE PHASE	165,995.00	148,209.82	98,639.46	PHP	197,278.93
5	UNIT/S	MODEL: KLM-IC60-AA1M32 KOLIN FLOOR/CEILING AIRCONDITIONER 55,503 Kj/h (5.0TR) INVERTER R-32 SINGLE PHASE	151,995.00	135,709.82	103,139.46	PHP	515,697.32
TOTAL UNIT COST							752,794.29
ESTIMATED COST OF INSTALLATION (please see attached)							431,650.00
OTHERS: DELIVERY CHARGE							600.00
TOTAL ESTIMATED COST OF THE PROJECT							1,185,044.29

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.
FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.
FOR FLOOR/CEILING: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICE IS ZERO RATED.

**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).**

***** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:
MARY NATHANIEL R. FLORES
KMI/SUPERVISOR


Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-10-25-0749-rev
ECY-24%/7K/14K

Conforme:

SIGNATURE OVER PRINTED NAME

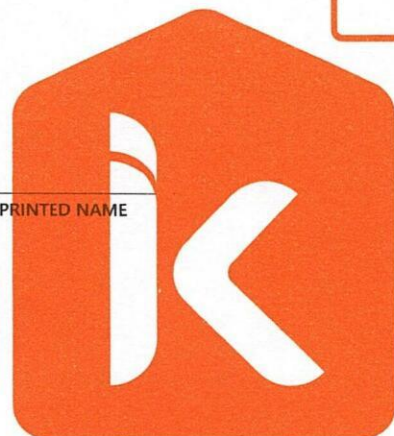



INSTALLATION • ESTIMATE • MAINTENANCE • SPLIT TYPE • WINDOW TYPE
PACKAGE TYPE • CEILING • CASSETTE • DOCT WORK • CHILLED WATER
WATER COOLED

0946 877 9572 / 09 06 294 6911 TEL. NO. 046 890 0438
escoolairconditioning@gmail.com
Blk. 19 Excess Lot Brgy. J.P. Eliss GMA Cavite

QUOTATION

010/10/2025

QTN: 0153

Attention; Sir Ariel Abraham Cotto

Address: B1 L3 Golden Mile, Business Park, Brgy. Maduya, CARMONA, Cavite

Contact no. 0915-5555135

Propose; Installation of multi split type air conditioner.

In compliance with your request, we are Pleased to submit our quotation below caption subject.

Mode of payment;

Bank account: UNION BANK# 002220008727.

50% Down payment INSTALLATION.

50% Upon commissioning start-up.

Server 18 sqm

2.5hp wall mounted (45feet pipe length)

First 10ft installation-----8,500.00
35 feet Excess pipe (450/foot)---15,750.00
Thicker rubber insulation 5/8 diameter
3/4 thickness
Royal cord 100/ft---3,500.00
Holing of ACCU above 6ft using Scalf holding 2 layer---3,000
TOTAL--- 30,750.00

- Office unit 1

6.0tr floor mounted (70 feet pipe length)

First 10ft installation-----14,000.00
60 feet existing pipe with thicker rubber (500/foot) ----30,000.00
Thicker rubber insulation 5/8 diameter
3/4 thickness
Royal cord 100/foot---6,000
Holing of ACCU above 6ft---3,000
TOTAL---53,000.00

Office unit 2

6.0hp Ceiling (50 feet pipe length)

First 10ft installation-----14,000.00
40 feet excess pipe (600/foot) ----20,000.00
Thicker rubber insulation 5/8
3/4 thickness
Royal cord 100/foot---4,000
Holing of accu above 6ft---3000
TOTAL---41,000.00

Lab 57 sqm

6.0 tr floor mouted(35 feet pipe length)

First 10ft installation-14,000.00
25 feet Excess pipe (500/foot)---12,500.00
Thicker Rubber insulation 5/8 diamter

¾ thickness
Royal cord—2,400
Holing of ACCU above 6ft---3,000
TOTAL—31,900.00

Ground floor unit 1

6.0hp Ceiling suspended (65 feet pipe length)

First 10ft installation-----14,000.00
55 feet existing pipe with thicker rubber (500/foot) ----27,500.00
Thicker Rubber insulation 5/8 diameter
¾ thickness
Royal cord---5,500.00
Holing of ACCU above 6ft---3,000

TOTAL---50,000.00

Ground floor unit2

Ceiling suspended (70 feet pipe length)

First 10ft installation---- 14,000.00
45 feet excess pipe with thicker rubber (500/foot) ----22,500.00
Thicker Rubber insulation 5/8 diameter
¾ thickness
100/ft Royal cord---4,500
Holing of ACCU above 6ft---3,000

TOTAL—44,000.00

Ground floor unit 3

Ceiling suspended (60 feet pipe length)

First 10ft installation---- 14,000.00
50 feet excess pipe with thicker Rubber (500/foot) ----25,000.00
Thicker Rubber Insulation 5/8 diameter
¾ thickness
100/ft Royal cord—5,000
Holing of ACCU above 6ft---3000

TOTAL—47,000.00

Ground floor unit 4

6.0hp Ceiling suspended (45feet pipe length)

First 10ft installation---- 14,000.00
35 feet excess pipe (500/foot) ----17,500.00
Thicker Rubber Insulation 5/8 diameter
¾ thickness
Holing of ACCU above 6ft---3000
100/foot Royal cord—3,500

Total--- 38,000.00

Special fabrication of bracket 4-unit ACCU G unit 4, G unit 3, G unit 2 Accu second unit 4---20,000.00

Additional Pipe hunger bracket/Wall C Clamp—20,000

1" 15 pcs Excess PVC drain with drain line hanger and insulation—10,000

2pcs Water pump--- 6,000.00

4pcs Bracket ACCU G unit 1, ACCU Lab Floor, ACCU Ceiling Unit 1, Accu Server --- 20,000.00

NIGHT DIFFERENTIAL----- 20,000.00 +

GRAND TOTAL—431,650.00

WARRANTY OF INSTALLATION:

-90 DAYS WARRANTY WORKMANSHIP OF INSTALLATION.

PROVISION: *STANDARD INSTALLATION WORKS*****

- Installation of copper tubes from indoor to outdoor units with a maximum pipe length of 10ft.
- Electrical work, include: circuit breaker & electrical wire from indoor to outdoor units.
- Circuit breaker (CB) applies only from 2.0hp & above capacities.
- Drilling of hole on CHB walls up to 8" (inches) thick (for refrigerant pipe pass thru).
- Installation of steel platform or hanger up to 6ft. in height for outdoor unit & drain pipe of 10ft.

*****EXCLUSION FROM STANDARD INSTALLATION WORKS*****

- In excess of 10 ft, on unit piping (Copper tubes) and electrical.
- Civil, carpentry and /or masonry works.
- Governments permit and mechanical plans.
- Exhaust deflectors.
- Under construction-project/job-site: Early layout of piping.
- Layout of electrical feeder lines (Electrical source to CB).
- Chipping works for imbedded pipes.
- Weather proof cladding of pipes.
- Service plat form 6ft and above, SAFETY issue for requiring to install service area for servicing of unit.

Should you decided to proceed with your preferred installation Set-up, kindly signify that you are fully aware of its non-compliance of standard installation as mentioned above which will void units Standards Manufacturer's Warranty.

NOTE; _____

CUSTOMER SHOULD PROVIDE SAFETY LADDER FOR SERVICING PURPOSES.

(Applicable for cantilever (s) for above six (6) feet and roof installation)

-I agree to the terms of conditions set her upon survey. I also agree to pay the corresponding amount for the standard installation rate, while the cost for all additional work will be paid directly to our installer team.

-Validity of quotation is only 30days upon approval.




FLOMAR D. ESCOL

ESCOOL, Representative:

Client's/Conform:

GROUND FLOOR

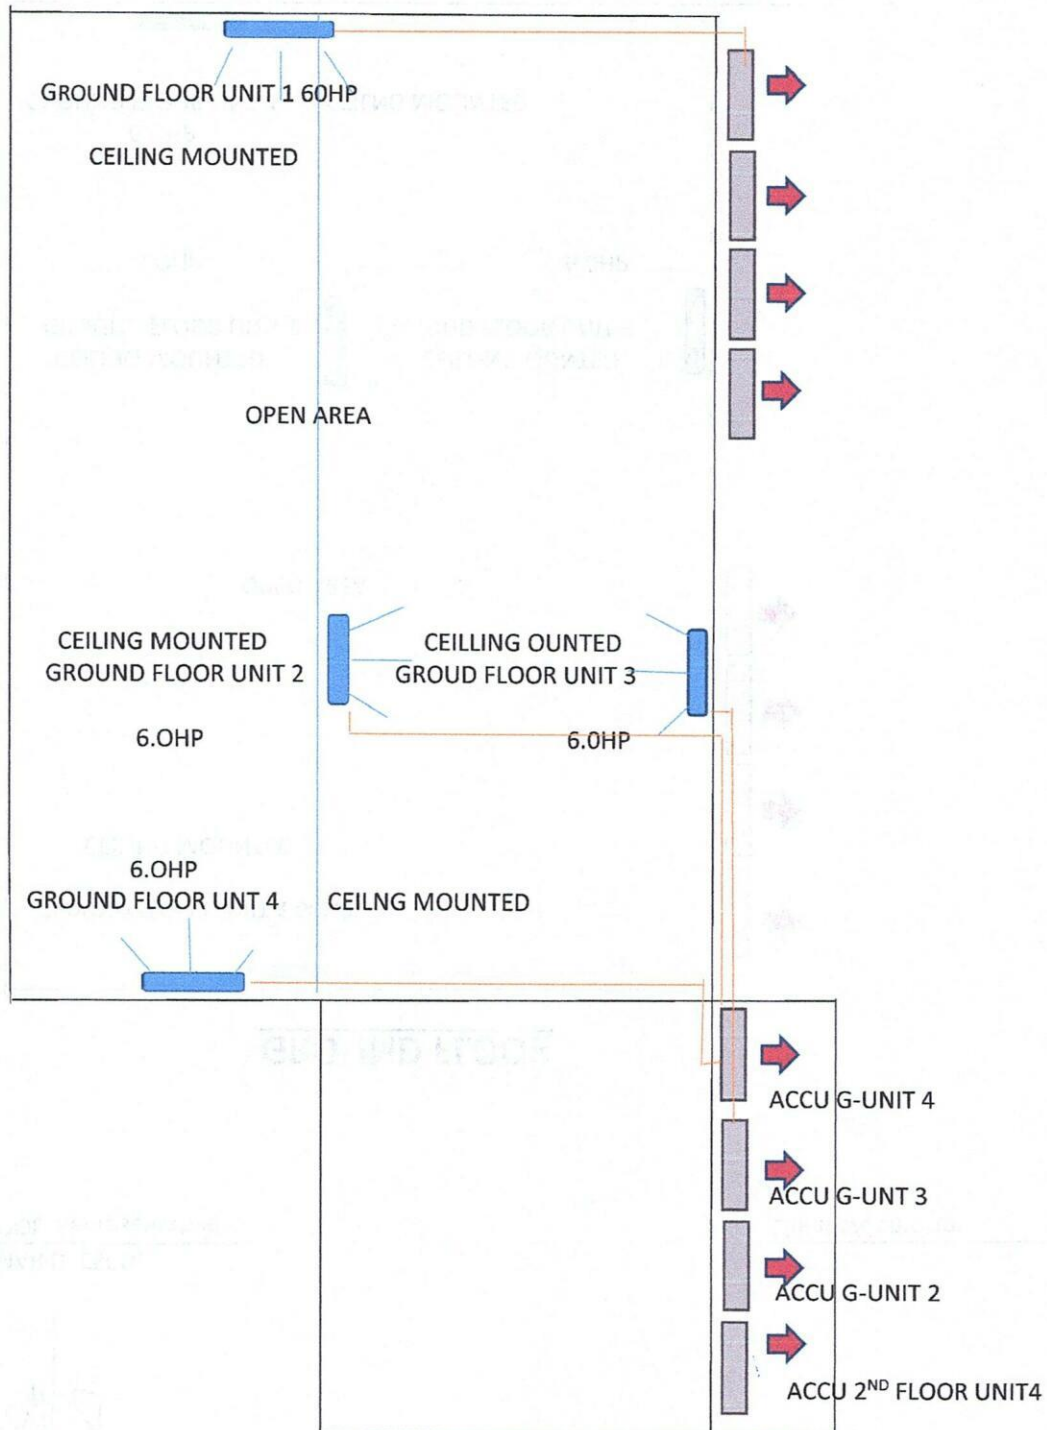

2ND FLOOR

