
October 20, 2025

DAVID ONG

Rm 60A S-Tower #1630 Jose Abad Santos St. cor Bambang St. Brgy Tondo Manila

Model	Qty		
KSG-IWF-30WFY-8K1M32	1		
KAG-145WCINV	2		

IVING	AREA					Area	≈ 3	4 sq.m
ACU 3	2.5hp Wallmounted Inverter		KSG-IWF-30WFY-8K1M32					
	Estimated Pipe Length :	27	ft					
	Estimated Royal Cord Length:	32	ft					
	Initial Charge						P	8,500.00
	Includes:							i i
	Labor							
	10ft Copper Tube							
	10ft Royal Cord							
	Outdoor Bracket (wall)							
	Other Consumable	S						
	Additional Charges	Description	Unit	Price Per Unit		Subtotal		
	Copper Tube	1/4"x 5/8"	17 ft	P 400.00 / ft	P	6,800.00		
	Royal Cord	2.mm2 x 4C	22 ft	P 100.00 / ft	P	2,200.00		
	Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P 60.00 / ft	P	300.00		
	Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P	1,000.00		
	PVC(drainline)	3/4" blue	3 pc(s)	P 150.00 / pc	Р	450.00	P_	10,750.00
	Estimated Charges						Р	19,250.0
BEDRO	OM 1					Area	≈ 1	2 sq.m
ACU2	1.5hp Windowtype Inverter		KAG-14	5WCINV				-
	Initial charge						Р	1,200.00
	Angle Bracket						P	450.00
								150.00
	Estimated charges						Р	1,650.00
BEDRO						Area	≈ 1	2.8 sq.m
ACU3	1.5hp Windowtype Inverter		KAG-14	5WCINV				
	Initial charge						Р	1,200.00
	militar charge							

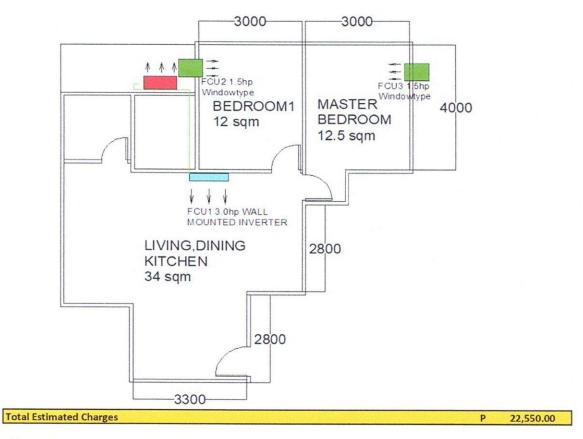

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Note:

- 1 Location of indoor and outdoor units were agreed by the customer and Kolin's surveyor.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 KAG-145WCINV Dimension: W x D x H, = 560 X 708 x 375 mm. (22 x 28 x 15 inches)
- 4 Customer need to open the grills or make a door for servicing.
- 5 Working days: Monday to Saturday, 8am-5pm without parking.
- 6 Mechanical Plans, Permits, Electrical permits not included.
- 7 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 8 Electrical power supply (feeder line) 220v/60hz/1ph, is not included in the scope of work of Kolin.
- 9 Final charges will be based on actual installation.

Prepared by:	Customer Conformee:
Jeoffrey Dadios	
Field Surveyor	Signature Over Printed Name
Reviewed by:	
Engr Kenneth Jamora	
ServiceSylpervisor	
Field and Shop Operation	