



September 15, 2025

MR. NICHOLAS CHUA
LOPEZ JAENA ST., SAN JUAN CITY

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION - 4TH FLOOR

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
14	UNIT/S	MODEL: KLM-IS60-AA1M32 KOLIN CEILING CASSETTE AIRCONDITIONER 55,503 Kj/h (5.0TR) DC INVERTER R-32 SINGLE PHASE	154,995.00	117,796.20	PHP	1,649,146.80
1	UNIT/S	MODEL: KLM-IS40-AA1M32 KOLIN CEILING CASSETTE AIRCONDITIONER 37,980 Kj/h (3.0TR) DC INVERTER R-32 SINGLE PHASE	119,995.00	91,196.20	PHP	91,196.20
TOTAL UNIT COST					PHP	1,740,343.00
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	846,025.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	2,586,368.00

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR CEILING CASSETTE (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).**

***** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

** This quotation is based on provided floor plan only. subject for actual survey once location is available.

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted By:

MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME

KMI-QUOTE-09-25-0685
REG-24%



August 27, 2025
 NICHOLAS CHUA
 Lopez Jaena St. San Juan City

MODEL	Qty
KLM-IS60-AA1M32	14
KLM-IS40-AA1M32	1

4TH FLOOR

LEASABLE 1	Area	155 sqm
-------------------	------	---------

ACU 1 6.0 HP Ceiling Cassette Inverter *KLM-IS60-AA1M32*
 Estimated Pipe Length = 30 ft
 Estimated Royal Cord Length = 37 ft
Initial Charge ₱ 15,000.00

Includes:

Labor
 10ft Copper Tube
 10ft Royal Cord
 Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8 " x Ø 5/8"	20 ft	₱ 400.00/ft	₱ 8,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	27 ft	₱ 100.00/ft	₱ 2,700.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	5 pc/s	₱ 350.00/pc	₱ 1,750.00
Rubber Insulation	1 1/8" x 3/4" x 6'	5 pc/s	₱ 230.00/pc	₱ 1,150.00
Full thread	3/8" x 10'	6 pc/s	₱ 150.00/pc	₱ 900.00
Metal Clamp	3"	8 pc/s	₱ 120.00/pc	₱ 960.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	2 pc/s	₱ 200.00/pc	₱ 400.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 24,025.00

Estimated Charges	₱ 39,025.00
--------------------------	--------------------

ACU 2 6.0 HP Ceiling Cassette Inverter *KLM-IS60-AA1M32*
 Estimated Pipe Length = 43 ft
 Estimated Royal Cord Length = 50 ft
Initial Charge ₱ 15,000.00

Includes:

Labor
 10ft Copper Tube
 10ft Royal Cord
 Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8 " x Ø 5/8"	33 ft	₱ 400.00/ft	₱ 13,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	40 ft	₱ 100.00/ft	₱ 4,000.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	6 pc/s	₱ 350.00/pc	₱ 2,100.00
Rubber Insulation	1 1/8" x 3/4" x 6'	5 pc/s	₱ 230.00/pc	₱ 1,150.00
Full thread	3/8" x 10'	6 pc/s	₱ 150.00/pc	₱ 900.00
Metal Clamp	3"	10 pc/s	₱ 120.00/pc	₱ 1,200.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	2 pc/s	₱ 200.00/pc	₱ 400.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 31,115.00

Estimated Charges	₱ 46,115.00
--------------------------	--------------------

ACU 3 6.0 HP Ceiling Cassette Inverter**KLM-IS60-AA1M32**

Estimated Pipe Length = 27 ft
 Estimated Royal Cord Length = 34 ft

Initial Charge

₱ 15,000.00

Includes:

Labor
 10ft Copper Tube
 10ft Royal Cord
 Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8 " x Ø 5/8"	17 ft	₱ 400.00/ft	₱ 6,800.00
Royal Cord (comm. wire)	2.mm2 x 4C	24 ft	₱ 100.00/ft	₱ 2,400.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	4 pc/s	₱ 350.00/pc	₱ 1,400.00
Rubber Insulation	1 1/8" x 3/4" x 6'	4 pc/s	₱ 230.00/pc	₱ 920.00
Full thread	3/8" x 10'	6 pc/s	₱ 150.00/pc	₱ 900.00
Metal Clamp	3"	8 pc/s	₱ 120.00/pc	₱ 960.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	2 pc/s	₱ 200.00/pc	₱ 400.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 21,945.00

Estimated Charges**₱ 36,945.00****ACU 4 6.0 HP Ceiling Cassette Inverter****KLM-IS60-AA1M32**

Estimated Pipe Length = 40 ft
 Estimated Royal Cord Length = 47 ft

Initial Charge

₱ 15,000.00

Includes:

Labor
 10ft Copper Tube
 10ft Royal Cord
 Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8 " x Ø 5/8"	30 ft	₱ 400.00/ft	₱ 12,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	37 ft	₱ 100.00/ft	₱ 3,700.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	6 pc/s	₱ 350.00/pc	₱ 2,100.00
Rubber Insulation	1 1/8" x 3/4" x 6'	5 pc/s	₱ 230.00/pc	₱ 1,150.00
Full thread	3/8" x 10'	6 pc/s	₱ 150.00/pc	₱ 900.00
Metal Clamp	3"	10 pc/s	₱ 120.00/pc	₱ 1,200.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	2 pc/s	₱ 200.00/pc	₱ 400.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 29,615.00

Estimated Charges**₱ 44,615.00**

LEASABLE -2

Area 152 sqm

ACU 5 6.0 HP Ceiling Cassette Inverter**KLM-IS60-AA1M32**

Estimated Pipe Length = 60 ft

Estimated Royal Cord Length = 67 ft

Initial Charge

₱ 15,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	50 ft	₱ 400.00/ft	₱ 20,000.00
Royal Cord (comm. wire)	57 ft	₱ 100.00/ft	₱ 5,700.00
Royal Cord (ACCU-Breaker)	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	9 pc/s	₱ 350.00/pc	₱ 3,150.00
Rubber Insulation	5 pc/s	₱ 230.00/pc	₱ 1,150.00
Full thread	6 pc/s	₱ 150.00/pc	₱ 900.00
Metal Clamp	13 pc/s	₱ 120.00/pc	₱ 1,560.00
Indoor bracket	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	2 pc/s	₱ 200.00/pc	₱ 400.00
Drain Hose	7 ft	₱ 25.00/ft	₱ 175.00
			₱ 41,025.00

Estimated Charges

₱ 56,025.00

ACU 6 6.0 HP Ceiling Cassette Inverter**KLM-IS60-AA1M32**

Estimated Pipe Length = 73 ft

Estimated Royal Cord Length = 80 ft

Initial Charge

₱ 15,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	63 ft	₱ 400.00/ft	₱ 25,200.00
Royal Cord (comm. wire)	70 ft	₱ 100.00/ft	₱ 7,000.00
Royal Cord (ACCU-Breaker)	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	9 pc/s	₱ 350.00/pc	₱ 3,150.00
Rubber Insulation	5 pc/s	₱ 230.00/pc	₱ 1,150.00
Full thread	6 pc/s	₱ 150.00/pc	₱ 900.00
Metal Clamp	13 pc/s	₱ 120.00/pc	₱ 1,560.00
Indoor bracket	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	2 pc/s	₱ 200.00/pc	₱ 400.00
Drain Hose	7 ft	₱ 25.00/ft	₱ 175.00
			₱ 47,525.00

Estimated Charges

₱ 62,525.00

ACU 7 6.0 HP Ceiling Cassette Inverter**KLM-IS60-AA1M32**

Estimated Pipe Length = 63 ft
 Estimated Royal Cord Length = 70 ft

Initial Charge

₱ 15,000.00

Includes:

Labor
 10ft Copper Tube
 10ft Royal Cord
 Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8 " x Ø 5/8"	53 ft	₱ 400.00/ft	₱ 21,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	60 ft	₱ 100.00/ft	₱ 6,000.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	9 pc/s	₱ 350.00/pc	₱ 3,150.00
Rubber Insulation	1 1/8" x 3/4" x 6'	9 pc/s	₱ 230.00/pc	₱ 2,070.00
Full thread	3/8" x 10'	6 pc/s	₱ 150.00/pc	₱ 900.00
Metal Clamp	3"	13 pc/s	₱ 120.00/pc	₱ 1,560.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	3 pc/s	₱ 200.00/pc	₱ 600.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 43,645.00

Estimated Charges

₱ 58,645.00

ACU 8 6.0 HP Ceiling Cassette Inverter**KLM-IS60-AA1M32**

Estimated Pipe Length = 76 ft
 Estimated Royal Cord Length = 83 ft

Initial Charge

₱ 15,000.00

Includes:

Labor
 10ft Copper Tube
 10ft Royal Cord
 Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8 " x Ø 5/8"	66 ft	₱ 400.00/ft	₱ 26,400.00
Royal Cord (comm. wire)	2.mm2 x 4C	73 ft	₱ 100.00/ft	₱ 7,300.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	10 pc/s	₱ 350.00/pc	₱ 3,500.00
Rubber Insulation	1 1/8" x 3/4" x 6'	10 pc/s	₱ 230.00/pc	₱ 2,300.00
Full thread	3/8" x 10'	6 pc/s	₱ 150.00/pc	₱ 900.00
Metal Clamp	3"	14 pc/s	₱ 120.00/pc	₱ 1,680.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	2 pc/s	₱ 200.00/pc	₱ 400.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 50,645.00

Estimated Charges

₱ 65,645.00

LEASABLE-3	Area	97 sqm
-------------------	-------------	---------------

ACU 9 6.0 HP Ceiling Cassette Inverter **KLM-IS40-AA1M32**
 Estimated Pipe Length = 69 ft
 Estimated Royal Cord Length = 76 ft
Initial Charge ₱ 12,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8 " x Ø 5/8"	59 ft	₱ 400.00/ft	₱ 23,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	66 ft	₱ 100.00/ft	₱ 6,600.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	9 pc/s	₱ 350.00/pc	₱ 3,150.00
Rubber Insulation	1 1/8" x 3/4" x 6'	9 pc/s	₱ 230.00/pc	₱ 2,070.00
Full thread	3/8" x 10'	6 pc/s	₱ 150.00/pc	₱ 900.00
Metal Clamp	3"	12 pc/s	₱ 120.00/pc	₱ 1,440.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	2 pc/s	₱ 200.00/pc	₱ 400.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 46,325.00

Estimated Charges	₱ 58,325.00
--------------------------	--------------------

ACU 10 4.0 HP Ceiling Cassette Inverter **KLM-IS60-AA1M32**
 Estimated Pipe Length = 79 ft
 Estimated Royal Cord Length = 86 ft
Initial Charge ₱ 15,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8 " x Ø 5/8"	69 ft	₱ 400.00/ft	₱ 27,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	76 ft	₱ 100.00/ft	₱ 7,600.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	10 pc/s	₱ 350.00/pc	₱ 3,500.00
Rubber Insulation	1 1/8" x 3/4" x 6'	10 pc/s	₱ 230.00/pc	₱ 2,300.00
Full thread	3/8" x 10'	6 pc/s	₱ 150.00/pc	₱ 900.00
Metal Clamp	3"	15 pc/s	₱ 120.00/pc	₱ 1,800.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	4 pc/s	₱ 200.00/pc	₱ 800.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 52,665.00

Estimated Charges	₱ 67,665.00
--------------------------	--------------------

ACU 11 4.0 HP Ceiling Cassette Inverter**KLM-IS60-AA1M32**

Estimated Pipe Length = 79 ft

Estimated Royal Cord Length = 86 ft

Initial Charge

₱ 15,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8 " x Ø 5/8"	69 ft	₱ 400.00/ft	₱ 27,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	76 ft	₱ 100.00/ft	₱ 7,600.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	10 pc/s	₱ 350.00/pc	₱ 3,500.00
Rubber Insulation	1 1/8" x 3/4" x 6'	10 pc/s	₱ 230.00/pc	₱ 2,300.00
Full thread	3/8" x 10'	6 pc/s	₱ 150.00/pc	₱ 900.00
Metal Clamp	3"	15 pc/s	₱ 120.00/pc	₱ 1,800.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	4 pc/s	₱ 200.00/pc	₱ 800.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 52,665.00

Estimated Charges

₱ 67,665.00

LEASABLE-4

Area 185 sqm

ACU 12 6.0 HP Ceiling Cassette Inverter**KLM-IS60-AA1M32**

Estimated Pipe Length = 47 ft

Estimated Royal Cord Length = 54 ft

Initial Charge

₱ 15,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8 " x Ø 5/8"	37 ft	₱ 400.00/ft	₱ 14,800.00
Royal Cord (comm. wire)	2.mm2 x 4C	44 ft	₱ 100.00/ft	₱ 4,400.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	7 pc/s	₱ 350.00/pc	₱ 2,450.00
Rubber Insulation	1 1/8" x 3/4" x 6'	6 pc/s	₱ 230.00/pc	₱ 1,380.00
Full thread	3/8" x 10'	6 pc/s	₱ 150.00/pc	₱ 900.00
Metal Clamp	3"	10 pc/s	₱ 120.00/pc	₱ 1,200.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	4 pc/s	₱ 200.00/pc	₱ 800.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 34,095.00

Estimated Charges

₱ 49,095.00

ACU 13 6.0 HP Ceiling Cassette Inverter**KLM-IS60-AA1M32**

Estimated Pipe Length = 60 ft
 Estimated Royal Cord Length = 67 ft

Initial Charge

₱ 15,000.00

Includes:**Labor**

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8 " x Ø 5/8"	50 ft	₱ 400.00/ft	₱ 20,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	57 ft	₱ 100.00/ft	₱ 5,700.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	9 pc/s	₱ 350.00/pc	₱ 3,150.00
Rubber Insulation	1 1/8" x 3/4" x 6'	9 pc/s	₱ 230.00/pc	₱ 2,070.00
Full thread	3/8" x 10'	6 pc/s	₱ 150.00/pc	₱ 900.00
Metal Clamp	3"	13 pc/s	₱ 120.00/pc	₱ 1,560.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	4 pc/s	₱ 200.00/pc	₱ 800.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 42,345.00

Estimated Charges**₱ 57,345.00****ACU 14 6.0 HP Ceiling Cassette Inverter****KLM-IS60-AA1M32**

Estimated Pipe Length = 69 ft
 Estimated Royal Cord Length = 76 ft

Initial Charge

₱ 15,000.00

Includes:**Labor**

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8 " x Ø 5/8"	59 ft	₱ 400.00/ft	₱ 23,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	66 ft	₱ 100.00/ft	₱ 6,600.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	9 pc/s	₱ 350.00/pc	₱ 3,150.00
Rubber Insulation	1 1/8" x 3/4" x 6'	9 pc/s	₱ 230.00/pc	₱ 2,070.00
Full thread	3/8" x 10'	6 pc/s	₱ 150.00/pc	₱ 900.00
Metal Clamp	3"	13 pc/s	₱ 120.00/pc	₱ 1,560.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	5 pc/s	₱ 200.00/pc	₱ 1,000.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 47,045.00

Estimated Charges**₱ 62,045.00**

ACU 15 6.0 HP Ceiling Cassette Inverter**KLM-IS60-AA1M32**

Estimated Pipe Length = 89 ft
Estimated Royal Cord Length = 96 ft

Initial Charge

₱ 15,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8 " x Ø 5/8"	79 ft	₱ 400.00/ft	₱ 31,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	86 ft	₱ 100.00/ft	₱ 8,600.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	40A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	12 pc/s	₱ 350.00/pc	₱ 4,200.00
Rubber Insulation	1 1/8" x 3/4" x 6'	12 pc/s	₱ 230.00/pc	₱ 2,760.00
Full thread	3/8" x 10'	6 pc/s	₱ 150.00/pc	₱ 900.00
Metal Clamp	3"	16 pc/s	₱ 120.00/pc	₱ 1,920.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	6 pc/s	₱ 200.00/pc	₱ 1,200.00
Drain Hose	White -1/2"	7 ft	₱ 25.00/ft	₱ 175.00
				₱ 59,345.00

Estimated Charges	₱ 74,345.00
--------------------------	--------------------


Total Estimated Charges	₱ 846,025.00
--------------------------------	---------------------

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location based in floor plan only.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for marking and site visit before installation.
- 4 Working days: Monday to Saturday, 8am- 5pm with parking. Need working permit.
- 5 Mechanical Plans, Permits, Electrical permits not included.
- 6 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 7 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph** , should be provided by customer's contractor.
- 8 **Final charges will be based on actual installation.**

Prepared by:



Jeffrey Dadios

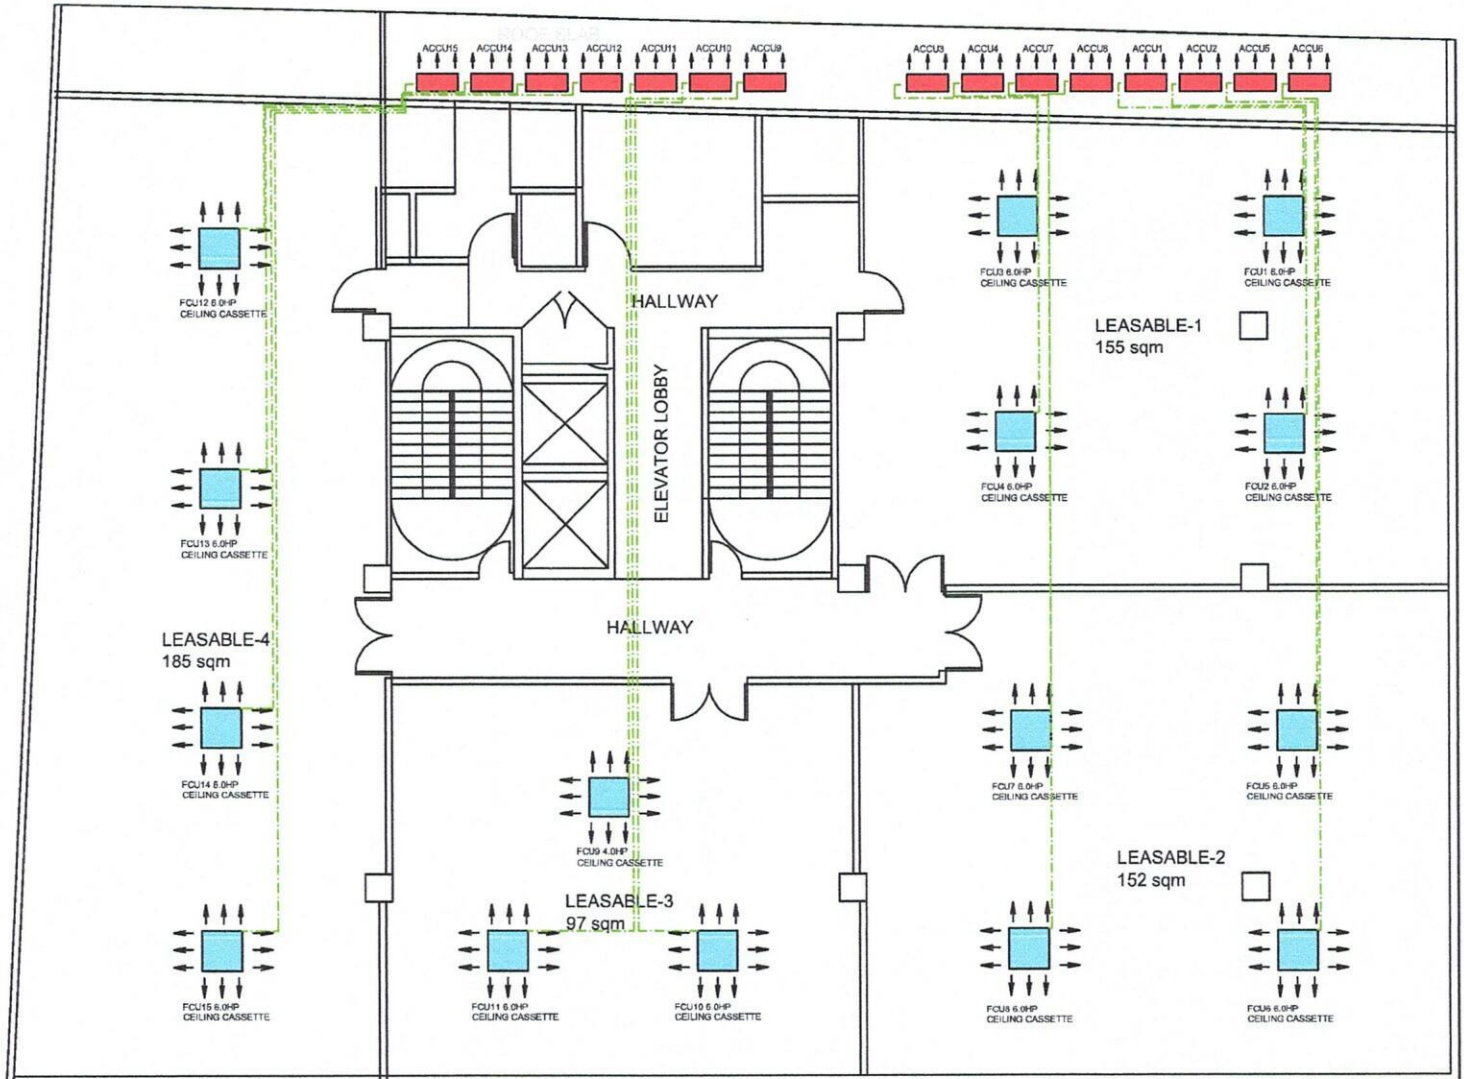
Field Surveyor

Customer Conformance:

Signature Over Printed Name

Reviewed by:


Engr. Kenneth ZamoraService Supervisor Shop and
Field Operation



4TH FLOOR PLAN