

SPEEDEDGE
ALABANG WEST, WEST RD. DAANGHARI ROAD, LAS PIÑAS CITY
ATTN: MS. ARLENE IGNACIO
TEL#: 0936-9027204 / 0916-4700741

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
5	UNIT/S	MODEL: KLG-IF40-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 37,980 KJ/h (3.0TR) FULL DC INVERTER R-32 SINGLE PHASE	113,195.00	79,028.20	PHP	395,141.00
4	UNIT/S	MODEL: KLM-IC40-AA1M32 KOLIN FLOOR/CEILING AIRCONDITIONER 37,980 KJ/h (3.0TR) DC INVERTER R-32	117,995.00	89,676.20	PHP	358,704.80
1	UNIT/S	MODEL: KVM-50VAH1M-O KOLIN VERSAMATCH SERIES AIRCONDITIONER 47,475 kJ/h (5.0HP) OUTDOOR UNIT INVERTER R32	109,995.00	83,596.20	PHP	83,596.20
2	UNIT/S	MODEL: KVM-40VAH1M-O KOLIN VERSAMATCH SERIES AIRCONDITIONER 37,980 kJ/h (4.0HP) OUTDOOR UNIT INVERTER R32	79,995.00	60,796.20	PHP	121,592.40
4	UNIT/S	MODEL: KSG-IWF-30WYF-8KIM32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 KJ/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	51,212.20	PHP	204,848.80
1	UNIT/S	MODEL: KSG-IWF-25WYF-8KIM32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 KJ/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	45,436.20	PHP	45,436.20
1	UNIT/S	MODEL: KSG-IWF-10WYF-8KIM32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 11,484 KJ/h (1.0HP) FULL DC INVERTER W/ WIFI R-32	42,595.00	25,372.20	PHP	25,372.20
1	UNIT/S	MODEL: KVM-25IWAH-I KOLIN VERSAMATCH SERIES AIRCONDITIONER INVERTER 23,210 kJ/h (2.5HP) WALL MOUNTED INDOOR UNIT R32	19,995.00	15,196.20	PHP	15,196.20
4	UNIT/S	MODEL: KVM-20IWAH-I KOLIN VERSAMATCH SERIES AIRCONDITIONER INVERTER 18,990 kJ/h (2.0HP) WALL MOUNTED INDOOR UNIT R32	15,995.00	12,156.20	PHP	48,624.80
1	UNIT/S	MODEL: KVM-15IWAH-I KOLIN VERSAMATCH SERIES AIRCONDITIONER INVERTER 12,660 kJ/h (1.5HP) WALL MOUNTED INDOOR UNIT R32	12,995.00	9,876.20	PHP	9,876.20
1	UNIT/S	MODEL: KVM-10IWAH-I KOLIN VERSAMATCH SERIES AIRCONDITIONER INVERTER 9,495 kJ/h (1.0HP) WALL MOUNTED INDOOR UNIT R32	10,995.00	8,356.20	PHP	8,356.20
TOTAL UNIT COST					PHP	1,316,745.00
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	966,795.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	2,283,540.00

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.
FOR FLOOR/CEILING: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.
FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB, TEN (10) YEARS WARRANTY ON COMPRESSOR.
FOR VERSAMATCH: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).

*** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

** This quotation is based on provided floor plan only, subject for actual survey once location is available.

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted By:

MAKATI JANELLEN S. FLORES
KMI-SUPERVISOR

KMI-QUOTE-09-25-0694
REG-24%/7K

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

Conforme:

SIGNATURE OVER PRINTED NAME



SEPTEMBER 13, 2025

SPEEDEDGE

Alabang West, West Rd. DaangHari Road, Las Pinas City

[0936-9027204](tel:0936-9027204) / [0916-4700741](tel:0916-4700741)

MODEL	QUANTITY
KLG-IF40-5G1M32	5
KLM-IC40-AA1M32-I	4
KVM-50VAH1M-O	1
KVM-40VAH1M-O	2
KSG-IWF-30Wfy8K1M32	4
KSG-IWF-25Wfy8K1M32	1
KSG-IWF-10Wfy8K1M32	1
KVM-25IWAH-I	1
KVM-20IWAH-I	4
KVM-15IWAH-I	1
KVM-10IWAH-I	1

CUSTOMER SHOWROOM	Area ≈ 206 sq.m
--------------------------	-----------------

ACU 1 4.0hp Floor mounted Inverter

KLG-IF40-5G1M32

Estimated Pipe Length : 60 ft
Estimated Royal Cord Length : 67 ft

Initial Charge

P 11,000.00

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Indoor Bracket
Other Consumables

Additional Charges	Description	Unit	Price per Unit	Subtotal
Copper Tube	3/8"x 5/8"	50 ft	P 400.00 / ft	P 20,000.00
Royal Cord	2.mm2 x 4C	57 ft	100.00 / ft	5,700.00
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft	70.00 / ft	490.00
Circuit Breaker(NEMA)	40A/ 1Ph	1 pc(s)	1,000.00 / pc	1,000.00
Outdoor Bracket(WALL)	fabricated	1 pc(s)	5,000.00 / pc	5,000.00
Rubber Insulation	2 1/8"x3/4" x 6'	8 pc(s)	350.00 / pc	2,800.00
Full Thread	3 meters	2 pc(s)	150.00 / pc	300.00
Pipe hanger	3 inches	12 pc(s)	120.00 / pc	1,440.00
PVC(Drainline)	3/4 inch- blue	2 pc(s)	P 150.00 / pc	P 300.00
				P 37,030.00

Estimated Charges	P 48,030.00
--------------------------	--------------------

ACU 2 4.0hp Floor mounted Inverter**KLG-IF40-5G1M32**

Estimated Pipe Length : 66 ft

Estimated Royal Cord Length : 73 ft

Initial Charge

P 11,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket

Other Consumables

Additional Charges	Description	Unit	Price per Unit	Subtotal
Copper Tube	3/8"x 5/8"	56 ft	P 400.00 / ft	P 22,400.00
Royal Cord	2.mm2 x 4C	63 ft	100.00 / ft	6,300.00
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	5 ft	70.00 / ft	350.00
Circuit Breaker(NEMA)	40A/ 1Ph	1 pc(s)	1,000.00 / pc	1,000.00
Outdoor Bracket(WALL)	fabricated	1 pc(s)	5,000.00 / pc	5,000.00
Rubber Insulation	2 1/8"x3/4" x 6'	8 pc(s)	350.00 / pc	2,800.00
Full Thread	3 meters	2 pc(s)	150.00 / pc	300.00
Pipe hanger	3 inches	12 pc(s)	120.00 / pc	1,440.00
PVC(Drainline)	3/4 inch- blue	2 pc(s)	P 150.00 / pc	P 300.00
				P 39,890.00

Estimated Charges	P 50,890.00
--------------------------	--------------------

ACU 3 4.0hp Floor mounted Inverter**KLG-IF40-5G1M32**

Estimated Pipe Length : 86 ft

Estimated Royal Cord Length : 93 ft

Initial Charge

P 11,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket

Other Consumables

Additional Charges	Description	Unit	Price per Unit	Subtotal
Copper Tube	3/8"x 5/8"	76 ft	P 400.00 / ft	P 30,400.00
Royal Cord	2.mm2 x 4C	83 ft	100.00 / ft	8,300.00
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	7 ft	70.00 / ft	490.00
Circuit Breaker(NEMA)	40A/ 1Ph	1 pc(s)	1,000.00 / pc	1,000.00
Rubber Insulation	2 1/8"x3/4" x 6'	10 pc(s)	350.00 / pc	3,500.00
Full Thread	3 meters	2 pc(s)	150.00 / pc	300.00
Pipe hanger	3 inches	16 pc(s)	120.00 / pc	1,920.00
PVC(drainline)	3/4- blue	3 pc(s)	150.00 / pc	450.00
Outdoor Bracket(wall)	fabricated	1 pc(s)	P 5,000.00 / pc	P 5,000.00
				P 51,360.00

Estimated Charges	P 62,360.00
--------------------------	--------------------

VIP SHOWROOM/ RELOAD AREA**ACCU 4 4.0hp Flexmatch Inverter****KVM-40WAH1M-O**

Additional Charges	Description	Unit	Price per Unit	Subtotal
Circuit Breaker(NEMA)	40A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Royal Cord (ODU-Breaker)	5.5mm ² x 3C	5 ft	70.00 / ft	350.00
Outdoor Bracket(fabricated)	Wall	1 unit	P 5000.00 / unit	P 5000.00
				P 6,350.00

VIP SHOWROOM**Area ≈ 12 sq.m****FCU4A 1.5hp Wall Mounted Inverter****KVM-15IWAH-I**

Estimated Pipe Length : 46 ft
 Estimated Royal Cord Length : 53 ft

Initial Charge**P 8,500.00**

Includes:

Labor
 10ft Copper Tube
 10ft Royal Cord
 Other Consumables

Additional Charges	Description	Unit	Price per Unit	Subtotal
Coppertube	1/4" x 1/2"	37 ft	P 350.00 / ft	P 12950.00
Royal Cord	2mm ² x 4C	42 ft	100.00 / ft	4200.00
Drain Hose	White -1/2"	5 ft	25.00 / ft	125.00
Rubber Insulation	2 1/8x 3/4x 6'	6 pc(s)	350.00 / pc	2100.00
Full thread	3 meters	2 pc(s)	150.00 / pc	300.00
Pipe Hanger	3 inches	9 pc(s)	120.00 / pc	1080.00
PVC Pipe (Drain)	3/4- blue	2 pc(s)	P 150.00 / ft	P 300.00
				P 21,055.00

RELOAD AREA**Area ≈ 24.5 sq.m****FCU4B 2.5hp Wall Mounted Inverter****KVM-25IWAH-I**

Estimated Pipe Length : 46 ft
 Estimated Royal Cord Length : 53 ft

Initial Charge**P 8,500.00**

Includes:

Labor
 10ft Copper Tube
 10ft Royal Cord
 Other Consumables

Additional Charges	Description	Unit	Price per Unit	Subtotal
Coppertube	1/4" x 5/8"	36 ft	P 400.00 / ft	P 14400.00
Royal Cord	2mm ² x 4C	43 ft	100.00 / ft	4300.00
Drain Hose	White -1/2"	5 ft	25.00 / ft	125.00
Rubber Insulation	2 1/8x 3/4x 6'	6 pc(s)	350.00 / pc	2100.00
Full thread	3 meters	2 pc(s)	150.00 / pc	300.00
Pipe Hanger	3 inches	8 pc(s)	120.00 / pc	960.00
PVC Pipe (Drain)	3/4- blue	1 pc(s)	P 150.00 / ft	P 150.00
				22,335.00

Estimated Charges for ACU4**P 66,740.00**

GUNSMITH					Area ≈ 31 sq.m	
ACU 5	3.0hp Wallmounted Inverter		KSG-IWF-30Wfy-8K1M32			
	Estimated Pipe Length :	76	ft			
	Estimated Royal Cord Length :	81	ft			
	Initial Charge				P	8,500.00
	Includes:					
	Labor					
	10ft Copper Tube					
	10ft Royal Cord					
	Outdoor Bracket (wall)					
	Other Consumables					
	Additional Charges	Description	Unit	Price Per Unit	Subtotal	
	Copper Tube	1/4"x 5/8"	66 ft	P 400.00 / ft	P 26,400.00	
	Royal Cord	2.mm2 x 4C	71 ft	100.00 / ft	7,100.00	
	Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	60.00 / ft	300.00	
	Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	1,000.00 / pc	1,000.00	
	Rubber Insulation	2 1/8"x3/4" x 6'	10 pc(s)	350.00 / pc	3,500.00	
	Full Thread	3 meters	2 pc(s)	150.00 / pc	300.00	
	Pipe hanger	3 inches	14 pc(s)	P 120.00 / pc	P 1,680.00	P 40,280.00
Estimated Charges					P	48,780.00

MANAGER					Area ≈ 14 sq.m	
ACU 6	2.5hp Wallmounted Inverter		KSG-IWF-25Wfy-8K1M32			
	Estimated Pipe Length :	76	ft			
	Estimated Royal Cord Length :	81	ft			
	Initial Charge				P	8,500.00
	Includes:					
	Labor					
	10ft Copper Tube					
	10ft Royal Cord					
	Outdoor Bracket (wall)					
	Other Consumables					
	Additional Charges	Description	Unit	Price Per Unit	Subtotal	
	Copper Tube	1/4"x 5/8"	66 ft	P 400.00 / ft	P 26,400.00	
	Royal Cord	2.mm2 x 4C	71 ft	100.00 / ft	7,100.00	
	Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	60.00 / ft	300.00	
	Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	1,000.00 / pc	1,000.00	
	Rubber Insulation	2 1/8"x3/4" x 6'	10 pc(s)	350.00 / pc	3,500.00	
	Full Thread	3 meters	2 pc(s)	150.00 / pc	300.00	
	Pipe hanger	3 inches	14 pc(s)	P 120.00 / pc	P 1,680.00	P 40,280.00
Estimated Charges					P	48,780.00

WORK BENCH

Area ≈ 34.5 sq.m

ACU 7 4.0hp Floor Ceiling Inverter**KLM-IC40-AA1M32**

Estimated Pipe Length : 72 ft

Estimated Royal Cord Length : 79 ft

Initial Charge

P 12,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	3/8"x 5/8"	62 ft	P 400.00 / ft	P 24,800.00
Royal Cord	2.mm2 x 4C	69 ft	P 100.00 / ft	P 6,900.00
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	5 ft	P 70.00 / ft	P 350.00
Circuit Breaker(NEMA)	40A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Rubber Insulation	2 1/8"x3/4" x 6'	10 pc(s)	P 350.00 / pc	P 3,500.00
Full Thread	3 meters	2 pc(s)	P 150.00 / pc	P 300.00
Pipe hanger	3 inches	14 pc(s)	P 120.00 / pc	P 1,680.00
Outdoor Bracket(WALL)	fabricated	1 pc(s)	P 5,000.00 / pc	P 5,000.00
				P 43,530.00

Estimated Charges**P 55,530.00****ACU 8 4.0hp Floor Ceiling Inverter****KLM-IC40-AA1M32**

Estimated Pipe Length : 83 ft

Estimated Royal Cord Length : 90 ft

Initial Charge

P 12,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Full thread (indoor mounting)

Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	3/8"x 5/8"	73 ft	P 400.00 / ft	P 29,200.00
Royal Cord	2.mm2 x 4C	80 ft	P 100.00 / ft	P 8,000.00
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	5 ft	P 70.00 / ft	P 350.00
Circuit Breaker(NEMA)	40A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Rubber Insulation	2 1/8"x3/4" x 6'	12 pc(s)	P 350.00 / pc	P 4,200.00
Full Thread	3 meters	2 pc(s)	P 150.00 / pc	P 300.00
Pipe hanger	3 inches	15 pc(s)	P 120.00 / pc	P 1,800.00
Outdoor Bracket(WALL)	fabricated	1 pc(s)	P 5,000.00 / pc	P 5,000.00
				P 49,850.00

Estimated Charges**P 61,850.00**

GUARD, SALES & ACCOUNTING**ACCU 9 5.0hp Flexmatch Inverter****KVM-50WAH1M-O**

Additional Charges	Description	Unit	Price per Unit	Subtotal
Circuit Breaker(NEMA)	40A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Royal Cord (ODU-Breaker)	5.5mm ² x 3C	5 ft	P 50.00 / ft	P 250.00
Outdoor Bracket(fabricated)	Wall	1 unit	P 5,000.00 / unit	P 5,000.00
				P 6,250.00

GUARD**Area ≈ 7.4 sq.m****FCU9A 1.0hp Wall Mounted Inverter****KVM-10IWAH-I**

Estimated Pipe Length :	86	ft
Estimated Royal Cord Length :	93	ft

Initial Charge**P 8,500.00**

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Other Consumables

Additional Charges	Description	Unit	Price per Unit	Subtotal
Coppertube	1/4" x 1/2"	76 ft	P 350.00 / ft	P 26,600.00
Royal Cord	2mm ² x 4C	83 ft	P 100.00 / ft	P 8,300.00
Drain Hose	White -1/2"	5 ft	P 25.00 / ft	P 125.00
Rubber Insulation	2 1/8x 3/4x 6'	11 pc(s)	P 350.00 / pc	P 3,850.00
Full thread	3 meters	2 pc(s)	P 150.00 / pc	P 300.00
Pipe Hanger	3 inches	15 pc(s)	P 120.00 / pc	P 1,800.00
PVC Pipe (Drain)	3/4- blue	1 pc(s)	P 150.00 / ft	P 150.00
				P 41,125.00

SALES & ACCOUNTING**Area ≈ 32 sq.m****FCU9B 2.0hp Wall Mounted Inverter****KVM-20IWAH-I**

Estimated Pipe Length :	72	ft
Estimated Royal Cord Length :	79	ft

Initial Charge**P 8,500.00**

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Other Consumables

Additional Charges	Description	Unit	Price per Unit	Subtotal
Coppertube	1/4" x 5/8"	62 ft	P 400.00 / ft	P 24,800.00
Royal Cord	2mm ² x 4C	69 ft	P 100.00 / ft	P 6,900.00
Drain Hose	White -1/2"	7 ft	P 25.00 / ft	P 175.00
Rubber Insulation	2 1/8x 3/4x 6'	10 pc(s)	P 350.00 / pc	P 3,500.00
Full thread	3 meters	2 pc(s)	P 150.00 / pc	P 300.00
Pipe Hanger	3 inches	14 pc(s)	P 120.00 / pc	P 1,680.00
PVC Pipe (Drain)	3/4- blue	1 pc(s)	P 150.00 / ft	P 150.00
				P 37,505.00

FCU9C 2.0hp Wall Mounted Inverter**KVM-20IWAH-I**

Estimated Pipe Length : 78 ft
Estimated Royal Cord Length : 83 ft

Initial Charge**P 8,500.00****Includes:**

Labor
10ft Copper Tube
10ft Royal Cord
Other Consumables

Additional Charges	Description	Unit	Price per Unit	Subtotal
Coppertube	1/4" x 5/8"	68 ft	P 400.00 / ft	P 27200.00
Royal Cord	2mm ² x 4C	73 ft	P 100.00 / ft	P 7300.00
Drain Hose	White -1/2"	5 ft	P 25.00 / ft	P 125.00
Rubber Insulation	2 1/8x 3/4x 6'	10 pc(s)	P 350.00 / pc	P 3500.00
Full thread	3 meters	2 pc(s)	P 150.00 / pc	P 300.00
Pipe Hanger	3 inches	14 pc(s)	P 120.00 / pc	P 1680.00
PVC Pipe (Drain)	3/4- blue	1 pc(s)	P 150.00 / ft	P 150.00
				P 40,255.00

Estimated Charges for ACU9**P 150,635.00****PANTRY****Area ≈ 31 sq.m****ACU 10 3.0hp Wallmounted Inverter****KSG-IWF-30Wfy-8K1M32**

Estimated Pipe Length : 78 ft
Estimated Royal Cord Length : 83 ft

Initial Charge**P 8,500.00****Includes:**

Labor
10ft Copper Tube
10ft Royal Cord
Outdoor Bracket (wall)
Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	1/4"x 5/8"	68 ft	P 400.00 / ft	P 27,200.00
Royal Cord	2.mm2 x 4C	73 ft	P 100.00 / ft	P 7,300.00
Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P 60.00 / ft	P 300.00
Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Rubber Insulation	2 1/8"x3/4" x 6'	10 pc(s)	P 350.00 / pc	P 3,500.00
Full Thread	3 meters	2 pc(s)	P 150.00 / pc	P 300.00
Pipe hanger	3 inches	14 pc(s)	P 120.00 / pc	P 1,680.00
				P 41,280.00

Estimated Charges**P 49,780.00**

STAIRS

Area ≈ 56 sq.m

ACU 11 4.0hp Floor Ceiling Inverter**KLM-IC40-AA1M32**

Estimated Pipe Length : 63 ft

Estimated Royal Cord Length : 70 ft

Initial Charge

P 12,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor mounte (full thread)

Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	3/8"x 5/8"	53 ft	P 400.00 / ft	P 21,200.00
Royal Cord	2.mm2 x 4C	60 ft	P 100.00 / ft	P 6,000.00
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	5 ft	P 70.00 / ft	P 350.00
Circuit Breaker(NEMA)	40A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Rubber Insulation	2 1/8"x3/4" x 6'	8 pc(s)	P 350.00 / pc	P 2,800.00
Full Thread	3 meters	2 pc(s)	P 150.00 / pc	P 300.00
Pipe hanger	3 inches	12 pc(s)	P 120.00 / pc	P 1,440.00
Outdoor Bracket(WALL)	fabricated	1 pc(s)	P 5,000.00 / pc	P 5,000.00
Drain Hose	White -1/2"	5 ft	P 25.00 / ft	P 125.00
				P 38,215.00

Estimated Charges**P 50,215.00****ACU 12 4.0hp Floor Ceiling Inverter****KLM-IC40-AA1M32**

Estimated Pipe Length : 50 ft

Estimated Royal Cord Length : 57 ft

Initial Charge

P 12,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Full Thread (indoor mount)

Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	3/8"x 5/8"	40 ft	P 400.00 / ft	P 16,000.00
Royal Cord	2.mm2 x 4C	47 ft	P 100.00 / ft	P 4,700.00
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	5 ft	P 70.00 / ft	P 350.00
Circuit Breaker(NEMA)	40A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Rubber Insulation	2 1/8"x3/4" x 6'	7 pc(s)	P 350.00 / pc	P 2,450.00
Full Thread	3 meters	2 pc(s)	P 150.00 / pc	P 300.00
Pipe hanger	3 inches	10 pc(s)	P 120.00 / pc	P 1,200.00
Outdoor Bracket(WALL)	fabricated	1 pc(s)	P 5,000.00 / pc	P 5,000.00
Drain Hose	White -1/2"	7 ft	P 25.00 / ft	P 175.00
				P 31,175.00

Estimated Charges**P 43,175.00**

FIRING LANE**ACCU 13 4.0hp Versamatch Inverter****KVM-40WAH1M-Q**

Additional Charges	Description	Unit	Price per Unit	Subtotal
Circuit Breaker(NEMA)	40A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Royal Cord (ODU-Breaker)	5.5mm ² x 3C	5 ft	P 70.00 / ft	P 350.00
Outdoor Bracket(fabricated)	Wall	1 unit	P 5,000.00 / unit	P 5,000.00 P 6,350.00

FIRING LANE**Area ≈ 0 sq.m****FCU13A 2.0hp Wall Mounted Inverter****KVM-20IWAH-I**

Estimated Pipe Length :	46	ft
Estimated Royal Cord Length :	51	ft

Initial Charge**P 8,500.00**

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Other Consumables

Additional Charges	Description	Unit	Price per Unit	Subtotal
Coppertube	1/4" x 1/2"	36 ft	P 350.00 / ft	P 12600.00
Royal Cord	2mm ² x 4C	41 ft	P 100.00 / ft	P 4100.00
Drain Hose	White -1/2"	5 ft	P 25.00 / ft	P 125.00
Rubber Insulation	2 1/8x 3/4x 6'	5 pc(s)	P 350.00 / pc	P 1750.00
Full thread	3 meters	2 pc(s)	P 150.00 / pc	P 300.00
Pipe Hanger	3 inches	10 pc(s)	P 120.00 / pc	P 1200.00
PVC Pipe (Drain)	3/4- blue	1 pc(s)	P 150.00 / ft	P 150.00 P 20,225.00

FIRING 2**Area ≈ 0 sq.m****FCU13B 2.0hp Wall Mounted Inverter****KVM-20IWAH-I**

Estimated Pipe Length :	82	ft
Estimated Royal Cord Length :	87	ft

Initial Charge**P 8,500.00**

Includes:

Labor
10ft Copper Tube
10ft Royal Cord
Other Consumables

Additional Charges	Description	Unit	Price per Unit	Subtotal
Coppertube	1/4" x 5/8"	72 ft	P 350.00 / ft	P 25,200.00
Royal Cord	2mm ² x 4C	77 ft	P 100.00 / ft	P 7,700.00
Drain Hose	White -1/2"	5 ft	P 25.00 / ft	P 125.00
Rubber Insulation	2 1/8x 3/4x 6'	12 pc(s)	P 350.00 / pc	P 4,200.00
Full thread	3 meters	2 pc(s)	P 150.00 / pc	P 300.00
Pipe Hanger	3 inches	15 pc(s)	P 120.00 / pc	P 1,800.00
PVC Pipe (Drain)	3/4- blue	2 pc(s)	P 150.00 / ft	P 300.00 P 39,625.00

Estimated Charges for ACU13**P 83,200.00**

LECTURE ROOM	Area ≈ 50.9 sq.m
---------------------	------------------

ACU 14 4.0hp Floor mounted Inverter

KLG-IF40-5G1M32

Estimated Pipe Length : 33 ft

Estimated Royal Cord Length : 40 ft

Initial Charge

P 11,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket

Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	3/8"x 5/8"	23 ft	P 400.00 / ft	P 9,200.00
Royal Cord	2.mm2 x 4C	30 ft	P 100.00 / ft	P 3,000.00
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	5 ft	P 70.00 / ft	P 350.00
Circuit Breaker(NEMA)	40A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Outdoor Bracket(WALL)	fabricated	1 pc(s)	P 5,000.00 / pc	P 5,000.00
Rubber Insulation	2 1/8"x3/4" x 6'	4 pc(s)	P 350.00 / pc	P 1,400.00
Full Thread	3 meters	2 pc(s)	P 150.00 / pc	P 300.00
Pipe hanger	3 inches	8 pc(s)	P 120.00 / pc	P 960.00
PVC(Drainline)	3/4 inch- blue	2 pc(s)	P 150.00 / pc	P 300.00
				P 21,510.00
Estimated Charges				P 32,510.00

ACU 15 4.0hp Floor mounted Inverter

KLK-IF40-5G1M32

Estimated Pipe Length : 33 ft

Estimated Royal Cord Length : 38 ft

Initial Charge P 11,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Indoor Bracket

Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	3/8"x 5/8"	23 ft	P 400.00 / ft	P 9,200.00
Royal Cord	2.mm2 x 4C	28 ft	P 100.00 / ft	P 2,800.00
Royal Cord (ODU-Breaker)	5.5mm2 x 3C	5 ft	P 70.00 / ft	P 350.00
Circuit Breaker(NEMA)	40A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Outdoor Bracket(WALL)	fabricated	1 pc(s)	P 5,000.00 / pc	P 5,000.00
Rubber Insulation	2 1/8"x3/4" x 6'	4 pc(s)	P 350.00 / pc	P 1,400.00
Full Thread	3 meters	2 pc(s)	P 150.00 / pc	P 300.00
Pipe hanger	3 inches	8 pc(s)	P 120.00 / pc	P 960.00
PVC(Drainline)	3/4 inch- blue	2 pc(s)	P 150.00 / pc	P 300.00
				P 21,310.00

Estimated Charges	P 32,310.00
-------------------	-------------

EDRIS & NESS OFFICE

Area ≈ 50 sq.m

ACU 16 3.0hp Wallmounted Inverter**KSG-IWF-30Wfy-8K1M32**

Estimated Pipe Length : 33 ft

Estimated Royal Cord Length : 38 ft

Initial Charge

P 8,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	1/4"x 5/8"	23 ft	P 400.00 / ft	P 9,200.00
Royal Cord	2.mm2 x 4C	28 ft	P 100.00 / ft	P 2,800.00
Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P 60.00 / ft	P 300.00
Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Rubber Insulation	2 1/8"x3/4" x 6'	4 pc(s)	P 350.00 / pc	P 1,400.00
Full Thread	3 meters	2 pc(s)	P 150.00 / pc	P 300.00
Pipe hanger	3 inches	6 pc(s)	P 120.00 / pc	P 720.00
Outdoor Bracket(Special)	fabricated	1 pc(s)	P 5,000.00 / pc	P 5,000.00
				P 20,720.00

Estimated Charges**P 29,220.00****ACU 17 3.0hp Wallmounted Inverter****KSG-IWF-30Wfy-8K1M32**

Estimated Pipe Length : 27 ft

Estimated Royal Cord Length : 32 ft

Initial Charge

P 8,500.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Other Consumables

Additional Charges	Description	Unit	Price Per Unit	Subtotal
Copper Tube	1/4"x 5/8"	17 ft	P 400.00 / ft	P 6,800.00
Royal Cord	2.mm2 x 4C	22 ft	P 100.00 / ft	P 2,200.00
Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft	P 60.00 / ft	P 300.00
Circuit Breaker(NEMA)	30A/ 1Ph	1 pc(s)	P 1,000.00 / pc	P 1,000.00
Rubber Insulation	2 1/8"x3/4" x 6'	3 pc(s)	P 350.00 / pc	P 1,050.00
Full Thread	3 meters	2 pc(s)	P 150.00 / pc	P 300.00
Pipe hanger	3 inches	6 pc(s)	P 120.00 / pc	P 720.00
Outdoor Bracket(Special)	fabricated	1 pc(s)	P 5,000.00 / pc	P 5,000.00
				P 17,370.00

Estimated Charges**P 25,870.00**

SERVER					Area ≈ 8.9 sq.m	
ACU 18	1.0hp Wallmounted Inverter KSG - IWF - 10WFY8K1M32					
	Estimated Pipe Length :	33	ft			
	Estimated Royal Cord Length :	38	ft			
	Initial Charge				P	7,500.00
	Includes:					
	Labor					
	10ft Copper Tube					
	10ft Royal Cord					
	Other Consumables					
Additional Charges	Description	Unit		Price Per Unit	Subtotal	
Copper Tube	1/4"x 3/8"	23 ft	P	350.00 / ft	P 8,050.00	
Royal Cord	2.mm2 x 4C	28 ft		100.00 / ft	2,800.00	
Royal Cord (ODU-Breaker)	3.5mm2 x 3C	5 ft		60.00 / ft	300.00	
Circuit Breaker(NEMA)	20A/ 1Ph	1 pc(s)		1,000.00 / pc	1,000.00	
Rubber Insulation	2 1/8"x3/4" x 6'	4 pc(s)		350.00 / pc	1,400.00	
Full Thread	3 meters	1 pc(s)		150.00 / pc	150.00	
Pipe hanger	3 inches	6 pc(s)		120.00 / pc	720.00	
Outdoor Bracket(Special)	fabricated	1 pc(s)	P	5,000.00 / pc	P 5,000.00	P 19,420.00
Estimated Charges					P	26,920.00
Total Estimated Charges					P	966,795.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Note:

- 1 Location of indoor and outdoor are all based on mechanical plan submitted by customer.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Schedule for markings first for pipe layout and drain provisions with Installer.
- 4 **SERVER ROOM, Need 2 units if use for 24hours. Alternate usage every 12hours.**
- 5 Upon approval of the installation, a waiver shall be prepared and executed by the customer acknowledging that the copper tube layout of FCU13B (Firing 2) exceeds the manufacturer's maximum allowable piping length of 20 meters for a 4.0 HP outdoor unit, and that of FCU9A exceeds the maximum allowable piping length of 25 meters for a 5.0 HP outdoor unit based on mechanical plan. The customer further acknowledges that such deviation is beyond standard design parameters and may result in a reduction of overall system efficiency.
- 6 Working days: Monday to Saturday, 8am- 5pm. With parking.
- 7 Mechanical Plans, Permits, Electrical permits not included.
- 8 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 9 Electrical power supply (feeder line) is not included in the scope of work of Kolin.
- 10 **Final charges will be based on actual installation.**

Prepared by:

Jeoffrey Dadios

Field Surveyor

Customer Conformance:


Signature Over Printed Name

Reviewed by:


Engr. Kenneth Zamora

Service Supervisor


Field and Shop Operation

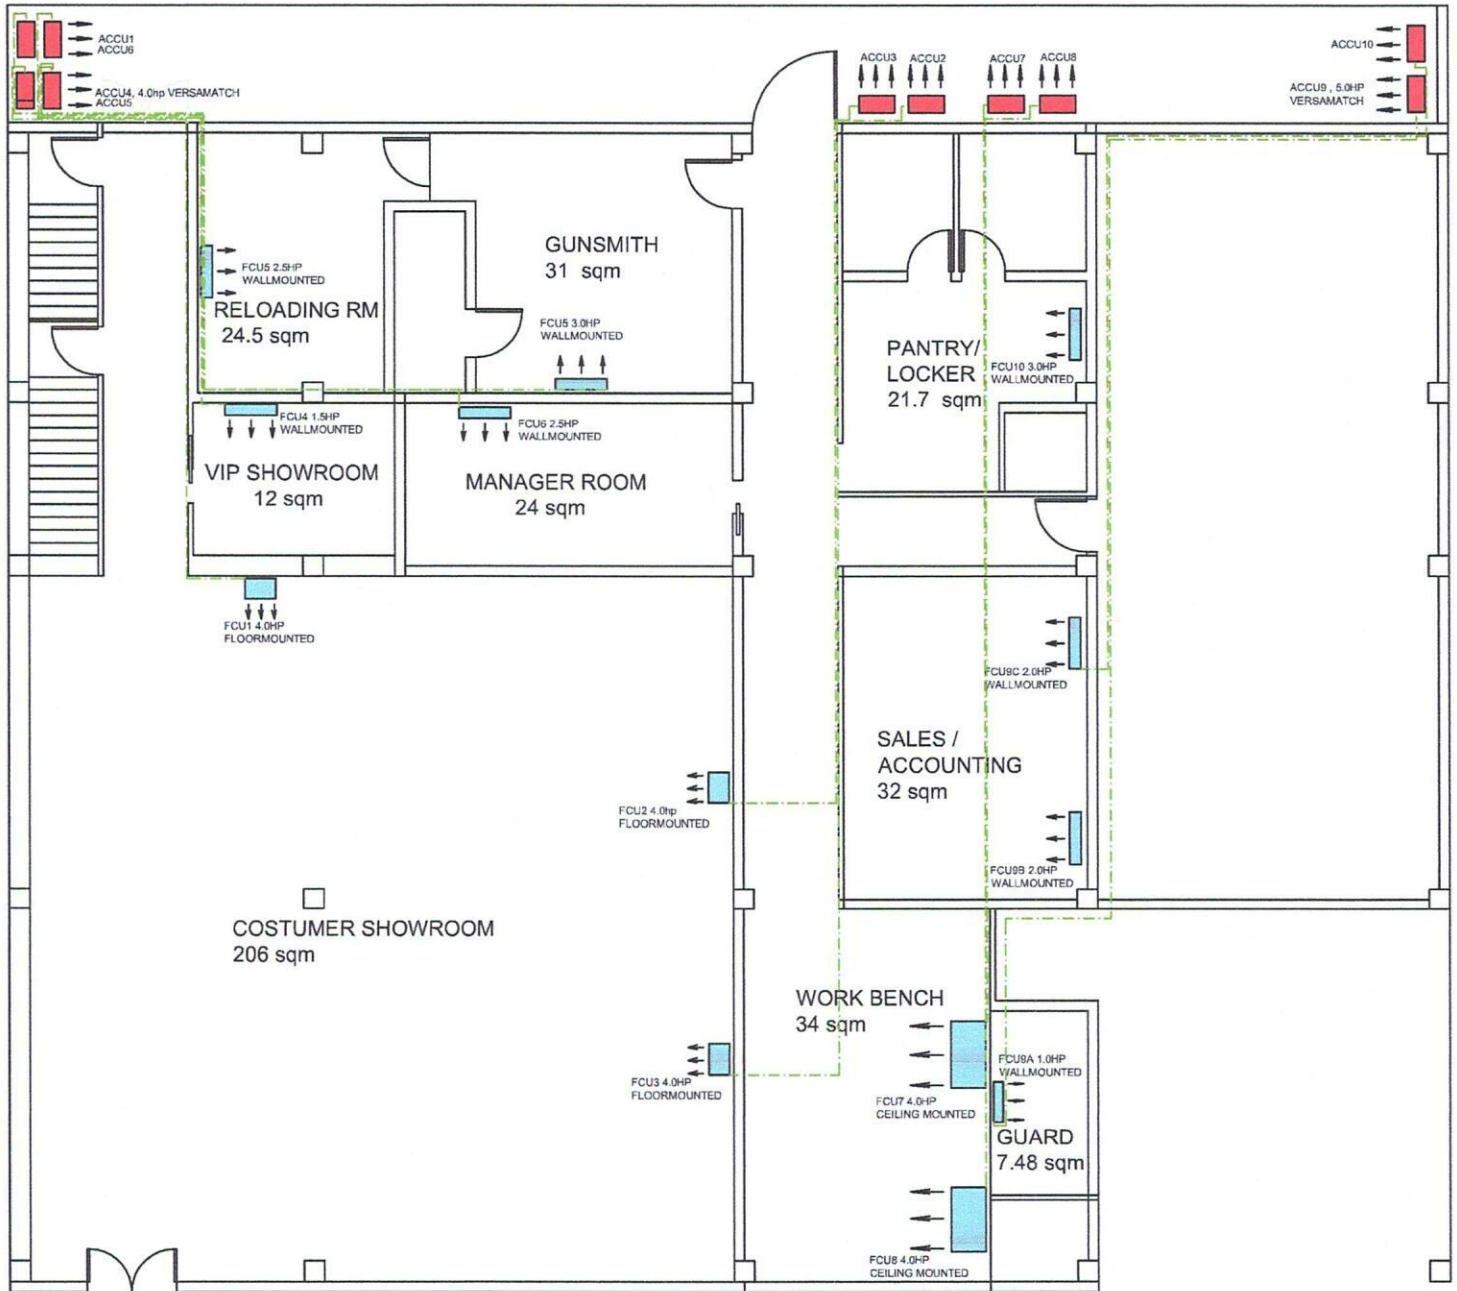

GROUND FLOOR

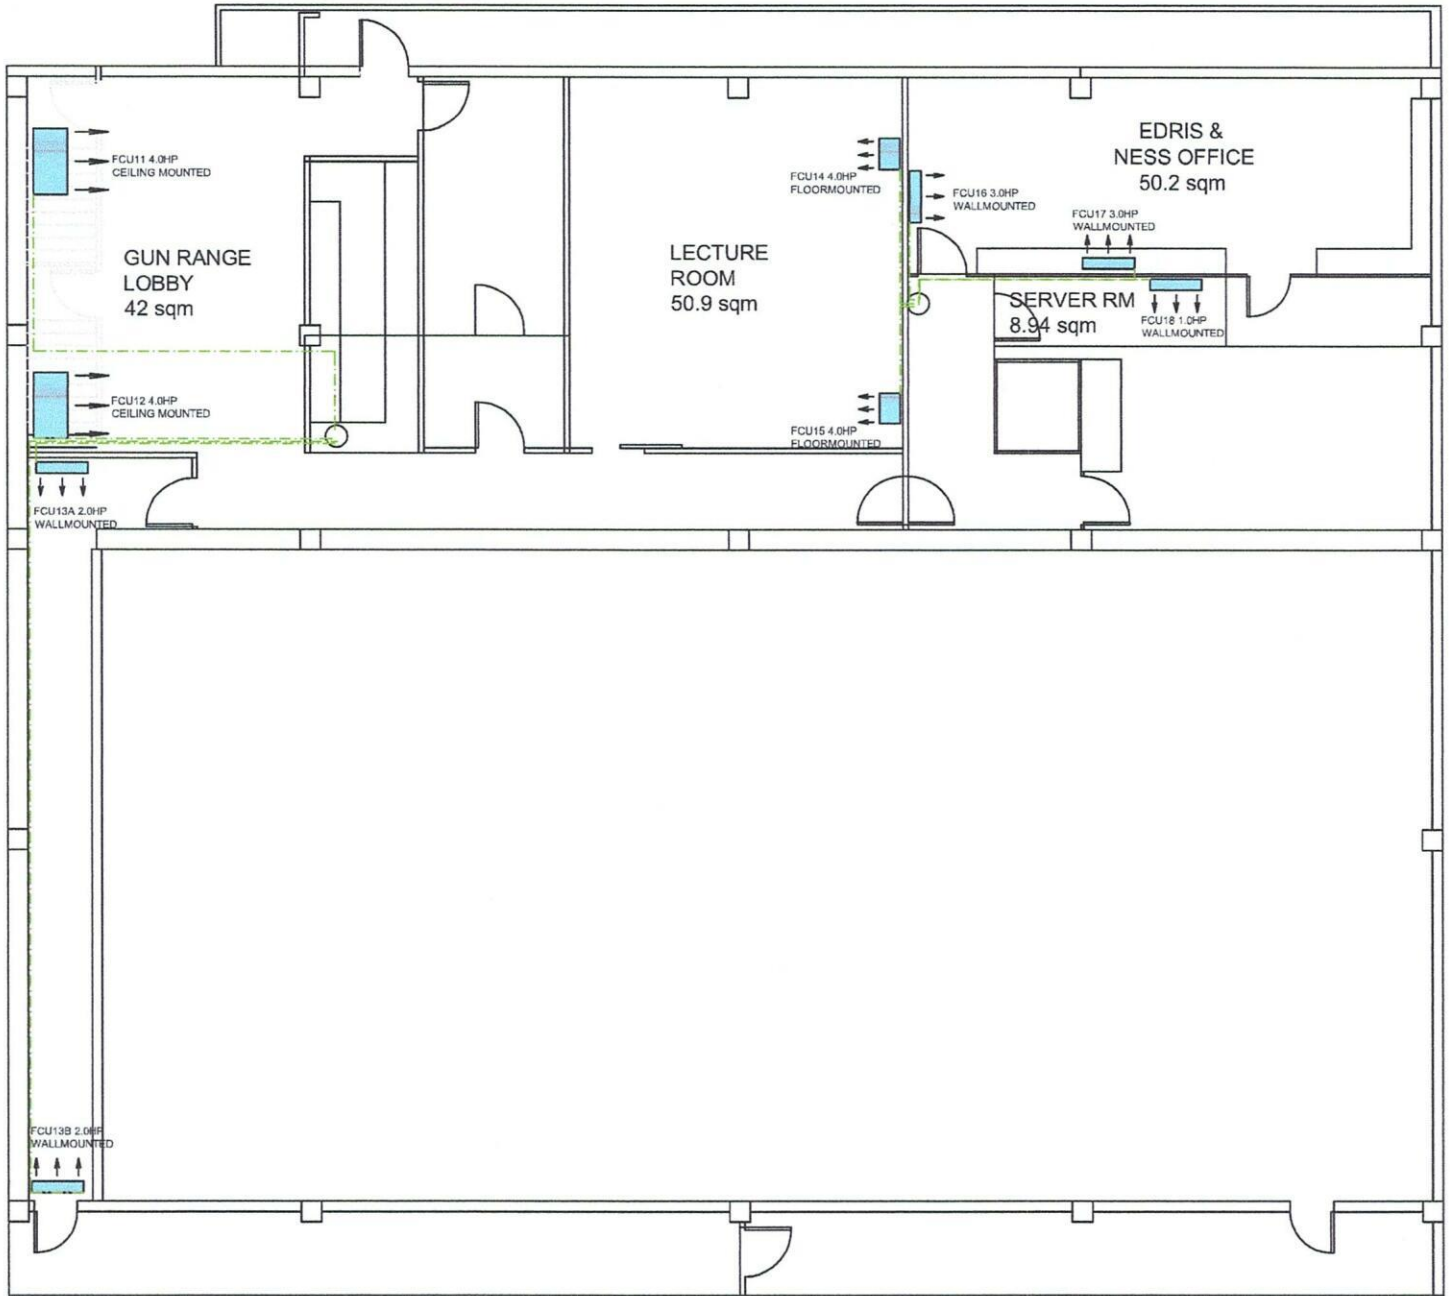

SECOND FLOOR

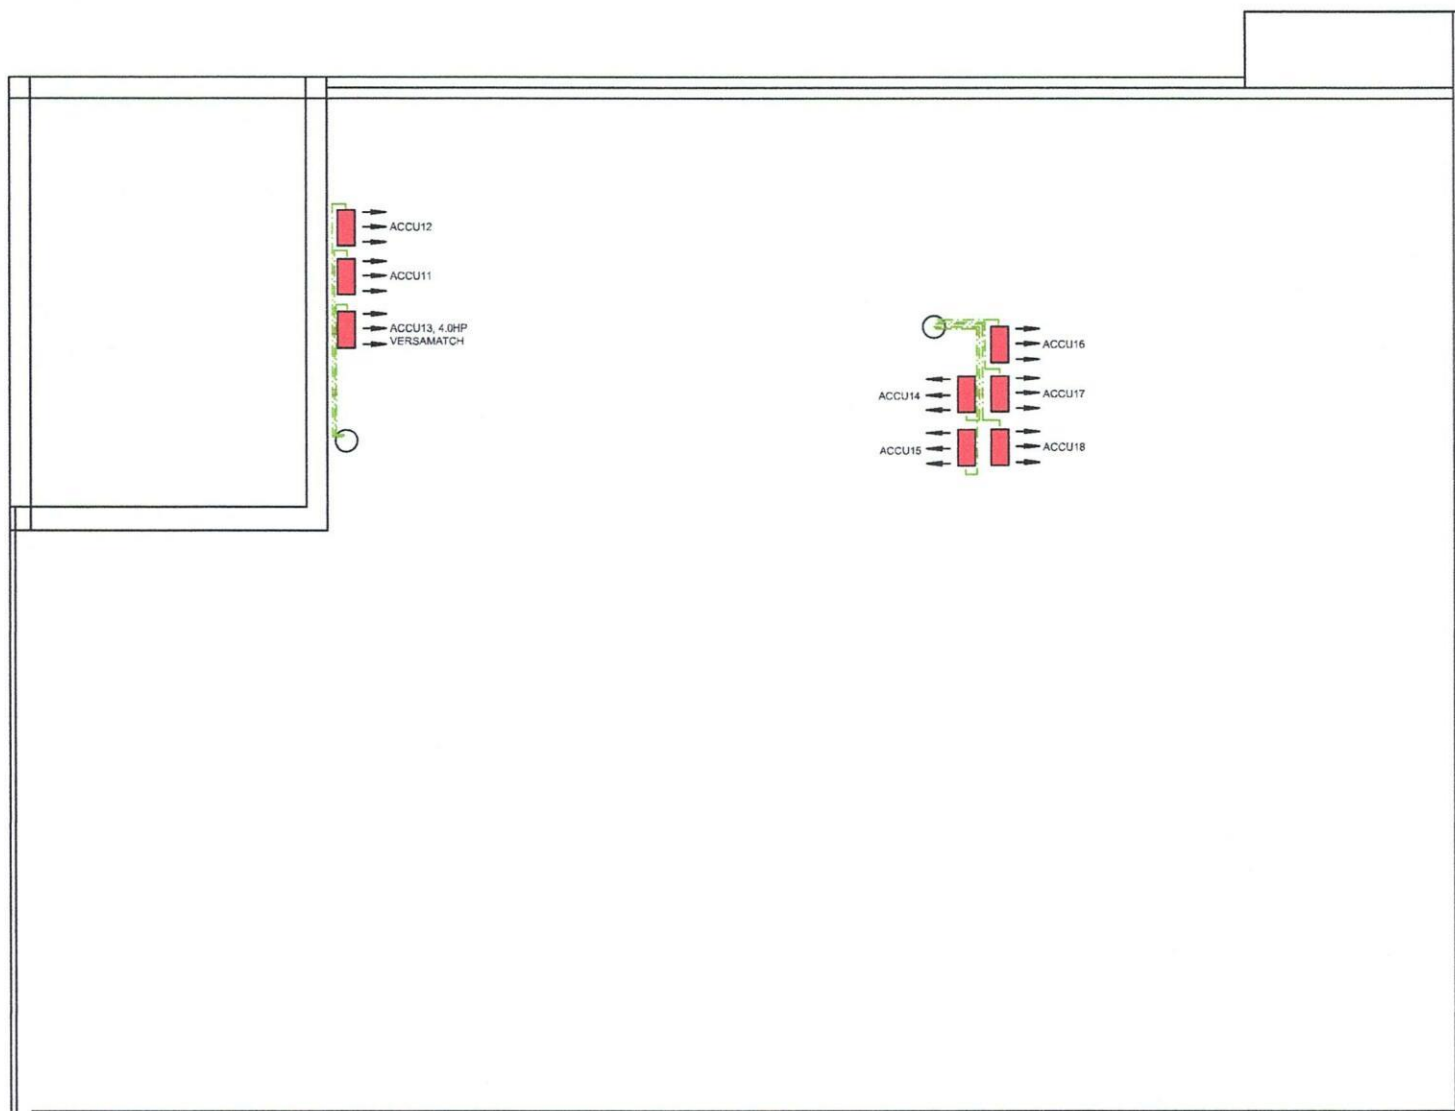

ROOF AREA