



September 24, 2025

THE GREENHOUSE
TOURISM RD., BRGY. CATANGNAN, GENERAL LUNA, SURIGAO DEL NORTE

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
4	UNIT/S	MODEL: KSG-IWF-10WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 11,484 Kj/h (1.0HP) FULL DC INVERTER W/ WIFI R-32	42,595.00	24,520.30	PHP	98,081.20
1	UNIT/S	MODEL: KSG-IWF-15WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 12,960 Kj/h (1.5HP) FULL DC INVERTER W/ WIFI R-32	46,595.00	27,480.30	PHP	27,480.30
1	UNIT/S	MODEL: KSG-IWF-20WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 19,000 Kj/h (2.0HP) FULL DC INVERTER W/ WIFI R-32	59,595.00	37,100.30	PHP	37,100.30
15	UNIT/S	MODEL: KSG-IWF-25WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	44,056.30	PHP	660,844.50
23	UNIT/S	MODEL: KSG-IWF-30WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	49,680.30	PHP	1,142,646.90
1	UNIT/S	MODEL: KLG-IF40-5G1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 37,980 Kj/h (3.0TR) FULL DC INVERTER R-32 SINGLE PHASE	113,195.00	76,764.30	PHP	76,764.30
2	UNIT/S	MODEL: KL-IF60-G6H1M32 KOLIN FLOOR MOUNTED AIRCONDITIONER 58,140 Kj/h (5.0TR) FULL DC INVERTER R32 SINGLE PHASE	165,995.00	108,836.30	PHP	217,672.60
TOTAL UNIT COST					PHP	2,260,590.10
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	1,503,970.00
TOTAL ESTIMATED COST OF THE PROJECT					PHP	3,764,560.10

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.
FOR FLOOR MOUNTED (Inverter): ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

NOTES: *** Need to sign waiver agreement due to under capacity of unit choice (based on provided floor plan).

PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.
PRICES IS VAT INCLUSIVE.

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

** This quotation is based on provided floor plan only. Please carefully read installation notes on the attachment for scope of works.

** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:
MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:
MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-09-25-0703-rev
TCS-26%/7K/14K

Conforme: _____
SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.
1854 Sta. Rita St., Guadalupe Nuevo, Makati City
Tel.: (632) 8852-6473
Fax: (632) 8852-2170 / (632) 8852-4792
www.kolinphil.com.ph / kolinphilippines



Customer Name:	The Greenhouse	Date:	September 17, 2025
Customer Address:	Tourism rd. Brgy. Catangnan, General Luna, Surigao Del Norte		

Qty	Unit Model	Unit Capacity/Type
4	KSG-IWF-10Wfy8K1M32	1.0HP Wall Mounted Inverter
1	KSG-IWF-15Wfy8K1M32	1.5HP Wall Mounted Inverter
1	KSG-IWF-20Wfy8K1M32	2.0HP Wall Mounted Inverter
15	KSG-IWF-25Wfy8K1M32	2.5HP Wall Mounted Inverter
23	KSG-IWF-30Wfy8K1M32	3.0HP Wall Mounted Inverter
1	KLg-IF40-5G1M32	4.0HP Floor Standing Inverter
2	KL-IF60-G6H1M32	6.0HP Floor Standing Inverter

GROUND FLOOR

Location/s:		Foot Spa Area		Area:	20.00 sqm.
ACU #:	01	Unit Model:	KSG-IWF-25Wfy8K1M32	Unit Capacity/Type:	2.5HP Wall Mounted Inverter

Estimated Pipe Length = 65 ft

Estimated Royal Cord Length = 70 ft

Initial Charge

₱ 8,500.00

10ft Copper tube

10ft Royal Cord

Outdoor bracket Wall/Floor

Consumables

Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	55 ft	₱ 400.00 /ft	₱ 22,000.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	60 ft	100.00 /ft	6,000.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	8 pc	420.00 /pc	3,360.00
Rubber Insulation	2½" x 3/4" x 6'	7 pc	₱ 350.00 /pc	₱ 2,450.00

Estimated Charges ₱ 43,610.00

Location/s:	Massage Room1	Area:	10.00 sqm.
--------------------	---------------	--------------	------------

ACU #:	02	Unit Model:	KSG-IWF-10Wfy8K1M32	Unit Capacity/Type:	1.0HP Wall Mounted Inverter
---------------	----	--------------------	---------------------	----------------------------	-----------------------------

Estimated Pipe Length = 48 ft

Estimated Royal Cord Length = 53 ft

Initial Charge ₱ 7,500.00

10ft Copper tube

10ft Royal Cord

Outdoor bracket Wall/Floor

Consumables

Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	3/8"Ø x 1/4"Ø	38 ft	₱ 350.00 /ft	₱ 13,300.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	43 ft	100.00 /ft	4,300.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	20Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	3 pc	420.00 /pc	1,260.00
Rubber Insulation	2½" x 3/4" x 6'	3 pc	₱ 350.00 /pc	₱ 1,050.00

Estimated Charges ₱ 28,710.00

Location/s:	Massage Room2	Area:	10.00 sqm.
--------------------	---------------	--------------	------------

ACU #:	03	Unit Model:	KSG-IWF-10Wfy8K1M32	Unit Capacity/Type:	1.0HP Wall Mounted Inverter
---------------	----	--------------------	---------------------	----------------------------	-----------------------------

Estimated Pipe Length = 53 ft

Estimated Royal Cord Length = 58 ft

Initial Charge ₱ 7,500.00

10ft Copper tube

10ft Royal Cord

Outdoor bracket Wall/Floor

Consumables

Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	3/8"Ø x 1/4"Ø	43 ft	₱ 350.00 /ft	₱ 15,050.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	48 ft	100.00 /ft	4,800.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	20Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	4 pc	420.00 /pc	1,680.00
Rubber Insulation	2½" x 3/4" x 6'	3 pc	₱ 350.00 /pc	₱ 1,050.00

Estimated Charges ₱ 31,380.00

Location/s:	Wine Bar	Area:	54.00 sqm.
--------------------	-----------------	--------------	-------------------

ACU #:	04	Unit Model:	KSG-IWF-30WY8K1M32	Unit Capacity/Type:	3.0HP Wall Mounted Inverter
---------------	-----------	--------------------	---------------------------	----------------------------	------------------------------------

Estimated Pipe Length = 59 ft

Estimated Royal Cord Length = 64 ft

Initial Charge ₱ 8,500.00

10ft Copper tube
10ft Royal Cord
Outdoor bracket Wall/Floor
Consumables
Testing and Commissioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	49 ft	₱ 400.00 /ft	₱ 19,600.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	54 ft	100.00 /ft	5,400.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuit Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	4 pc	420.00 /pc	1,680.00
Rubber Insulation	2½" x 3/4" x 6'	3 pc	₱ 350.00 /pc	₱ 1,050.00

Estimated Charges ₱ 37,530.00

Location/s:	All Day Dining Area	Area:	94.00 sqm.
--------------------	----------------------------	--------------	-------------------

ACU #:	05	Unit Model:	KL-IF60-G6H1M32	Unit Capacity/Type:	6.0HP Floor Standing Inverter
---------------	-----------	--------------------	------------------------	----------------------------	--------------------------------------

Estimated Pipe Length = 96 ft

Estimated Royal Cord Length = 101 ft

Initial Charge ₱ 14,000.00

10ft Copper tube
10ft Royal Cord
Indoor bracket (floor)
Consumables
Testing and Commissioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 3/8"Ø	86 ft	₱ 400.00 /ft	₱ 34,400.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	91 ft	100.00 /ft	9,100.00
Royal Cord (Power Supply)	(#10) 5.5 sqmm. x 3c	5 ft	70.00 /ft	350.00
Circuit Breaker Weather Proof	60Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Outdoor Unit Bracket Type	Fabricated wall	1 set	5,000.00 /set	5,000.00
Pipe Hanger Assembly	Clamp and Full thread	13 pc	420.00 /pc	5,460.00
Rubber Insulation	2½" x 3/4" x 6'	10 pc	₱ 350.00 /pc	₱ 3,500.00

Estimated Charges ₱ 72,810.00

ACU #:	06	Unit Model:	KLG-IF40-5G1M32	Unit Capacity/Type:	4.0HP Floor Standing Inverter
---------------	----	--------------------	-----------------	----------------------------	-------------------------------

Estimated Pipe Length = 73 ft

Estimated Royal Cord Length = 78 ft

Initial Charge ₱ 11,000.00

10ft Copper tube
10ft Royal Cord
Indoor bracket (floor)
Consumables
Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 3/8"Ø	63 ft	₱ 400.00 /ft	₱ 25,200.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	68 ft	100.00 /ft	6,800.00
Royal Cord (Power Supply)	(#10) 5.5 sqmm. x 3c	5 ft	70.00 /ft	350.00
Circuir Breaker Weather Proof	40Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Outdoor Unit Bracket Type	Fabricated wall	1 set	5,000.00 /set	5,000.00
Pipe Hanger Assembly	Clamp and Full thread	7 pc	420.00 /pc	2,940.00
Rubber Insulation	2½" x 3/4" x 6'	6 pc	₱ 350.00 /pc	₱ 2,100.00

Estimated Charges ₱ 54,390.00

ACU #:	07	Unit Model:	KL-IF60-G6H1M32	Unit Capacity/Type:	6.0HP Floor Standing Inverter
---------------	----	--------------------	-----------------	----------------------------	-------------------------------

Estimated Pipe Length = 65 ft

Estimated Royal Cord Length = 70 ft

Initial Charge ₱ 14,000.00

10ft Copper tube
10ft Royal Cord
Indoor bracket (floor)
Consumables
Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 3/8"Ø	55 ft	₱ 400.00 /ft	₱ 22,000.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	60 ft	100.00 /ft	6,000.00
Royal Cord (Power Supply)	(#10) 5.5 sqmm. x 3c	5 ft	70.00 /ft	350.00
Circuir Breaker Weather Proof	60Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Outdoor Unit Bracket Type	Fabricated wall	1 set	5,000.00 /set	5,000.00
Pipe Hanger Assembly	Clamp and Full thread	6 pc	420.00 /pc	2,520.00
Rubber Insulation	2½" x 3/4" x 6'	5 pc	₱ 350.00 /pc	₱ 1,750.00

Estimated Charges ₱ 52,620.00

Location/s:	Kitchen		Area:	60.00 sqm.
ACU #:	08	Unit Model:	KSG-IWF-30Wfy8K1M32	Unit Capacity/Type: 3.0HP Wall Mounted Inverter
Estimated Pipe Length = 56 ft Estimated Royal Cord Length = 61 ft Initial Charge ₱ 8,500.00 10ft Copper tube 10ft Royal Cord Outdoor bracket Wall/Floor Consumables Testing and Commisioning				
Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	46 ft	₱ 400.00 /ft	₱ 18,400.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	51 ft	100.00 /ft	5,100.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	1 ft	60.00 /ft	60.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	4 pc	420.00 /pc	1,680.00
Rubber Insulation	2½" x 3/4" x 6'	3 pc	₱ 350.00 /pc	₱ 1,050.00
Estimated Charges				₱ 35,790.00

ACU #:	09	Unit Model:	KSG-IWF-30Wfy8K1M32	Unit Capacity/Type: 3.0HP Wall Mounted Inverter
Estimated Pipe Length = 46 ft Estimated Royal Cord Length = 51 ft Initial Charge ₱ 8,500.00 10ft Copper tube 10ft Royal Cord Outdoor bracket Wall/Floor Consumables Testing and Commisioning				
Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	36 ft	₱ 400.00 /ft	₱ 14,400.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	41 ft	100.00 /ft	4,100.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	4 pc	420.00 /pc	1,680.00
Rubber Insulation	2½" x 3/4" x 6'	4 pc	₱ 350.00 /pc	₱ 1,400.00
Estimated Charges				₱ 31,380.00

Location/s:	Clinic/Lactation Room		Area:	7.00 sqm.
ACU #:	10	Unit Model:	KSG-IWF-10WFY8K1M32	Unit Capacity/Type: 1.0HP Wall Mounted Inverter
Estimated Pipe Length = 40 ft Estimated Royal Cord Length = 45 ft Initial Charge ₱ 7,500.00 10ft Copper tube 10ft Royal Cord Outdoor bracket Wall/Floor Consumables Testing and Commisioning				
Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	3/8"Ø x 1/4"Ø	30 ft	₱ 350.00 /ft	₱ 10,500.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	35 ft	100.00 /ft	3,500.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	20Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	2 pc	420.00 /pc	840.00
Rubber Insulation	2½" x 3/4" x 6'	2 pc	₱ 350.00 /pc	₱ 700.00
Estimated Charges				₱ 24,340.00

Location/s:	Ground Floor Office		Area:	* sqm.
ACU #:	11	Unit Model:	KSG-IWF-20WFY8K1M32	Unit Capacity/Type: 2.0HP Wall Mounted Inverter
Estimated Pipe Length = 33 ft Estimated Royal Cord Length = 38 ft Initial Charge ₱ 8,500.00 10ft Copper tube 10ft Royal Cord Outdoor bracket Wall/Floor Consumables Testing and Commisioning				
Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	1/2"Ø x 1/4"Ø	23 ft	₱ 350.00 /ft	₱ 8,050.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	28 ft	100.00 /ft	2,800.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Rubber Insulation	2½" x 3/4" x 6'	2 pc	₱ 350.00 /pc	₱ 700.00
Estimated Charges				₱ 21,350.00

ACU #:	12	Unit Model:	KSG-IWF-15Wfy8K1M32	Unit Capacity/Type:	1.5HP Wall Mounted Inverter
Estimated Pipe Length = 64 ft Estimated Royal Cord Length = 69 ft Initial Charge ₱ 7,500.00 10ft Copper tube 10ft Royal Cord Outdoor bracket Wall/Floor Consumables Testing and Commisioning					
Installation Materials	Specification	Qty	Price per qty	Subtotal	
Insulated Copper tube	3/8"Ø x 1/4"Ø	54 ft	₱ 350.00 /ft	₱	18,900.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	59 ft	100.00 /ft		5,900.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft		300.00
Circuir Breaker Weather Proof	20Amps / 1Ph	1 pc	1,000.00 /pc		1,000.00
Pipe Hanger Assembly	Clamp and Full thread	6 pc	420.00 /pc		2,520.00
Rubber Insulation	2½" x 3/4" x 6'	5 pc	₱ 350.00 /pc	₱	1,750.00
Estimated Charges				₱	37,870.00

Location/s:		Security and IT		Area:	4.00 sqm.	
ACU #:	12a	Unit Model:	KSG-IWF-10Wfy8K1M32	Unit Capacity/Type:	1.0HP Wall Mounted Inverter	
Estimated Pipe Length = 33 ft						
Estimated Royal Cord Length = 38 ft						
Initial Charge					₱ 7,500.00	
10ft Copper tube						
10ft Royal Cord						
Outdoor bracket Wall/Floor						
Consumables						
Testing and Commisioning						
Installation Materials		Specification		Qty	Price per qty	Subtotal
Insulated Copper tube		3/8"Ø x 1/4"Ø		23 ft	₱ 350.00 /ft	₱ 8,050.00
Royal Cord (Comm wire)		2.0 sq.mm x 4c		28 ft	100.00 /ft	2,800.00
Royal Cord (Power Supply)		(#12) 3.5 sqmm. x 3c		5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof		20Amps / 1Ph		1 pc	1,000.00 /pc	1,000.00
Rubber Insulation		2½" x 3/4" x 6'		2 pc	₱ 350.00 /pc	₱ 700.00
Estimated Charges						₱ 20,350.00

SECOND FLOOR

Location/s:	Standard Room 4	Area:	26.00 sqm.
--------------------	-----------------	--------------	------------

ACU #:	13	Unit Model:	KSG-IWF-25WFFY8K1M32	Unit Capacity/Type:	2.5HP Wall Mounted Inverter
---------------	----	--------------------	----------------------	----------------------------	-----------------------------

Estimated Pipe Length = 30 ft

Estimated Royal Cord Length = 35 ft

Initial Charge ₱ 8,500.00

10ft Copper tube
10ft Royal Cord
Outdoor bracket Wall/Floor
Consumables
Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	20 ft	₱ 400.00 /ft	₱ 8,000.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	25 ft	100.00 /ft	2,500.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Rubber Insulation	2½" x 3/4" x 6'	1 pc	₱ 350.00 /pc	₱ 350.00

Estimated Charges ₱ 20,650.00

Location/s:	Standard Room 3	Area:	26.00 sqm.
--------------------	-----------------	--------------	------------

ACU #:	14	Unit Model:	KSG-IWF-25WFFY8K1M32	Unit Capacity/Type:	2.5HP Wall Mounted Inverter
---------------	----	--------------------	----------------------	----------------------------	-----------------------------

Estimated Pipe Length = 37 ft

Estimated Royal Cord Length = 42 ft

Initial Charge ₱ 8,500.00

10ft Copper tube
10ft Royal Cord
Outdoor bracket Wall/Floor
Consumables
Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	27 ft	₱ 400.00 /ft	₱ 10,800.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	32 ft	100.00 /ft	3,200.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	2 pc	420.00 /pc	840.00
Rubber Insulation	2½" x 3/4" x 6'	2 pc	₱ 350.00 /pc	₱ 700.00

Estimated Charges ₱ 25,340.00

Location/s:	Standard Room 2	Area:	26.00 sqm.
--------------------	-----------------	--------------	------------

ACU #:	15	Unit Model:	KSG-IWF-25WFY8K1M32	Unit Capacity/Type:	2.5HP Wall Mounted Inverter
---------------	----	--------------------	---------------------	----------------------------	-----------------------------

Estimated Pipe Length = 31 ft

Estimated Royal Cord Length = 36 ft

Initial Charge ₱ 8,500.00

10ft Copper tube
10ft Royal Cord
Outdoor bracket Wall/Floor
Consumables
Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	21 ft	₱ 400.00 /ft	₱ 8,400.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	26 ft	100.00 /ft	2,600.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	1 pc	₱ 350.00 /pc	₱ 350.00

Estimated Charges ₱ 21,150.00

Location/s:	Standard Room 1	Area:	26.00 sqm.
--------------------	-----------------	--------------	------------

ACU #:	16	Unit Model:	KSG-IWF-25WFY8K1M32	Unit Capacity/Type:	2.5HP Wall Mounted Inverter
---------------	----	--------------------	---------------------	----------------------------	-----------------------------

Estimated Pipe Length = 37 ft

Estimated Royal Cord Length = 42 ft

Initial Charge ₱ 8,500.00

10ft Copper tube
10ft Royal Cord
Outdoor bracket Wall/Floor
Consumables
Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	27 ft	₱ 400.00 /ft	₱ 10,800.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	32 ft	100.00 /ft	3,200.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	2 pc	420.00 /pc	840.00
Rubber Insulation	2 1/8" x 3/4" x 6'	2 pc	₱ 350.00 /pc	₱ 700.00

Estimated Charges ₱ 25,340.00

Location/s:	Deluxe Room 4		Area:	31.00 sqm.
ACU #:	17	Unit Model:	KSG-IWF-30WFY8K1M32	Unit Capacity/Type: 3.0HP Wall Mounted Inverter
Estimated Pipe Length = 38 ft Estimated Royal Cord Length = 43 ft Initial Charge ₱ 8,500.00 10ft Copper tube 10ft Royal Cord Outdoor bracket Wall/Floor Consumables Testing and Commisioning				
Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	28 ft	₱ 400.00 /ft	₱ 11,200.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	33 ft	100.00 /ft	3,300.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	2 pc	420.00 /pc	840.00
Rubber Insulation	2½" x 3/4" x 6'	2 pc	₱ 350.00 /pc	₱ 700.00
Estimated Charges				₱ 25,840.00

Location/s:	Deluxe Room 3		Area:	31.00 sqm.
ACU #:	18	Unit Model:	KSG-IWF-30WFY8K1M32	Unit Capacity/Type: 3.0HP Wall Mounted Inverter
Estimated Pipe Length = 32 ft Estimated Royal Cord Length = 37 ft Initial Charge ₱ 8,500.00 10ft Copper tube 10ft Royal Cord Outdoor bracket Wall/Floor Consumables Testing and Commisioning				
Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	22 ft	₱ 400.00 /ft	₱ 8,800.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	27 ft	100.00 /ft	2,700.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	1 pc	420.00 /pc	420.00
Rubber Insulation	2½" x 3/4" x 6'	1 pc	₱ 350.00 /pc	₱ 350.00
Estimated Charges				₱ 22,070.00

Location/s:	Deluxe Room 2	Area:	31.00	sqm.
-------------	---------------	-------	-------	------

ACU #:	19	Unit Model:	KSG-IWF-30WFY8K1M32	Unit Capacity/Type:	3.0HP Wall Mounted Inverter
--------	----	-------------	---------------------	---------------------	-----------------------------

Estimated Pipe Length = 38 ft

Estimated Royal Cord Length = 43 ft

Initial Charge ₱ 8,500.00

10ft Copper tube

10ft Royal Cord

Outdoor bracket Wall/Floor

Consumables

Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	28 ft	₱ 400.00 /ft	₱ 11,200.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	33 ft	100.00 /ft	3,300.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	2 pc	420.00 /pc	840.00
Rubber Insulation	2½" x 3/4" x 6'	2 pc	₱ 350.00 /pc	₱ 700.00

Estimated Charges ₱ 25,840.00

Location/s:	Deluxe Room 1	Area:	31.00	sqm.
-------------	---------------	-------	-------	------

ACU #:	20	Unit Model:	KSG-IWF-30WFY8K1M32	Unit Capacity/Type:	3.0HP Wall Mounted Inverter
--------	----	-------------	---------------------	---------------------	-----------------------------

Estimated Pipe Length = 32 ft

Estimated Royal Cord Length = 37 ft

Initial Charge ₱ 8,500.00

10ft Copper tube

10ft Royal Cord

Outdoor bracket Wall/Floor

Consumables

Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	22 ft	₱ 400.00 /ft	₱ 8,800.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	27 ft	100.00 /ft	2,700.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	1 pc	420.00 /pc	420.00
Rubber Insulation	2½" x 3/4" x 6'	1 pc	₱ 350.00 /pc	₱ 350.00

Estimated Charges ₱ 22,070.00

Location/s:	Co-Working Space	Area:	75.00 sqm.
-------------	------------------	-------	------------

ACU #:	21	Unit Model:	KSG-IWF-30WFY8K1M32	Unit Capacity/Type:	3.0HP Wall Mounted Inverter
--------	----	-------------	---------------------	---------------------	-----------------------------

Estimated Pipe Length = 55 ft

Estimated Royal Cord Length = 60 ft

Initial Charge ₱ 8,500.00

10ft Copper tube

10ft Royal Cord

Outdoor bracket Wall/Floor

Consumables

Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	45 ft	₱ 400.00 /ft	₱ 18,000.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	50 ft	100.00 /ft	5,000.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	4 pc	420.00 /pc	1,680.00
Rubber Insulation	2 1/8" x 3/4" x 6'	4 pc	₱ 350.00 /pc	₱ 1,400.00

Estimated Charges ₱ 35,880.00

ACU #:	22	Unit Model:	KSG-IWF-30WFY8K1M32	Unit Capacity/Type:	3.0HP Wall Mounted Inverter
--------	----	-------------	---------------------	---------------------	-----------------------------

Estimated Pipe Length = 72 ft

Estimated Royal Cord Length = 77 ft

Initial Charge ₱ 8,500.00

10ft Copper tube

10ft Royal Cord

Outdoor bracket Wall/Floor

Consumables

Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	62 ft	₱ 400.00 /ft	₱ 24,800.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	67 ft	100.00 /ft	6,700.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	7 pc	420.00 /pc	2,940.00
Rubber Insulation	2 1/8" x 3/4" x 6'	6 pc	₱ 350.00 /pc	₱ 2,100.00

Estimated Charges ₱ 46,340.00

Location/s:	Pre - Function Room	Area:	24.00 sqm.
--------------------	----------------------------	--------------	-------------------

ACU #:	23	Unit Model:	KSG-IWF-30Wfy8K1M32	Unit Capacity/Type:	3.0HP Wall Mounted Inverter
---------------	-----------	--------------------	----------------------------	----------------------------	------------------------------------

Estimated Pipe Length = 70 ft

Estimated Royal Cord Length = 75 ft

Initial Charge ₱ 8,500.00

10ft Copper tube
10ft Royal Cord
Outdoor bracket Wall/Floor
Consumables
Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	60 ft	₱ 400.00 /ft	₱ 24,000.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	65 ft	100.00 /ft	6,500.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	9 pc	420.00 /pc	3,780.00
Rubber Insulation	2½" x 3/4" x 6'	8 pc	₱ 350.00 /pc	₱ 2,800.00
Estimated Charges				₱ 46,880.00

Location/s:	Function Room	Area:	220.00 sqm.
--------------------	----------------------	--------------	--------------------

ACU #:	24	Unit Model:	KSG-IWF-30Wfy8K1M32	Unit Capacity/Type:	3.0HP Wall Mounted Inverter
---------------	-----------	--------------------	----------------------------	----------------------------	------------------------------------

Estimated Pipe Length = 39 ft

Estimated Royal Cord Length = 44 ft

Initial Charge ₱ 8,500.00

10ft Copper tube
10ft Royal Cord
Outdoor bracket Wall/Floor
Consumables
Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	29 ft	₱ 400.00 /ft	₱ 11,600.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	34 ft	100.00 /ft	3,400.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	3 pc	420.00 /pc	1,260.00
Rubber Insulation	2½" x 3/4" x 6'	3 pc	₱ 350.00 /pc	₱ 1,050.00
Estimated Charges				₱ 27,110.00

ACU #:	25	Unit Model:	KSG-IWF-30Wfy8K1M32	Unit Capacity/Type:	3.0HP Wall Mounted Inverter
Estimated Pipe Length = 65 ft Estimated Royal Cord Length = 70 ft Initial Charge ₱ 8,500.00 10ft Copper tube 10ft Royal Cord Outdoor bracket Wall/Floor Consumables Testing and Commisioning					
Installation Materials	Specification	Qty	Price per qty	Subtotal	
Insulated Copper tube	5/8"Ø x 1/4"Ø	55 ft	₱ 400.00 /ft	₱ 22,000.00	
Royal Cord (Comm wire)	2.0 sq.mm x 4c	60 ft	100.00 /ft	6,000.00	
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00	
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00	
Pipe Hanger Assembly	Clamp and Full thread	8 pc	420.00 /pc	3,360.00	
Rubber Insulation	2½" x 3/4" x 6'	7 pc	₱ 350.00 /pc	₱ 2,450.00	
Estimated Charges				₱ 43,610.00	

ACU #:	26	Unit Model:	KSG-IWF-30Wfy8K1M32	Unit Capacity/Type:	3.0HP Wall Mounted Inverter
Estimated Pipe Length = 65 ft Estimated Royal Cord Length = 70 ft Initial Charge ₱ 8,500.00 10ft Copper tube 10ft Royal Cord Outdoor bracket Wall/Floor Consumables Testing and Commisioning					
Installation Materials	Specification	Qty	Price per qty	Subtotal	
Insulated Copper tube	5/8"Ø x 1/4"Ø	55 ft	₱ 400.00 /ft	₱ 22,000.00	
Royal Cord (Comm wire)	2.0 sq.mm x 4c	60 ft	100.00 /ft	6,000.00	
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00	
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00	
Pipe Hanger Assembly	Clamp and Full thread	8 pc	420.00 /pc	3,360.00	
Rubber Insulation	2½" x 3/4" x 6'	7 pc	₱ 350.00 /pc	₱ 2,450.00	
Estimated Charges				₱ 43,610.00	

ACU #:	27	Unit Model:	KSG-IWF-30WFY8K1M32	Unit Capacity/Type:	3.0HP Wall Mounted Inverter
Estimated Pipe Length	=	65	ft		
Estimated Royal Cord Length	=	70	ft		
Initial Charge					₱ 8,500.00
10ft Copper tube					
10ft Royal Cord					
Outdoor bracket Wall/Floor					
Consumables					
Testing and Commisioning					
Installation Materials	Specification	Qty	Price per qty	Subtotal	
Insulated Copper tube	5/8"Ø x 1/4"Ø	55 ft	₱ 400.00 /ft	₱ 22,000.00	
Royal Cord (Comm wire)	2.0 sq.mm x 4c	60 ft	100.00 /ft	6,000.00	
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00	
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00	
Pipe Hanger Assembly	Clamp and Full thread	8 pc	420.00 /pc	3,360.00	
Rubber Insulation	2½" x 3/4" x 6'	7 pc	₱ 350.00 /pc	₱ 2,450.00	
Estimated Charges					₱ 43,610.00

ACU #:	28	Unit Model:	KSG-IWF-30WFY8K1M32	Unit Capacity/Type:	3.0HP Wall Mounted Inverter
Estimated Pipe Length	=	57	ft		
Estimated Royal Cord Length	=	62	ft		
Initial Charge					₱ 8,500.00
10ft Copper tube					
10ft Royal Cord					
Outdoor bracket Wall/Floor					
Consumables					
Testing and Commisioning					
Installation Materials	Specification	Qty	Price per qty	Subtotal	
Insulated Copper tube	5/8"Ø x 1/4"Ø	47 ft	₱ 400.00 /ft	₱ 18,800.00	
Royal Cord (Comm wire)	2.0 sq.mm x 4c	52 ft	100.00 /ft	5,200.00	
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00	
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00	
Pipe Hanger Assembly	Clamp and Full thread	6 pc	420.00 /pc	2,520.00	
Rubber Insulation	2½" x 3/4" x 6'	5 pc	₱ 350.00 /pc	₱ 1,750.00	
Estimated Charges					₱ 38,070.00

THIRD FLOOR

Location/s:	Premium Room A	Area:	48.00 sqm.
--------------------	----------------	--------------	------------

ACU #:	29	Unit Model:	KSG-IWF-30WY8K1M32	Unit Capacity/Type:	3.0HP Wall Mounted Inverter
---------------	----	--------------------	--------------------	----------------------------	-----------------------------

Estimated Pipe Length = 60 ft

Estimated Royal Cord Length = 65 ft

Initial Charge ₱ 8,500.00

10ft Copper tube
10ft Royal Cord
Outdoor bracket Wall/Floor
Consumables
Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	50 ft	₱ 400.00 /ft	₱ 20,000.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	55 ft	100.00 /ft	5,500.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	7 pc	420.00 /pc	2,940.00
Rubber Insulation	2 1/8" x 3/4" x 6'	6 pc	₱ 350.00 /pc	₱ 2,100.00

Estimated Charges ₱ 40,340.00

Location/s:	Premium Room B	Area:	58.00 sqm.
--------------------	----------------	--------------	------------

ACU #:	30	Unit Model:	KSG-IWF-30WY8K1M32	Unit Capacity/Type:	3.0HP Wall Mounted Inverter
---------------	----	--------------------	--------------------	----------------------------	-----------------------------

Estimated Pipe Length = 70 ft

Estimated Royal Cord Length = 75 ft

Initial Charge ₱ 8,500.00

10ft Copper tube
10ft Royal Cord
Outdoor bracket Wall/Floor
Consumables
Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	60 ft	₱ 400.00 /ft	₱ 24,000.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	65 ft	100.00 /ft	6,500.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	9 pc	420.00 /pc	3,780.00
Rubber Insulation	2 1/8" x 3/4" x 6'	7 pc	₱ 350.00 /pc	₱ 2,450.00

Estimated Charges ₱ 46,530.00

Location/s:	Deluxe Room 9		Area:	sqm.
ACU #:	31	Unit Model:	KSG-IWF-30Wfy8K1M32	Unit Capacity/Type: 3.0HP Wall Mounted Inverter
Estimated Pipe Length = 50 ft Estimated Royal Cord Length = 55 ft Initial Charge ₱ 8,500.00 10ft Copper tube 10ft Royal Cord Outdoor bracket Wall/Floor Consumables Testing and Commisioning				
Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	40 ft	₱ 400.00 /ft	₱ 16,000.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	45 ft	100.00 /ft	4,500.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	5 pc	420.00 /pc	2,100.00
Rubber Insulation	2½" x 3/4" x 6'	4 pc	₱ 350.00 /pc	₱ 1,400.00
Estimated Charges				₱ 33,800.00

Location/s:	Deluxe Room 8		Area:	36.00 sqm.
ACU #:	32	Unit Model:	KSG-IWF-30Wfy8K1M32	Unit Capacity/Type: 3.0HP Wall Mounted Inverter
Estimated Pipe Length = 37 ft Estimated Royal Cord Length = 42 ft Initial Charge ₱ 8,500.00 10ft Copper tube 10ft Royal Cord Outdoor bracket Wall/Floor Consumables Testing and Commisioning				
Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	27 ft	₱ 400.00 /ft	₱ 10,800.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	32 ft	100.00 /ft	3,200.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	2 pc	420.00 /pc	840.00
Rubber Insulation	2½" x 3/4" x 6'	2 pc	₱ 350.00 /pc	₱ 700.00
Estimated Charges				₱ 25,340.00

Location/s:	Deluxe Room 7		Area:	36.00 sqm.
ACU #:	33	Unit Model:	KSG-IWF-30Wfy8K1M32	Unit Capacity/Type: 3.0HP Wall Mounted Inverter
Estimated Pipe Length = 34 ft Estimated Royal Cord Length = 39 ft Initial Charge ₱ 8,500.00 10ft Copper tube 10ft Royal Cord Outdoor bracket Wall/Floor Consumables Testing and Commisioning				
Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	24 ft	₱ 400.00 /ft	₱ 9,600.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	29 ft	100.00 /ft	2,900.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	1 pc	420.00 /pc	420.00
Rubber Insulation	2½" x 3/4" x 6'	1 pc	₱ 350.00 /pc	₱ 350.00
Estimated Charges				₱ 23,070.00

Location/s:	Deluxe Room 6		Area:	36.00 sqm.
ACU #:	34	Unit Model:	KSG-IWF-30Wfy8K1M32	Unit Capacity/Type: 3.0HP Wall Mounted Inverter
Estimated Pipe Length = 37 ft Estimated Royal Cord Length = 42 ft Initial Charge ₱ 8,500.00 10ft Copper tube 10ft Royal Cord Outdoor bracket Wall/Floor Consumables Testing and Commisioning				
Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	27 ft	₱ 400.00 /ft	₱ 10,800.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	32 ft	100.00 /ft	3,200.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	2 pc	420.00 /pc	840.00
Rubber Insulation	2½" x 3/4" x 6'	2 pc	₱ 350.00 /pc	₱ 700.00
Estimated Charges				₱ 25,340.00

Location/s:	Deluxe Room 5	Area:	36.00 sqm.
--------------------	---------------	--------------	------------

ACU #:	35	Unit Model:	KSG-IWF-30Wfy8K1M32	Unit Capacity/Type:	3.0HP Wall Mounted Inverter
---------------	----	--------------------	---------------------	----------------------------	-----------------------------

Estimated Pipe Length = 34 ft

Estimated Royal Cord Length = 39 ft

Initial Charge ₱ 8,500.00

10ft Copper tube
10ft Royal Cord
Outdoor bracket Wall/Floor
Consumables
Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	24 ft	₱ 400.00 /ft	₱ 9,600.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	29 ft	100.00 /ft	2,900.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	1 pc	420.00 /pc	420.00
Rubber Insulation	2½" x 3/4" x 6'	1 pc	₱ 350.00 /pc	₱ 350.00

Estimated Charges ₱ 23,070.00

Location/s:	Standard Room 5	Area:	sqm.
--------------------	-----------------	--------------	------

ACU #:	36	Unit Model:	KSG-IWF-25Wfy8K1M32	Unit Capacity/Type:	2.5HP Wall Mounted Inverter
---------------	----	--------------------	---------------------	----------------------------	-----------------------------

Estimated Pipe Length = 33 ft

Estimated Royal Cord Length = 38 ft

Initial Charge ₱ 8,500.00

10ft Copper tube
10ft Royal Cord
Outdoor bracket Wall/Floor
Consumables
Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	23 ft	₱ 400.00 /ft	₱ 9,200.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	28 ft	100.00 /ft	2,800.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Rubber Insulation	2½" x 3/4" x 6'	1 pc	₱ 350.00 /pc	₱ 350.00

Estimated Charges ₱ 22,150.00

Location/s:	Standard Room 6	Area:	25.00 sqm.
--------------------	-----------------	--------------	------------

ACU #:	37	Unit Model:	KSG-IWF-25WFY8K1M32	Unit Capacity/Type:	2.5HP Wall Mounted Inverter
---------------	----	--------------------	---------------------	----------------------------	-----------------------------

Estimated Pipe Length = 39 ft

Estimated Royal Cord Length = 44 ft

Initial Charge ₱ 8,500.00

10ft Copper tube
10ft Royal Cord
Outdoor bracket Wall/Floor
Consumables
Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	29 ft	₱ 400.00 /ft	₱ 11,600.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	34 ft	100.00 /ft	3,400.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	2 pc	420.00 /pc	840.00
Rubber Insulation	2½" x 3/4" x 6'	2 pc	₱ 350.00 /pc	₱ 700.00

Estimated Charges ₱ 26,340.00

Location/s:	Standard Room 7	Area:	25.00 sqm.
--------------------	-----------------	--------------	------------

ACU #:	38	Unit Model:	KSG-IWF-25WFY8K1M32	Unit Capacity/Type:	2.5HP Wall Mounted Inverter
---------------	----	--------------------	---------------------	----------------------------	-----------------------------

Estimated Pipe Length = 34 ft

Estimated Royal Cord Length = 39 ft

Initial Charge ₱ 8,500.00

10ft Copper tube
10ft Royal Cord
Outdoor bracket Wall/Floor
Consumables
Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	24 ft	₱ 400.00 /ft	₱ 9,600.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	29 ft	100.00 /ft	2,900.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Rubber Insulation	2½" x 3/4" x 6'	1 pc	₱ 350.00 /pc	₱ 350.00

Estimated Charges ₱ 22,650.00

Location/s:	Standard Room 8	Area:	25.00 sqm.
--------------------	-----------------	--------------	------------

ACU #:	39	Unit Model:	KSG-IWF-25Wfy8K1M32	Unit Capacity/Type:	2.5HP Wall Mounted Inverter
---------------	----	--------------------	---------------------	----------------------------	-----------------------------

Estimated Pipe Length = 39 ft

Estimated Royal Cord Length = 44 ft

Initial Charge ₱ 8,500.00

10ft Copper tube
10ft Royal Cord
Outdoor bracket Wall/Floor
Consumables
Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	29 ft	₱ 400.00 /ft	₱ 11,600.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	34 ft	100.00 /ft	3,400.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	2 pc	420.00 /pc	840.00
Rubber Insulation	2½" x 3/4" x 6'	2 pc	₱ 350.00 /pc	₱ 700.00

Estimated Charges ₱ 26,340.00

Location/s:	Standard Room 9	Area:	25.00 sqm.
--------------------	-----------------	--------------	------------

ACU #:	40	Unit Model:	KSG-IWF-25Wfy8K1M32	Unit Capacity/Type:	2.5HP Wall Mounted Inverter
---------------	----	--------------------	---------------------	----------------------------	-----------------------------

Estimated Pipe Length = 34 ft

Estimated Royal Cord Length = 39 ft

Initial Charge ₱ 8,500.00

10ft Copper tube
10ft Royal Cord
Outdoor bracket Wall/Floor
Consumables
Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	24 ft	₱ 400.00 /ft	₱ 9,600.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	29 ft	100.00 /ft	2,900.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Rubber Insulation	2½" x 3/4" x 6'	1 pc	₱ 350.00 /pc	₱ 350.00

Estimated Charges ₱ 22,650.00

Location/s:	Standard Room 10	Area:	25.00 sqm.
--------------------	------------------	--------------	------------

ACU #:	41	Unit Model:	KSG-IWF-25Wfy8K1M32	Unit Capacity/Type:	2.5HP Wall Mounted Inverter
---------------	----	--------------------	---------------------	----------------------------	-----------------------------

Estimated Pipe Length = 39 ft

Estimated Royal Cord Length = 44 ft

Initial Charge ₱ 8,500.00

10ft Copper tube
10ft Royal Cord
Outdoor bracket Wall/Floor
Consumables
Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	29 ft	₱ 400.00 /ft	₱ 11,600.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	34 ft	100.00 /ft	3,400.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	2 pc	420.00 /pc	840.00
Rubber Insulation	2½" x 3/4" x 6'	2 pc	₱ 350.00 /pc	₱ 700.00

Estimated Charges ₱ 26,340.00

Location/s:	Standard Room 11	Area:	25.00 sqm.
--------------------	------------------	--------------	------------

ACU #:	42	Unit Model:	KSG-IWF-25Wfy8K1M32	Unit Capacity/Type:	2.5HP Wall Mounted Inverter
---------------	----	--------------------	---------------------	----------------------------	-----------------------------

Estimated Pipe Length = 39 ft

Estimated Royal Cord Length = 44 ft

Initial Charge ₱ 8,500.00

10ft Copper tube
10ft Royal Cord
Outdoor bracket Wall/Floor
Consumables
Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	29 ft	₱ 400.00 /ft	₱ 11,600.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	34 ft	100.00 /ft	3,400.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	2 pc	420.00 /pc	840.00
Rubber Insulation	2½" x 3/4" x 6'	2 pc	₱ 350.00 /pc	₱ 700.00

Estimated Charges ₱ 26,340.00

Location/s:	Standard Room 12	Area:	29.00 sqm.
--------------------	------------------	--------------	------------

ACU #:	43	Unit Model:	KSG-IWF-30Wfy8K1M32	Unit Capacity/Type:	3.0HP Wall Mounted Inverter
---------------	----	--------------------	---------------------	----------------------------	-----------------------------

Estimated Pipe Length = 34 ft

Estimated Royal Cord Length = 39 ft

Initial Charge ₱ 8,500.00

10ft Copper tube
10ft Royal Cord
Outdoor bracket Wall/Floor
Consumables
Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	24 ft	₱ 400.00 /ft	₱ 9,600.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	29 ft	100.00 /ft	2,900.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Rubber Insulation	2½" x 3/4" x 6'	1 pc	₱ 350.00 /pc	₱ 350.00

Estimated Charges ₱ 22,650.00

Location/s:	Standard Room 13	Area:	25.00 sqm.
--------------------	------------------	--------------	------------

ACU #:	44	Unit Model:	KSG-IWF-25Wfy8K1M32	Unit Capacity/Type:	2.5HP Wall Mounted Inverter
---------------	----	--------------------	---------------------	----------------------------	-----------------------------

Estimated Pipe Length = 39 ft

Estimated Royal Cord Length = 44 ft

Initial Charge ₱ 8,500.00

10ft Copper tube
10ft Royal Cord
Outdoor bracket Wall/Floor
Consumables
Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	29 ft	₱ 400.00 /ft	₱ 11,600.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	34 ft	100.00 /ft	3,400.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	2 pc	420.00 /pc	840.00
Rubber Insulation	2½" x 3/4" x 6'	2 pc	₱ 350.00 /pc	₱ 700.00

Estimated Charges ₱ 26,340.00

Location/s:	Standard Room 14	Area:	25.00	sqm.
--------------------	------------------	--------------	-------	------

ACU #:	45	Unit Model:	KSG-IWF-25WFY8K1M32	Unit Capacity/Type:	2.5HP Wall Mounted Inverter
---------------	----	--------------------	---------------------	----------------------------	-----------------------------

Estimated Pipe Length = 37 ft

Estimated Royal Cord Length = 42 ft

Initial Charge ₱ 8,500.00

10ft Copper tube

10ft Royal Cord

Outdoor bracket Wall/Floor

Consumables

Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	27 ft	₱ 400.00 /ft	₱ 10,800.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	32 ft	100.00 /ft	3,200.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	2 pc	420.00 /pc	840.00
Rubber Insulation	2½" x 3/4" x 6'	2 pc	₱ 350.00 /pc	₱ 700.00

Estimated Charges ₱ 25,340.00

Location/s:	Standard Room 15	Area:	23.00	sqm.
--------------------	------------------	--------------	-------	------

ACU #:	46	Unit Model:	KSG-IWF-25WFY8K1M32	Unit Capacity/Type:	2.5HP Wall Mounted Inverter
---------------	----	--------------------	---------------------	----------------------------	-----------------------------

Estimated Pipe Length = 50 ft

Estimated Royal Cord Length = 55 ft

Initial Charge ₱ 8,500.00

10ft Copper tube

10ft Royal Cord

Outdoor bracket Wall/Floor

Consumables

Testing and Commisioning

Installation Materials	Specification	Qty	Price per qty	Subtotal
Insulated Copper tube	5/8"Ø x 1/4"Ø	40 ft	₱ 400.00 /ft	₱ 16,000.00
Royal Cord (Comm wire)	2.0 sq.mm x 4c	45 ft	100.00 /ft	4,500.00
Royal Cord (Power Supply)	(#12) 3.5 sqmm. x 3c	5 ft	60.00 /ft	300.00
Circuir Breaker Weather Proof	30Amps / 1Ph	1 pc	1,000.00 /pc	1,000.00
Pipe Hanger Assembly	Clamp and Full thread	5 pc	420.00 /pc	2,100.00
Rubber Insulation	2½" x 3/4" x 6'	4 pc	₱ 350.00 /pc	₱ 1,400.00

Estimated Charges ₱ 33,800.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Indoor Location based in floor plan only.
- 2 Proposed copper tube lay out (green color) location for outdoor units (red color) based on floor plan are subject for **approval**.
- 3 AC drain line will be provided by the customer's contractor.
- 4 Assumed ceiling height on all rooms are 2.7 meters.
- 5 Mechanical Plans, Permits, Electrical permits not included.
- 6 Issuance of waiver for air conditioning units states that are undersized in relation to the floor plan's specified allowable model type per area is as follows, this also may result to reduced the compresor warranty:


Location	Floor Area	Koin's Unit Recommendation			Based on floor plan	
		Qty	Capacity / Type	Model	Qty	Type
Wine Bar	56 sqm	2	4.0HP Floor Mounted	KLG-IF40-5G1M32	1	Wall Mounted
Kitchen	60 sqm	2	6.0HP Floor Ceiling	KLM-IC60-AA1M32	2	Wall Mounted
Co-Working Space	75 sqm	2	4.0HP Floor Mounted	KLG-IF40-5G1M32	2	Wall Mounted
Function Room	220 sqm	6	6.0HP Floor Mounted	KL-IF60-G6H1M32	5	Wall Mounted
Premium Room A	48	1	4.0HP Floor Mounted	KLG-IF40-5G1M32	1	Wall Mounted
Premium Room B	58	1	6.0HP Floor Mounted	KL-IF60-G6H1M32	1	Wall Mounted
Deluxe Room 9	35	1	4.0HP Floor Mounted	KLG-IF40-5G1M32	1	Wall Mounted

- 6 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 7 Air conditioning drain line and Electrical power supply (feeder line) 220v/ 60hz/ 1ph, should be provided by customer's contractor.
- 8 **Final charges will be based on actual installation.**

Prepared by:



Engr. Kenneth Zamora
Service Supervisor
Field and Shop Supervisor

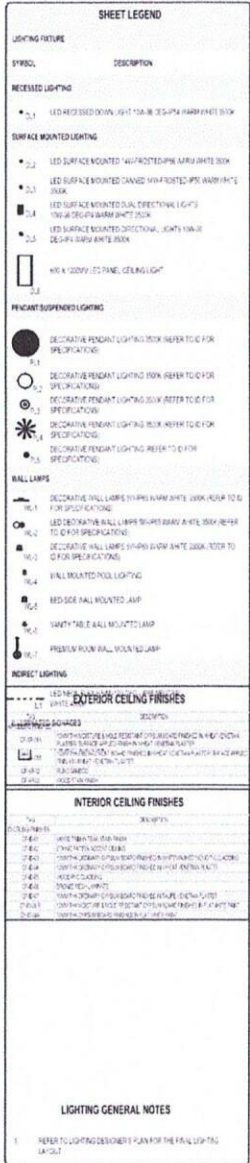

1

AT-481.02.02 SCALE 1:100

[illegible]

KEY PLAN

CEILING PLANS

3/10/2011 PM 1:00
DATE ISSUED: 11/04/00
DATE REVISED: 11/04/00 9:54 PM
SCALE: 1/8"=1'-0"

00111-01
A1100.02.02
SCALE: 1/8"=1'-0"

please add a copy of the signed consent form to the research file. Thank you for your contribution to the research and for your participation in the research project.

