



September 29, 2025

UY-SO RESIDENCE
87 KENNEDY ST. NORTH GREENHILLS, SAN JUAN CITY
ATTN: ENGR. ROMMEL CALINGASAN
TEL#: 0960-3817873

Dear Ma'am/Sir,

Kolin Marketing Inc., is extremely honored for your endorsement of Kolin brand and we are please to offer you with a special price/s for the following items.

A. EQUIPMENT & INSTALLATION

QTY	U/M	MODEL / DESCRIPTION	SRP	DISCOUNTED PRICE		AMOUNT
4	UNIT/S	MODEL: KLM-IC60-AA1M32 KOLIN FLOOR/CEILING AIRCONDITIONER 55,503 Kj/h (5.0TR) INVERTER R-32 SINGLE PHASE	151,995.00	115,516.20	PHP	462,064.80
6	UNIT/S	MODEL: KLM-IC40-AA1M32 KOLIN FLOOR/CEILING AIRCONDITIONER 37,980 Kj/h (3.0TR) DC INVERTER R-32	117,995.00	89,676.20	PHP	538,057.20
1	UNIT/S	MODEL: KSG-IWF-30WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 29,500 Kj/h (3.0HP) FULL DC INVERTER W/ WIFI R-32	76,595.00	51,212.20	PHP	51,212.20
3	UNIT/S	MODEL: KSG-IWF-25WFF-8K1M32 KOLIN WALL MOUNTED PRIMUS GOLD AIRCONDITIONER 25,560 Kj/h (2.5HP) FULL DC INVERTER W/ WIFI R-32	68,995.00	45,436.20	PHP	136,308.60
TOTAL UNIT COST					PHP	1,187,642.80
ESTIMATED COST OF INSTALLATION (please see attached)					PHP	551,510.00
TOTAL UNIT COST					PHP	1,739,152.80

TERMS OF PAYMENT:

FULL PAYMENT OF UNIT AND DELIVERY CHARGE. IF CHECK, SUBJECT FOR 3 DAYS CLEARING.

WARRANTY:

FOR FLOOR/CEILING: ONE (1) YEAR FREE PARTS AND LABOR, FIVE (5) YEARS WARRANTY ON COMPRESSOR.

FOR SPLIT TYPE : ONE (1) YEAR FREE PARTS AND LABOR, THREE YEARS (3) MAIN PCB , TEN (10) YEARS WARRANTY ON COMPRESSOR.

NOTES: PRICES ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.

PRICES IS VAT INCLUSIVE.

**** Cost of Installation is Package with the Unit(s), this cost cannot avail separately (cost will be based on actual works).**

***** You may settle first payment for unit/s & delivery. Installation payment can be settled directly to installer after actual works.**

We thank you for giving opportunity to offer our product and services, hoping we receive your purchase order.

If you need assistance, don't hesitate to call the under signed at 0917-807-8607 or email at kmi_asst@kolinphil.com.ph

**** This quotation is based on provided floor plan only. subject for actual survey once location is available.**

Very Truly Yours,

JANELLEN S. LIM
KMI-ASSISTANT

Noted by:
MART NATHANIEL R. FLORES
KMI-SUPERVISOR

Approved By:

MS. EDITHA M. FLORES
AVP - FINANCE

KMI-QUOTE-09-25-0700
REG-24%/7K

Conforme:

SIGNATURE OVER PRINTED NAME

Kolin Marketing, Inc.
1854 Sta. Rita St., Guadalupe Nuevo, Makati City
Tel.: (632) 8852-6473
Fax: (632) 8852-2170 / (632) 8852-4792
www.kolinphil.com.ph / kolinphilippines

September 29, 2025

UY SO RESIDENCES

87 Kennedy st. North Greenhills Subdivision, San Juan City

MODEL	Qty
KLM-IC60-AA1M32	4
KLM-IC40-AA1M32	6
KSG-IWF-30Wfy8K1M32	1
KSG-IWF-25Wfy8K1M32	3

FAMILY ROOM		Area	27 sqm
-------------	--	------	--------

ACU 1 2.5 HP Wall Mounted Inverter *KSG-IWF-25Wfy8K1M32*

Estimated Pipe Length = 37 ft

Estimated Royal Cord Length = 42 ft

Initial Charge ₱ 8,500.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (Wall)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	27 ft	₱ 400.00/ft	₱ 10,800.00
Royal Cord (comm. wire)	2.mm2 x 4C	32 ft	₱ 100.00/ft	₱ 3,200.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	5 pc/s	₱ 350.00/pc	₱ 1,750.00
Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
Metal Clamp	3"	8 pc/s	₱ 120.00/pc	₱ 960.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 18,610.00

Estimated Charges	₱ 27,110.00
--------------------------	--------------------

BEDROOM1		Area	23 sqm
----------	--	------	--------

ACU 2 2.5 HP Wall Mounted Inverter *KSG-IWF-25Wfy8K1M32*

Estimated Pipe Length = 46 ft

Estimated Royal Cord Length = 51 ft

Initial Charge ₱ 8,500.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (Wall)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	36 ft	₱ 400.00/ft	₱ 14,400.00
Royal Cord (comm. wire)	2.mm2 x 4C	41 ft	₱ 100.00/ft	₱ 4,100.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	8 pc/s	₱ 350.00/pc	₱ 2,800.00
Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
Metal Clamp	3"	10 pc/s	₱ 120.00/pc	₱ 1,200.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 24,520.00

Estimated Charges	₱ 33,020.00
--------------------------	--------------------

GYM	Area	29 sqm
------------	------	--------

ACU 3	3.0 HP Wall Mounted Inverter	KSG-IWF-30Wfy8K1M32
--------------	------------------------------	----------------------------

Estimated Pipe Length = 43 ft

Estimated Royal Cord Length = 48 ft

₱ 8,500.00

Initial Charge

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Outdoor Bracket (Wall)

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	33 ft	₱ 400.00/ft	₱ 13,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	38 ft	₱ 100.00/ft	₱ 3,800.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	7 ft	₱ 60.00/ft	₱ 420.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	4 pc/s	₱ 350.00/pc	₱ 1,400.00
Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
Metal Clamp	3"	6 pc/s	₱ 120.00/pc	₱ 720.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 21,140.00

Estimated Charges	₱ 29,640.00
--------------------------	-------------

MAIN KITCHEN	Area	29 sqm
---------------------	------	--------

ACU 4	4.0 HP Ceiling Suspended Inverter	KLM-IC40-AA1M32
--------------	-----------------------------------	------------------------

Estimated Pipe Length = 43 ft

Estimated Royal Cord Length = 50 ft

₱ 12,000.00

Initial Charge

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	33 ft	₱ 400.00/ft	₱ 13,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	40 ft	₱ 100.00/ft	₱ 4,000.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	5 ft	₱ 70.00/ft	₱ 350.00
Circuit Breaker waterproof	40A/ Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	4 pc/s	₱ 350.00/pc	₱ 1,400.00
Full thread	3/8" x 10'	4 pc/s	₱ 150.00/pc	₱ 600.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	3 pc/s	₱ 200.00/pc	₱ 600.00
				₱ 27,650.00

Estimated Charges	₱ 39,650.00
--------------------------	-------------

LIVING

Area 92 sqm

ACU 5 6.0 HP Ceiling Suspended Inverter**KLM-IC60-AA1M32**

Estimated Pipe Length = 66 ft

Estimated Royal Cord Length = 71 ft

Initial Charge

₱ 15,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	56 ft	₱ 400.00/ft	₱ 22,400.00
Royal Cord (comm. wire)	2.mm2 x 4C	61 ft	₱ 100.00/ft	₱ 6,100.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	7 ft	₱ 70.00/ft	₱ 490.00
Circuit Breaker waterproof	60A/ 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	9 pc/s	₱ 350.00/pc	₱ 3,150.00
Full thread	3/8" x 10'	6 pc/s	₱ 150.00/pc	₱ 900.00
Metal Clamp	3"	12 pc/s	₱ 120.00/pc	₱ 1,440.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	3 pc/s	₱ 200.00/pc	₱ 600.00
				₱ 42,580.00

Estimated Charges**₱ 57,580.00****ACU 6 6.0 HP Ceiling Suspended Inverter****KLM-IC60-AA1M32**

Estimated Pipe Length = 50 ft

Estimated Royal Cord Length = 55 ft

Initial Charge

₱ 15,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	40 ft	₱ 400.00/ft	₱ 16,000.00
Royal Cord (comm. wire)	2.mm2 x 4C	45 ft	₱ 100.00/ft	₱ 4,500.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	5 ft	₱ 70.00/ft	₱ 350.00
Circuit Breaker waterproof	60A/ 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	8 pc/s	₱ 350.00/pc	₱ 2,800.00
Full thread	3/8" x 10'	6 pc/s	₱ 150.00/pc	₱ 900.00
Metal Clamp	3"	12 pc/s	₱ 120.00/pc	₱ 1,440.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	3 pc/s	₱ 200.00/pc	₱ 600.00
				₱ 34,090.00

Estimated Charges**₱ 49,090.00**

DINING	Area	82 sqm
---------------	------	--------

ACU 7 6.0 HP Ceiling Suspended Inverter **KLM-IC60-AA1M32**

Estimated Pipe Length = 33 ft

Estimated Royal Cord Length = 38 ft

Initial Charge ₱ 15,000.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	23 ft	₱ 400.00/ft	₱ 9,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	28 ft	₱ 100.00/ft	₱ 2,800.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	5 ft	₱ 70.00/ft	₱ 350.00
Circuit Breaker waterproof	60A/ 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	4 pc/s	₱ 350.00/pc	₱ 1,400.00
Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
Metal Clamp	3"	5 pc/s	₱ 120.00/pc	₱ 600.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	3 pc/s	₱ 200.00/pc	₱ 600.00
				₱ 22,750.00

Estimated Charges	₱ 37,750.00
--------------------------	-------------

PRIMARY ANTEROOM	Area	26 sqm
-------------------------	------	--------

ACU 8 2.5 HP Wall Mounted Inverter **KSG-IWF-25Wfy8K1M32**

Estimated Pipe Length = 33 ft

Estimated Royal Cord Length = 40 ft

Initial Charge ₱ 8,500.00

Includes:

- Labor
- 10ft Copper Tube
- 10ft Royal Cord
- Outdoor Bracket (Wall)
- Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 1/4" x Ø 5/8"	23 ft	₱ 400.00/ft	₱ 9,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	30 ft	₱ 100.00/ft	₱ 3,000.00
Royal Cord (ACCU-Breaker)	3.5mm x 3c	5 ft	₱ 60.00/ft	₱ 300.00
Circuit Breaker waterproof	30A / 1Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	3 pc/s	₱ 350.00/pc	₱ 1,050.00
Full thread	3/8" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
Metal Clamp	3"	5 pc/s	₱ 120.00/pc	₱ 600.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
				₱ 15,750.00

Estimated Charges	₱ 24,250.00
--------------------------	-------------

BEDROOM2	Area	40 sqm
-----------------	------	--------

ACU 9 4.0 HP Ceiling Suspended Inverter	KLM-IC40-AA1M32
---	------------------------

Estimated Pipe Length = 66 ft

Estimated Royal Cord Length = 71 ft

Initial Charge ₱ 12,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	56 ft	₱ 400.00/ft	₱ 22,400.00
Royal Cord (comm. wire)	2.mm2 x 4C	61 ft	₱ 100.00/ft	₱ 6,100.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	5 ft	₱ 70.00/ft	₱ 350.00
Circuit Breaker waterproof	40A/ Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	8 pc/s	₱ 350.00/pc	₱ 2,800.00
Full thread	3/8" x 10'	4 pc/s	₱ 150.00/pc	₱ 600.00
Metal Clamp	3"	12 pc/s	₱ 120.00/pc	₱ 1,440.00
PVC blue	3/4" x 10'	1 pc/s	₱ 150.00/pc	₱ 150.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
				₱ 41,340.00

Estimated Charges	₱ 53,340.00
--------------------------	-------------

BEDROOM3	Area	38 sqm
-----------------	------	--------

ACU 10 4.0 HP Ceiling Suspended Inverter	KLM-IC40-AA1M32
--	------------------------

Estimated Pipe Length = 69 ft

Estimated Royal Cord Length = 74 ft

Initial Charge ₱ 12,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	59 ft	₱ 400.00/ft	₱ 23,600.00
Royal Cord (comm. wire)	2.mm2 x 4C	64 ft	₱ 100.00/ft	₱ 6,400.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	5 ft	₱ 70.00/ft	₱ 350.00
Circuit Breaker waterproof	40A/ Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	8 pc/s	₱ 350.00/pc	₱ 2,800.00
Full thread	3/8" x 10'	6 pc/s	₱ 150.00/pc	₱ 900.00
Metal Clamp	3"	12 pc/s	₱ 120.00/pc	₱ 1,440.00
PVC blue	3/4" x 10'	2 pc/s	₱ 150.00/pc	₱ 300.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
				₱ 43,290.00

Estimated Charges	₱ 55,290.00
--------------------------	-------------

BEDROOM4	Area 37 sqm
-----------------	------------------

ACU 11 4.0 HP Ceiling Suspended Inverter **KLM-IC40-AA1M32**

Estimated Pipe Length = 43 ft

Estimated Royal Cord Length = 50 ft

Initial Charge

₱ 12,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	33 ft	₱ 400.00/ft	₱ 13,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	40 ft	₱ 100.00/ft	₱ 4,000.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	5 ft	₱ 70.00/ft	₱ 350.00
Circuit Breaker waterproof	40A/ Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	4 pc/s	₱ 350.00/pc	₱ 1,400.00
Full thread	3/8" x 10'	6 pc/s	₱ 150.00/pc	₱ 900.00
Metal Clamp	3"	6 pc/s	₱ 120.00/pc	₱ 720.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	1" x 10'	2 pc/s	₱ 200.00/pc	₱ 400.00
				₱ 28,470.00

Estimated Charges	₱ 40,470.00
--------------------------	-------------

PRIMARY WALK IN CLOSET	Area 42 sqm
-------------------------------	------------------

ACU 12 4.0 HP Ceiling Suspended Inverter **KLM-IC40-AA1M32**

Estimated Pipe Length = 43 ft

Estimated Royal Cord Length = 50 ft

Initial Charge

₱ 12,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials	Description	Qty	Price per qty	Subtotal
Copper Tube	Ø 3/8" x Ø 5/8"	33 ft	₱ 400.00/ft	₱ 13,200.00
Royal Cord (comm. wire)	2.mm2 x 4C	40 ft	₱ 100.00/ft	₱ 4,000.00
Royal Cord (ACCU-Breaker)	5.5mm x 3c	5 ft	₱ 70.00/ft	₱ 350.00
Circuit Breaker waterproof	40A/ Ph	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	2 1/8" x 3/4" x 6'	3 pc/s	₱ 350.00/pc	₱ 1,050.00
Full thread	3/8" x 10'	6 pc/s	₱ 150.00/pc	₱ 900.00
Metal Clamp	3"	8 pc/s	₱ 120.00/pc	₱ 960.00
PVC blue	1" x 10'	2 pc/s	₱ 200.00/pc	₱ 400.00
Indoor bracket	Fab. floor/ceiling	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	Fabricated wall	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
				₱ 28,360.00

Estimated Charges	₱ 40,360.00
--------------------------	-------------

PRIMARY BEDROOM	Area	45 sqm
------------------------	------	--------

ACU 13 4.0 HP Ceiling Suspended Inverter	KLM-IC40-AA1M32
--	-----------------

Estimated Pipe Length = 15 ft

Estimated Royal Cord Length = 20 ft

Initial Charge

₱ 12,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	5 ft	₱ 400.00/ft	₱ 2,000.00
Royal Cord (comm. wire)	10 ft	₱ 100.00/ft	₱ 1,000.00
Royal Cord (ACCU-Breaker)	5 ft	₱ 70.00/ft	₱ 350.00
Circuit Breaker waterproof	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Full thread	4 pc/s	₱ 150.00/pc	₱ 600.00
Indoor bracket	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
PVC blue	2 pc/s	₱ 200.00/pc	₱ 400.00
			₱ 11,850.00

Estimated Charges

₱ 23,850.00

OPEN AREA	Area	40 sqm
------------------	------	--------

ACU 14 6.0 HP Ceiling Suspended Inverter	KLM-IC60-AA1M32
--	-----------------

Estimated Pipe Length = 43 ft

Estimated Royal Cord Length = 48 ft

Initial Charge

₱ 12,000.00

Includes:

Labor

10ft Copper Tube

10ft Royal Cord

Consumables

Installation Materials

Description	Qty	Price per qty	Subtotal
Copper Tube	33 ft	₱ 400.00/ft	₱ 13,200.00
Royal Cord (comm. wire)	38 ft	₱ 100.00/ft	₱ 3,800.00
Royal Cord (ACCU-Breaker)	5 ft	₱ 70.00/ft	₱ 350.00
Circuit Breaker waterproof	1 pc/s	₱ 1,000.00/pc	₱ 1,000.00
Rubber Insulation	4 pc/s	₱ 350.00/pc	₱ 1,400.00
Full thread	4 pc/s	₱ 150.00/pc	₱ 600.00
Metal Clamp	8 pc/s	₱ 120.00/pc	₱ 960.00
PVC blue	2 pc/s	₱ 150.00/pc	₱ 300.00
Indoor bracket	1 pc/s	₱ 1,500.00/pc	₱ 1,500.00
Outdoor bracket	1 pc/s	₱ 5,000.00/pc	₱ 5,000.00
			₱ 28,110.00

Estimated Charges


₱ 40,110.00

Validity: This quotation is valid for a period of fifteen (15) days from the date thereof, subject to our confirmation thereafter.

Installation notes:

- 1 Location based in floor plan only.
- 2 AC drain line will be tapped to the nearest drain provision provided by the customer's contractor.
- 3 Need for marking and site visit before installation.
- 4 Coppertube expose inside the area.
- 5 Working days: Monday to Saturday, 8am- 5pm with parking. Need working permit.
- 6 Mechanical Plans, Permits, Electrical permits not included.
- 7 Deflectors, masonry, carpentry, chipping & plastering (finishing & restoration) are not included in the installation.
- 8 Air conditioning drain line and Electrical power supply (feeder line) **220v/ 60hz/ 1ph**, should be provided by customer's contractor.
- 9 **Final charges will be based on actual installation.**

Prepared by:



Jeffrey Dadios

Field Surveyor


Customer Conformance:

Signature Over Printed Name


Reviewed by:


Engr. Kenneth Zamora

Service Supervisor Shop and
Field Operation

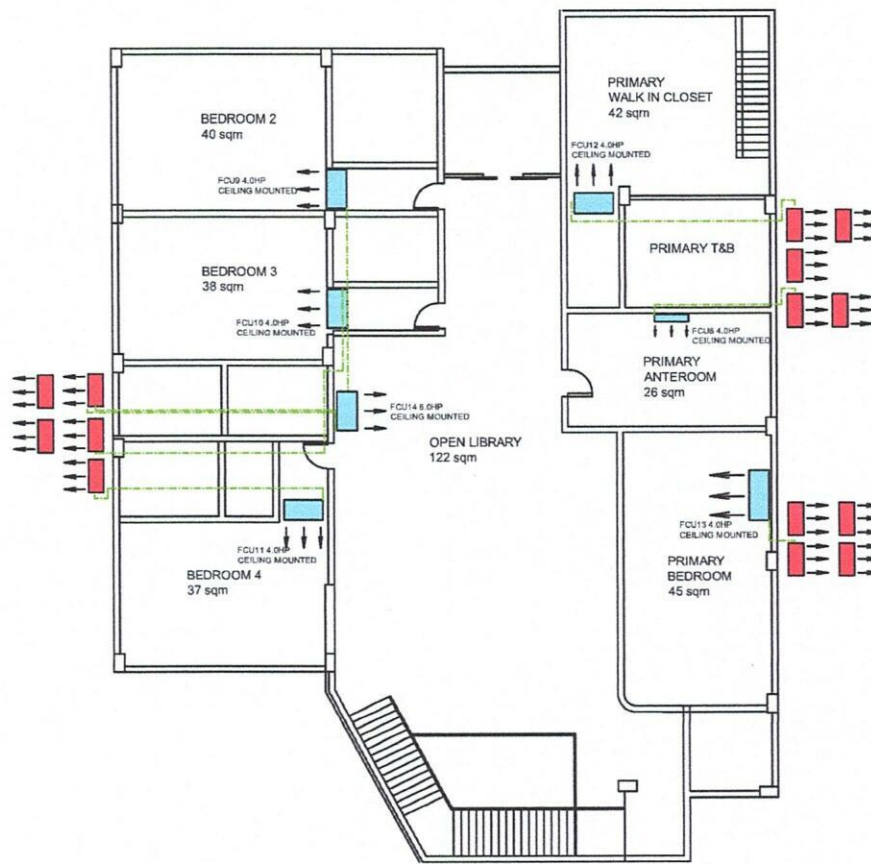

SECOND FLOOR

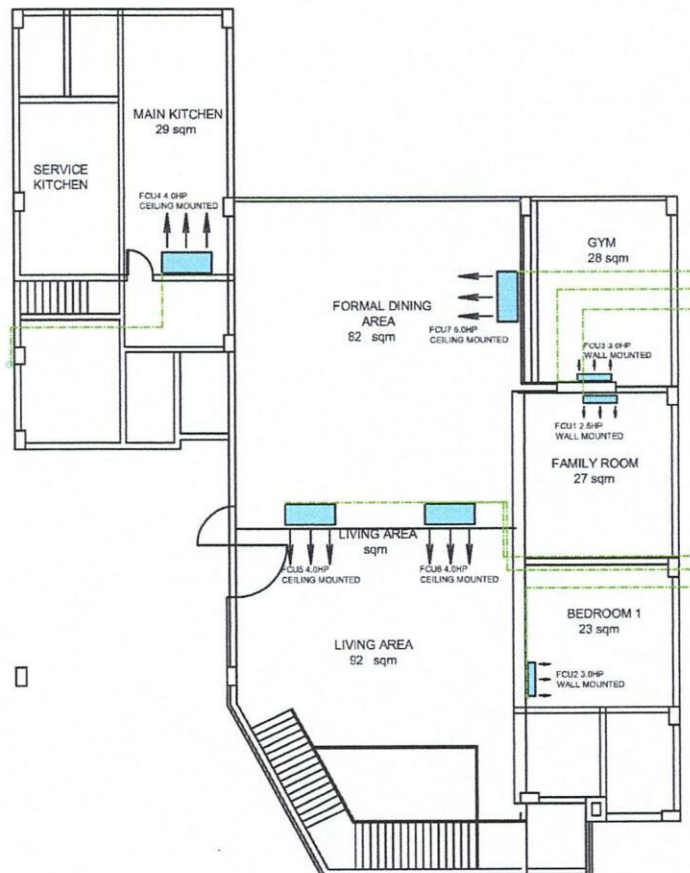

GROUND FLOOR